

UNCLASSIFIED

AD NUMBER
ADB019911
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; JUL 1975. Other requests shall be referred to Air Force Armament Laboratory, ATTN: DLJC, Eglin AFB, FL 32542.
AUTHORITY
AFATL ltr dtd 31 Oct 1977

THIS PAGE IS UNCLASSIFIED

AD NO.
DDC FILE COPY

ADBO19911



AFATL-TR-75-87 VOLUME I

EXTERNAL STORE AIRLOADS
PREDICTION TECHNIQUE

VOLUME I - *bu 3014 637*

TECHNICAL SUMMARY

VOUGHT SYSTEMS DIVISION
LTV AEROSPACE CORPORATION
P. O. BOX 5907
DALLAS, TEXAS 75222

JULY 1975


FINAL REPORT: JANUARY 1973 - JUNE 1975

Distribution limited to U. S. Government agencies only;
this report documents test and evaluation; distribution
limitation applied July 1975 . Other requests for
this document must be referred to the Air Force Armament
Laboratory (DLJC), Eglin Air Force Base, Florida 32542.

AIR FORCE ARMAMENT LABORATORY

AIR FORCE SYSTEMS COMMAND • UNITED STATES AIR FORCE

EGLIN AIR FORCE BASE, FLORIDA

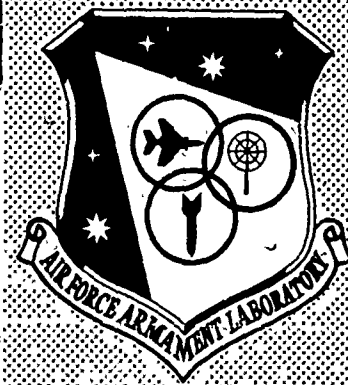

COPY AVAILABLE TO DDC DOES NOT
PERMIT FULL LEGAL PROTECTION

DDC
JUL 13 1975
C

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER	
18 AFATL TR-75-87, Vol. <u>1</u>		9	
4. TITLE (and Subtitle)		5. TYPE OF REPORT & PERIOD COVERED	
6 EXTERNAL STORE AIRLOADS PREDICTION TECHNIQUE, Volume I. Technical Summary,		Final Report 8 January 1973 to 30 June 1975	
7. AUTHOR		8. PERFORMING ORG. REPORT NUMBER	
10 A. R. Rudnicki, Jr., E. G. Waggoner, Jr., C. T. Alexander R. D. Gallagher		14 2-57110/5R-3225- <u>10-1</u>	
9. PERFORMING ORGANIZATION NAME AND ADDRESS		15 F08635-73-C-0010/ Project No. FY7621-72-2G001	
VOUGHT SYSTEMS DIVISION LTV AEROSPACE CORPORATION P.O. BOX 5907 DALLAS, TEXAS 75222		16	
11. CONTROLLING OFFICE NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
Air Force Armament Laboratory Armament Development and Test Center Eglin Air Force Base, Florida 32542		Project No. <u>5613</u> Task No. <u>17-02</u> Work Unit No. <u>01</u>	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE	
12 160p.		11 July 1975	
		13. NUMBER OF PAGES	
		161	
		18. SECURITY CLASS. (of this report)	
		UNCLASSIFIED	
		18a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report)			
Distribution limited to U.S. Government agencies only; this report documents test and evaluation; distribution limitation applied July 1975. Other requests for this document must be referred to the Air Force Armament Laboratory (DLJC), Eglin Air Force Base, Florida 32542.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
Available in DDC			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)			
Captive Store Airloads Predictions Single Store Carriage Multiple Store Carriage			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)			
Presented is an empirical method to compute six-component captive store airloads for single and multiple carriage store configurations for an arbitrary aircraft. The method has the capability for computing the basic airload and the incremental airloads due to aircraft yaw and adjacent store interference. The single carriage method was developed for the Mach range 0.5 to 2.0 while the multiple carriage method is valid for the Mach range 0.5 to 1.6. Both single and multiple carriage methods were developed for the angle of attack range -4 to +12 degrees and the aircraft yaw angle range -8 to +8 degrees. Comparisons between			

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
E/N 0102-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

408116

1/B

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. (Concluded)

predicted and experimental data show generally good agreement. The report is presented in two volumes. Volume I is the technical summary report describing the program and approach used to develop the prediction technique. Volume II is the user's manual consisting of five separate books.

RTIS
DOC
UNANNOUNCED
JUSTIFICATION

White Section ☐
Buff Section ☒

DISTRIBUTION/AVAILABILITY CODES

Dist.	AVAIL. and/or SPECIAL
B	23

522

UNCLASSIFIED

SUMMARY

This is Volume I of the report which presents a method developed by the contractor to predict six-component, captive store airloads for both single and multiple carriage configurations. Volume I describes the experimental and correlation studies and discusses the approach used in developing the empirical method. Volume II of the report provides a detailed manual to guide the user. The prediction method was developed through an empirical correlation of a large experimental data base. The data base was derived from two general sources. The primary source was a test program in the AEDC 4T wind tunnel using parametric variations in store loadings on the .05 scale A-7 and F-4 models as parent vehicles. A secondary and complementary source resulted from an extensive survey of government agencies and private contractors for pertinent captive store airloads data.

The prediction method enables the user to calculate captive store airloads for individual stores and to account for variations in aircraft angle of attack, yaw, and adjacent store interference. The ranges of Mach numbers, angles of attack, and aircraft yaw angles for which the method is applicable are as follows.

	<u>Mach Number</u>	<u>α</u> <u>degrees</u>	<u>ψ</u> <u>degrees</u>
Single Carriage	0.5 - 2.0	-4 to +12	-8 to +8
Multiple Carriage	0.5 - 1.6	-4 to +12	-8 to +8

Limitations which should be imposed on the use of this method were established largely by the data used in its derivation, but the method appears sufficiently versatile to meet most preliminary design requirements.

PREFACE

This report was prepared under the sponsorship of the Air Force Armament Laboratory, Armament Development and Test Center, Eglin Air Force Base, Florida, under Contract Number F08635-73-C-0070 (Project No. FY7621-72-2G001). The cognizant Air Force technical monitors on the program were Messrs. Robert A. Hume, Jr. and Charlie D. Turner, Jr. The work was performed by Vought Systems Division of LTV Aerospace Corporation, P.O. Box 5907, Dallas, Texas 75222. Principal investigator for this program was R. D. Gallagher. Principal technical personnel were: A. R. Rudnicki, Jr., E. G. Waggoner, Jr., and C. T. Alexander. This effort was conducted during the period from 8 January 1973 to 30 June 1975.

This report consists of two volumes. Volume I, the technical summary, describes the program and approach used to develop the prediction technique. Volume II, the user's manual, consists of five books. This is Volume I.

This technical report has been reviewed and is approved for publication.

FOR THE COMMANDER



WILLIAM F. BROCKMAN, Colonel, USAF
Chief, Munitions Division

TABLE OF CONTENTS

Section	Page
I. INTRODUCTION.....	1
II. TECHNICAL INFORMATION SURVEY.....	3
2.1 Survey Procedure.....	3
2.1.1 Approach for Contractor and Government Agency Data.....	4
2.1.2 Approach to Aircraft/Weapon System Program Offices.....	5
2.1.3 Technical Literature Searches.....	5
2.2 Agencies Contacted in Survey.....	6
2.2.1 Air Force Facilities.....	6
2.2.2 Navy Facilities.....	6
2.2.3 Other Government Facilities.....	7
2.2.4 Industry Facilities.....	7
2.3 Nature of Data Solicited.....	8
2.4 Survey Results.....	9
2.4.1 Mach Number.....	10
2.4.2 Store and Store Installation Type.....	10
2.4.3 Data Origin.....	11
III. WIND TUNNEL TEST PROGRAM.....	12
3.1 Program Description and Test Capabilities.....	12
3.2 Test Variables.....	14
IV. PREDICTION TECHNIQUE.....	19
4.1 Basic Approach.....	23
4.2 Prediction Equations.....	25
4.3 Mach Number Effects.....	33
V. ASSESSMENT OF APPLICABILITY AND ACCURACY OF THE PREDICTION METHOD.....	37
REFERENCES.....	40
APPENDIX A AIRCRAFT - EXTERNAL STORE DATA INDEX AND BIBLIOGRAPHY.....	41

LIST OF FIGURES

Figure	Title	Page
1	Instrumented Multiple Carriage Store Hardware	15
2	Instrumented Single Carriage Store Hardware	16
3	Typical Test Installation Configuration - Six Instrumented M117 Stores on F-4 Inboard Pylon.	17
4	A-7 and F-4 Instrumented Store Test Capability.	18
5	Typical Isolated Store Aerodynamic Characteristics.	21
6	Captive Store Side Force Characteristics.	21
7	Captive Store Yawing Moment Characteristics	22
8	Single Carriage Prediction Equations - $M=0.5$	29
9	Derivation of Side Force Slope Spanwise Correction.	31
10	Comparison of Pylon Height Correction	32
11	Side Force Slope - Generalized Mach Number Variation.	33
12	Generalized Mach Number Break Points.	35
13	Example of Mach Number Effects on Side Force Slope.	36

LIST OF TABLES

Table	Title	Page
1	SUMMARY OF NOMINAL METHOD ACCURACIES.....	39
A-1	GUIDE TO AIRCRAFT-STORE DATA INDEXES.....	42

SECTION I

INTRODUCTION

Determination of the aerodynamic forces and moments acting on individual components of an aircraft is a part of the design process to assure that adequate load-carrying structure is provided for all design flight conditions. Accurate information on the aerodynamic loads experienced by external stores carried on high performance aircraft is an important factor. An early prediction of this store airloads is important to the design process of achieving aerodynamic compatibility between the aircraft and stores. The flow environment in which external stores are immersed is generally highly complex and affected by many variables, e.g., flight conditions and physical characteristics of the aircraft, store installation, and adjacent stores. Successful prediction of quantitative data utilizing analytical techniques has proven to be difficult, although some techniques have been used successfully to predict qualitative trends. The strong influence of viscous flow, particularly at transonic speeds with multiple carriage store arrangements, has made current methods inadequate for many applications. The most reliable method by which the engineer can provide store airloads continues to be through wind tunnel testing. This latter process is normally complex and expensive and too often provides airloads data late in the design effort, after many decisions influencing aircraft/store compatibility have already been made.

A study program was conducted by the contractor to develop a generalized technique to predict aerodynamic loads acting on airborne external stores. Considering the relatively low effectiveness and inherent limitations of present analytical methods, an experimental data correlation approach was selected for developing the prediction technique that is rapid and easy to use, versatile in application to various aircraft and store configurations, applicable to maneuvering flight conditions at subsonic, transonic, and low supersonic speeds, and adequately accurate for store/store installation design purposes.

The objectives of this program were accomplished in two phases. The initial phase involved the collection, documentation, and correlation of existing airloads data upon which to initiate the technique development and preparations for wind tunnel testing. The second phase of the program consisted of conducting the wind tunnel test program to complete the required supporting data, performing detailed data correlations, and developing the final prediction technique.

This report describes the work performed and the results obtained during all phases of the study program. The various sections delineate specific tasks which were performed. Descriptions of both the technical information survey and wind tunnel test planning and preparations are included. A discussion of the approach to the prediction technique, including the dominant parameters, is also presented. Finally, an assessment of the capabilities and nominal accuracies that the method offers is discussed.

SECTION II

TECHNICAL INFORMATION SURVEY

An extensive data survey was performed by the contractor to locate and acquire data and related information on captive store and store installation airloads. Acquiring these data was necessary to develop correlations essential to the prediction technique development and to provide guidelines in planning the wind tunnel test program. Although data were known to exist on numerous store types and store installations, problems in acquiring useful airloads data were apparent. These problems included: the inter-industry and inter-service dispersion of data; the diverse origin of airloads data, i.e., wind tunnel, inflight, and analytical; and the assorted approaches used in measuring airloads, i.e., measured on the installed stores, on the carriage rack or pylon, or on the total aircraft-store combinations. The following paragraphs explain the general survey approach, the organizations surveyed, the type of data solicited, and the broad survey results.

2.1 SURVEY PROCEDURE

Early survey planning identified three primary avenues by which the required technical data could be identified. Selection of these avenues, which were chosen to encompass the majority of data acquisition sources, also provided a built-in cross-reference system which minimized the possibility of overlooking pertinent data. Listed below are the primary approach avenues followed:

- Airframe and weapon contractors and government agencies
- Aircraft/weapon system program offices
- Technical literature surveys

A comprehensive stores data bank had been previously compiled by the contractor largely through in-house efforts and as a result of a previous Air Force study contract. Hence,

data sought through the survey were largely data which had become available since the previous survey. Although all the data identified through the survey were not obtained, efforts to acquire those data deemed most relevant to the program were highly successful. The following paragraphs outline the approach used in each case.

2.1.1 Approach for Contractor and Government Agency Data

As an initial step in the data survey, an official government letter was prepared jointly by the Air Force technical monitor and contractor personnel. This letter was forwarded to selected industry and government organizations which were thought to possess or have control of useful technical data. This correspondence defined the origin, objectives, and benefits of the program and requested voluntary participation of the recipient organization in the program. Each recipient was also requested to identify available external store-aircraft data by completing and forwarding an enclosed survey questionnaire. The questionnaire, which had been prepared by contractor personnel, listed categories which could be used to generally define the applicable data from any document.

As these completed questionnaires were received by the contractor, all information entered on the questionnaire was reviewed. The described documents were checked against the files of the existing VSD external stores data bank to avoid duplications, and decisions were made as to the specific applicability of the listed data to the study. When priority data were recognized, a follow-up contact was made to the questionnaire respondent to arrange a review of the desired information. In some cases, personal visits were arranged to inspect the data and permit detailed data evaluation. These follow-up visits were essential to the survey as they provided a forum for exchanging ideas, defined the specific data that existed and could be made available, and outlined available avenues for obtaining data release. In those instances where it was practical, follow-up

contacts were made by telephone to discuss the available data and arrange for data transferral.

A response was obtained from essentially every Navy and Air Force organization receiving the data questionnaire. Completed questionnaires were also received from most airframe and weapon contractors who were contacted. Subsection 2.2 lists all private and government agencies contacted during the survey that responded with an expressed intent to participate in the data survey.

2.1.2 Approach to Aircraft/Weapon System Program Offices

Personal visits or telephone contacts within select major aircraft/weapon system program offices were made by contractor personnel in conjunction with the survey. These contacts were especially fruitful since numerous technical references and related literature were normally revealed for a particular aircraft/weapon system. The volume of technical data available at a given project office was found to be directly proportional to how recent the aircraft had been in production. While many references were not found on file at a given project office, many were obtainable through other sources such as the DDC or NASA technical libraries or the originating private contractor. In general, a high degree of cooperation was exhibited by the project offices. This cooperation was evident not only in providing data references but also by identifying cognizant individuals within the program offices and/or the industrial facilities through which references might be made available or additional data identified.

2.1.3 Technical Literature Searches

Extensive use was made of the standard Defense Documentation Center (DDC) and National Aeronautics and Space Administration (NASA) technical literature libraries. Specific requests were made for technical bibliographies covering the period

since the previous data survey by the contractor. In this manner, literature which had been generated since the last survey could be reviewed with little redundancy in effort. In addition, other technical bibliographies on the subject were acquired and screened and specific reports acquired. Many of the documents which were requested and found to be directly applicable to the program would not have been identified through the various other approaches. Hence, although time-consuming and tedious, this approach proved highly useful in the identification of pertinent documents.

2.2 AGENCIES CONTACTED IN SURVEY

Selection of both industry and government agencies for the technical data survey was based upon past activities of these organizations in the subject technical area. All facilities which received questionnaires and provided useful data are listed below. Degree and temperament of the participation varied widely, and all efforts performed by the participating facilities were on an entirely voluntary basis, i.e., completion of the survey questionnaire, the data coordination activity, and duplication and forwarding of the data.

2.2.1 Air Force Facilities

- Arnold Engineering Development Center
- Edwards Air Force Base
- Eglin Air Force Base
- Wright-Patterson Air Force Base

2.2.2 Navy Facilities

- Naval Air Development Center
- Naval Air Systems Command
- Naval Air Test Center
- Naval Missile Center
- Naval Ordnance Laboratory
- Naval Ship Research and Development Center

- Naval Weapons Center
- Naval Weapons Laboratory

2.2.3 Other Government Facilities

- NASA - Ames Research Center
- NASA - Langley Research Center
- Picatinny Arsenal

2.2.4 Industry Facilities

- Aerojet Ordnance and Manufacturing Company
- Beech Aircraft Corporation
- The Boeing Company - Seattle
- The Boeing Company - Wichita
- Calspan Corporation
- Cessna Aircraft Corporation
- EDO Corporation
- Fairchild-Fairchild Republic Division
- Flight Systems Inc.
- FMC Corporation
- General Dynamics - Convair Division
- General Dynamics - Electro Dynamic Division
- Goodyear Aerospace Corporation
- Honeywell, Inc. - Ordnance Division
- Hughes Aircraft Company - Missile Systems Division
- Lockheed - California Company
- Martin Marietta Aerospace - Ordnance Division
- McDonnell Douglas Corporation-McDonnell Aircraft Company
- Nielsen Engineering
- Northrup Corporation - Aircraft Division
- Rockwell International - B-1 Division
- Rockwell International - Missile System Division
- Sanders Associates Inc.
- Sandia Corporation - Sandia Laboratories
- Sargent-Fletcher Company

- Teledyne Ryan Aeronautical Company
- Westinghouse Electric Corporation

2.3 NATURE OF DATA SOLICITED

Aerodynamic data and information, as summarized in this subsection, were requested to support the study. The desired data involved stores and store installations and parent aircraft. This information could generally be classified in three broad categories: experimental data, existing prediction methods and data correlations, and related literature on the subject. A further breakdown of the experimental data includes aerodynamic force and moment data, both wind tunnel and inflight, and flow field information. The aerodynamic force and moment data include those obtained for individual stores, racks, pylons, or aircraft, such that airloads on individual installed stores can be defined. Free-stream store data were also sought to be used as a base in isolating store-aircraft interference effects. Data for all types of store loading arrangements were solicited. These included data for stores mounted singly or on MER or TER racks, single and multiple rail launchers, conformal pallets, etc., on both wing and fuselage stations.

Techniques capable of predicting airload components for stores carried in the flow field of aircraft were also solicited. In general, these prediction techniques were found to be limited in application. However, most techniques present an approach to the treatment of certain parameters which are considered primary independent variables influencing the store airloads. These include such parameters as aircraft attitude and flight condition, store geometry, location and installation, and adjacent interference. Hence, these correlation and prediction techniques were a useful aid in the formulation of the general prediction method.

2.4 SURVEY RESULTS

The data survey resulted in the acquisition of a considerable amount of data pertaining to stores and store installations which were not in the original contractor data bank. Much of the experimental data acquired provides total aircraft airloads due to the combined aircraft-store configuration. While useful in determining general store effects, it is difficult to isolate individual store or store installation airloads from these data. Extensive individual store and store installation airloads data were found to exist on the A-7, F-4, and F-111 aircraft. The majority of data on these aircraft consists of metric store and metric pylon airloads where a balance mounted internal to the store or pylon installation measures the applied aerodynamic forces and moments. Other aircraft for which store airloads have been acquired are the A-4, A-6, F-5, F-86, F-105, F-100 as defined in the bibliography index of Appendix A and various wing-fuselage combinations.

Included in Appendix A is a bibliography of the literature acquired having specific application to this study. All reports originating from both contractors and government agencies obtained during the survey effort are included in the bibliography.

An index to the bibliography is also included in Appendix A, Tables A-2 through A-17. The index enables the reader to rapidly establish the general type and range of data available for a given aircraft-store type. Free-stream store, rack, and/or pylon airload data are also defined in the index. Table A-1 simplifies the use of the index by defining the respective table and page number containing data on a given aircraft and/or store type. In compiling the index, an effort was also made to emphasize data having higher general interest and/or usage, such as airload prediction methods, bibliographies, flow field data, etc.

The following summary observations are made concerning the specific flight condition and geometry variables encompassed by the survey data and the general nature of the data. The significance of these observations is best realized when it is explained that the developed prediction capability for a given variable and the selected

conditions/configurations for wind tunnel testing are a direct function of the available data quantity and quality.

2.4.1 Mach Number

Data coverage for the desired subsonic-to-supersonic Mach number range was generally acquired with lesser quantities being available for the supersonic region. The majority of acquired data defines airloads in the subsonic flight regime. In the supersonic flight regime data are generally limited to single store carriage installations; however, substantial multiple store installation data were obtained well into the transonic region. F-4 and F-111 store airloads data comprise the majority of the supersonic data. The available A-7 store airloads data are limited to subsonic and transonic flight although considerable A-7 supersonic data were acquired in wind tunnel tests conducted as part of this study.

2.4.2 Store and Store Installation Type

Store and store installation airloads were acquired for a variety of store types. However, there has not been a great quantity of data acquired for any one store type mounted on various aircraft. These data are necessary to isolate the effects of certain variables, or at least to remove the variance in store geometry as an independent variable. Data were not obtained through the survey effort for many flight conditions, loading arrangements, and geometric parameters. In many cases, only limited data exist. A review of the bibliography index of Appendix A for each aircraft type will provide a more detailed insight into the extent of data available for a given store. Considerable free-stream store aerodynamic data were also obtained which were useful in isolating aircraft/store interference effects.

In regard to store installation type, the bulk of the data acquired consisted of wing pylon singly and multiply carried stores. Limited data are available on fuselage mounted installations, including multiple and singly carried stores, both tangent and pylon mounted.

Sparse data exist for TER, wing tip-mounted, fuselage semi-submerged, wing tangent and semi-submerged, and conformal store installations.

2.4.3 Data Origin

Wind tunnel data comprised most of the acquired data while inflight data were mainly for total aircraft drag. In essentially every case where inflight data were located, the originator(s) voiced concern over the validity of the data due to irregularities stemming from erratic instrumentation readouts and difficulties in controlling the flight conditions.

SECTION III

WIND TUNNEL TEST PROGRAM

Early in the study planning it was recognized that sufficient airloads data did not exist for developing the prediction techniques from empirical correlations. Also, it was impractical to expect that data accumulated from the varied sources would be thorough enough to establish predictable trends for all priority variables whose contributions collectively constitute captive store airloads. The practical solution seemed to be to compile all available airloads data, review these data to identify voids where additional data were needed, and then perform a wind tunnel test program to acquire complementary airloads data through a systematic testing approach. The contractor possessed unique wind tunnel model instrumentation and hardware capable of acquiring extensive store airloads data in a single test run. Much of the model hardware needed to test a wide variation of instrumented store arrangements was already available for high speed testing. It was decided to adapt this hardware to existing F-4 and A-7 wind tunnel models for a test program which would technically and economically satisfy the current study needs. The following subsections describe the test program and include a description of test hardware, test variables encompassed, and related test preparations.

3.1 PROGRAM DESCRIPTION AND TEST CAPABILITIES

The wind tunnel test program consisted of instrumenting both the A-7 and F-4 0.05 scale aircraft models to measure individual store airloads for both single carriage and multiple carriage stores. In addition, the A-7 parent aircraft model was instrumented to obtain six-component aircraft force and moment data simultaneously with the instrumented store data.

Two types of internal strain gage balances were employed during the test program to obtain individual store aerodynamic force and moment data, depending upon whether the stores are mounted on single or multiple carriage racks. The five-component VSB-12 series balances (excludes drag) were used on both F-4 and A-7 test programs

to obtain multiple carriage store airloads data. The instrumented MER is designed to carry six of these balances simultaneously, one on each of the six MER stations. Data were obtained at all six MER stations continuously during a run. The M117 (MAU-103A/B fin) and BLU-1C/B (finned and unfinned) firebomb stores were utilized in obtaining multiple carriage rack airloads. Instrumented multiple carriage racks were capable of being tested on all right-hand wing store stations and on fuselage centerline store stations on both the A-7 and F-4 aircraft models. The instrumented MER/store/balance arrangement is illustrated in Figure 1. The six-component VHB-7 series balances were used on both aircraft models to obtain individual store airloads for the single carriage stores. The 300-gallon fuel tank and the Walleye (AGM-62A) store models were used to obtain the single carriage airloads. Instrumented single carriage stores had the capability of being mounted at any wing store station on both the A-7 and F-4 models. Figure 2 illustrates the single/store/balance hardware arrangement while Figure 3 depicts a typical multiple carriage test configuration. Figure 4 provides a summary description of instrumented single and multiple store testing capabilities.

Two added test capabilities which are not obvious from Figure 4 were not originally proposed although they were strongly desired for the program. One of these permits a ± 12 inch (full scale) longitudinal shift relative to the pylon, in the instrumented F-4 single carriage store position, for both inboard and outboard wing pylon stations. This capability provided additional parametric-type store airloads data for the 300-gallon tank and Walleye stores by providing captive airloads data at several chordwise positions. These data were highly valuable to the technique development. Development of the longitudinal shift capability was achieved through a minor innovation of hardware originally proposed and reflected no increase in program cost. The second added capability permitted evaluation of the effects of varying store nose shape for the 300-gallon tank single store and the M117 multiple store. Two basic shapes in addition to the standard nose shape for each store were made available to add the

capability of varying the nose bluntness of each store. In general, the adapters provided a hemispherical nose shape and an ogive shape different from that of the standard nose shape for each store type. All multiple carriage store airloads data for the wind tunnel test program were obtained using an instrumented MER since no instrumented TER hardware currently exists.

3.2 TEST VARIABLES

Any prediction technique derived through an empirical correlation of data requires an adequate data base to be meaningful. The data base must cover the range of variables that dominate captive store airloads. These dominant parameters include store configuration, store spanwise, chordwise, and vertical position, aircraft configuration (wing sweep angle, high/low wing, etc.), aircraft attitude, and flight conditions.

Many of the variables examined during the wind tunnel test program having to do with aircraft/store configuration effects were included in the discussion of test capabilities above (store nose bluntness, aircraft type, chordwise position, spanwise position, etc.). Remaining variables include the range of flight conditions tested. The Mach number range for single carriage configurations varied from 0.5 to 2.0 with data obtained specifically at $M = 0.5, 0.7, 0.9, 1.05, 1.2, 1.6,$ and 2.0 . The Mach number range for multiple carriage configurations varied from 0.5 to 1.6 with data obtained at the same Mach numbers as single carriage excluding Mach 2.0. Difficulties were encountered with model dynamics when testing multiple carriage configurations at Mach 2.0; therefore, this higher Mach number was deleted from the test program. The angle of attack range for all test data varied from -4 to $+12$ degrees while the yaw angle range varied from -8 to $+8$ degrees in four degree increments.

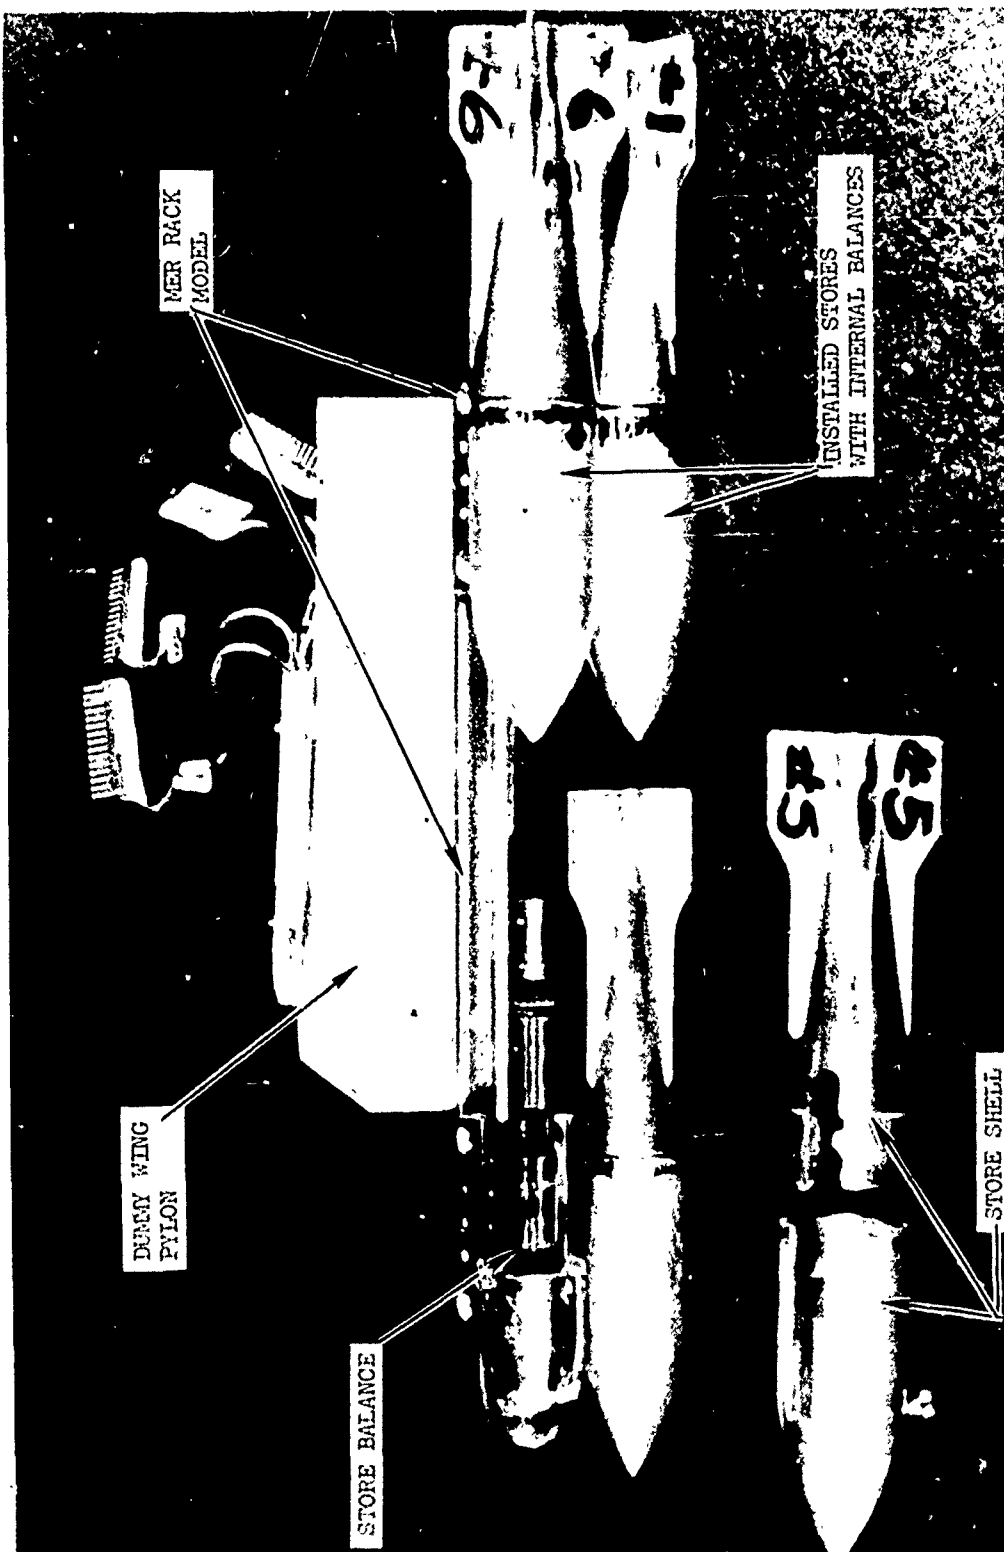


Figure 1. Instrumented Multiple Carriage Store Hardware

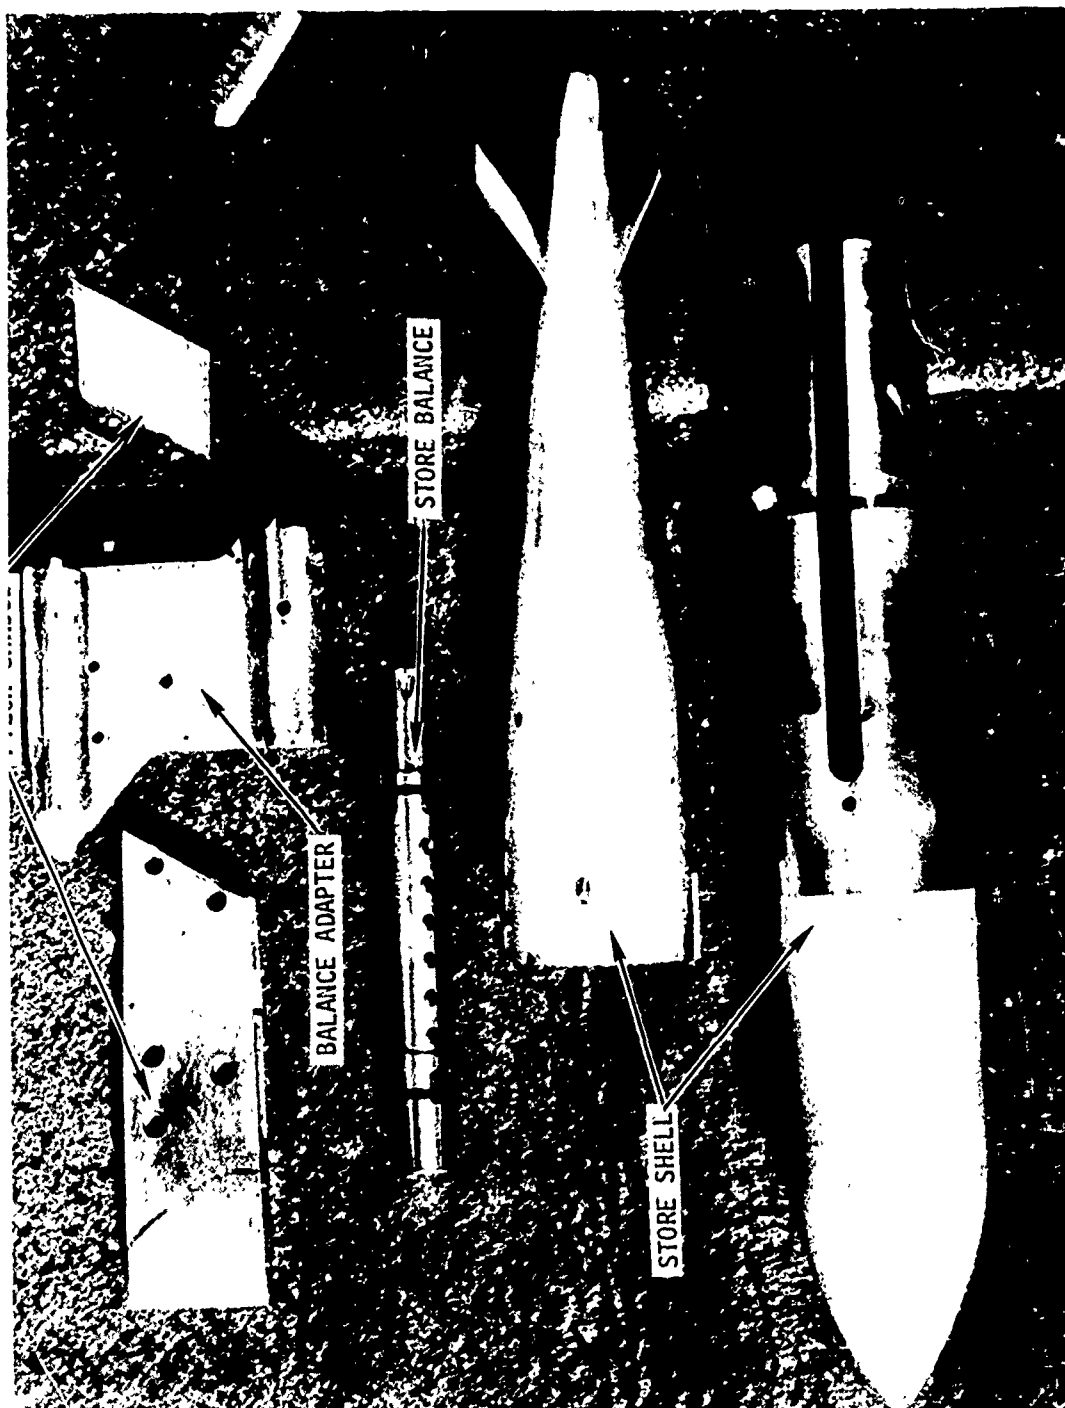


Figure 2. Instrumented Single Carriage Store Hardware


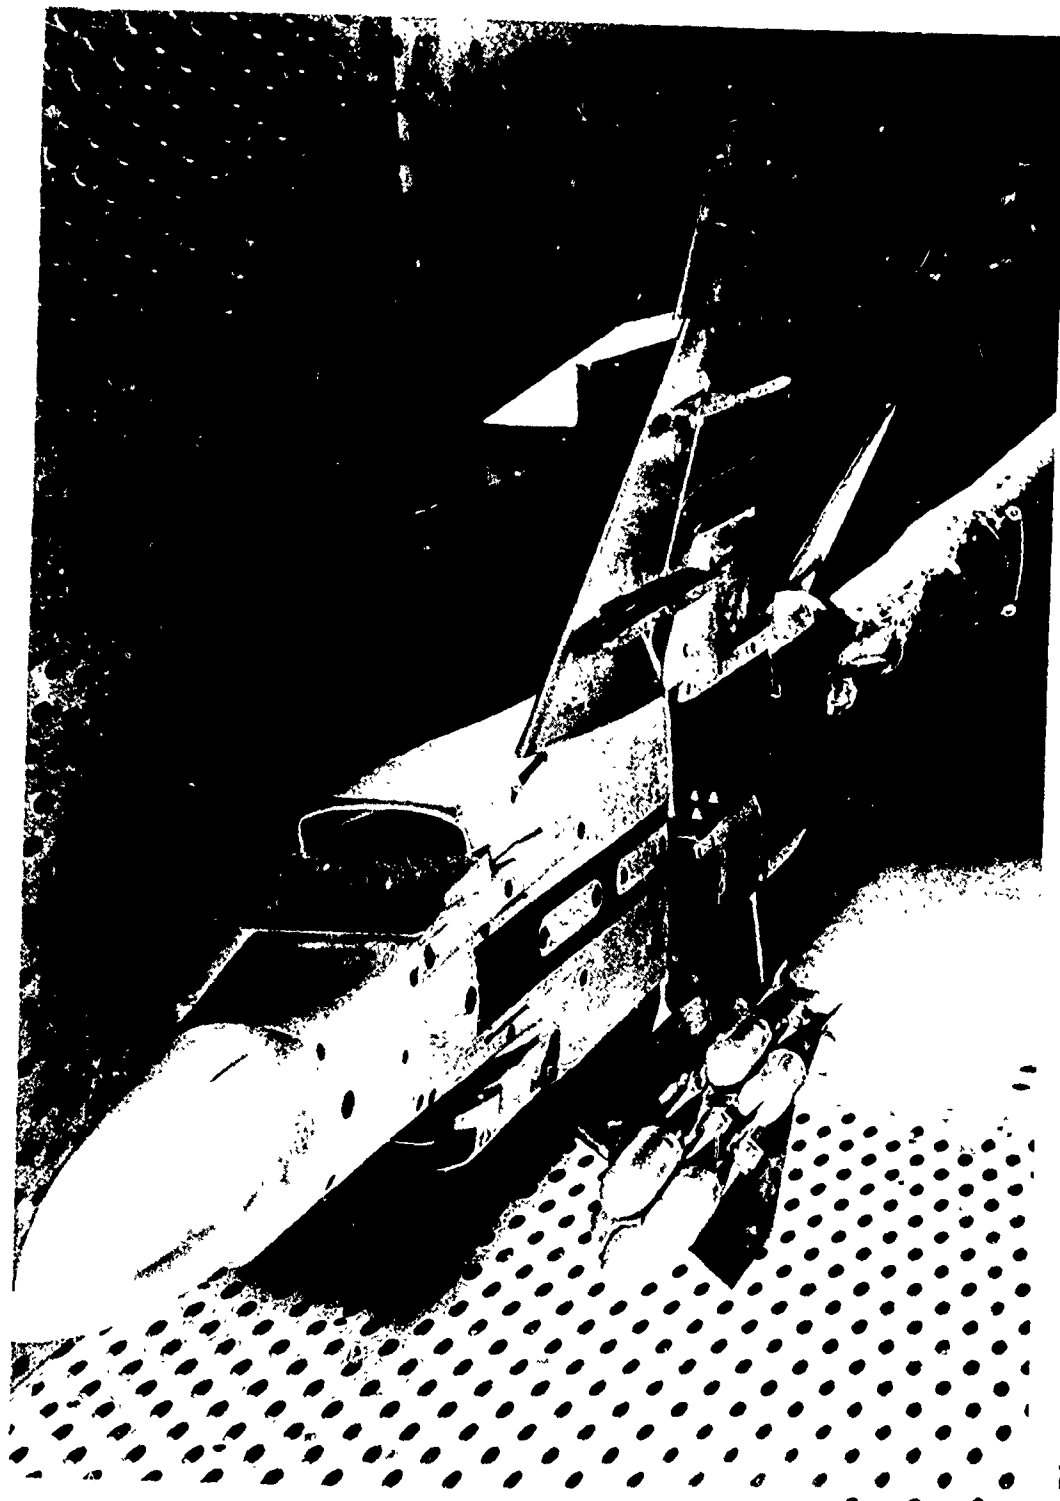


Figure 3. Typical Test Installation Configuration - Six Instrumented M117 Stores on F-4 Inboard Pylon

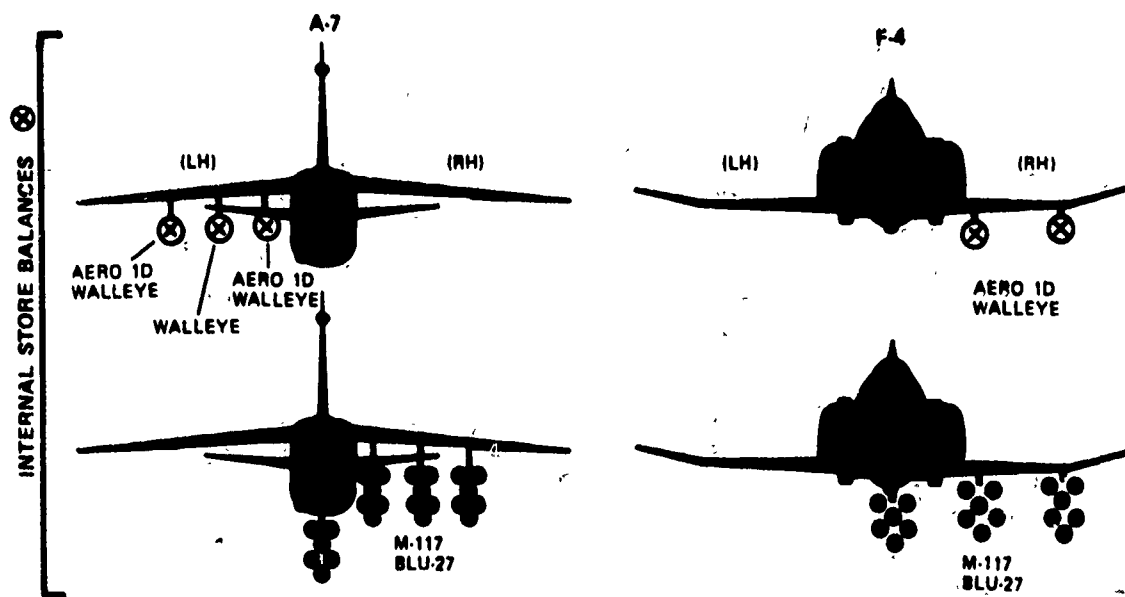

- NOTES:
1. Instrumented MER racks can be carried at each of the pylon stations on the A-7 and F-4 as shown above, but not at more than one station simultaneously.
 2. The instrumented single carriage store can be carried at three A-7 or two F-4 pylon stations simultaneously.

Figure 4. A-7 and F-4 Instrumented Store Test Capability

SECTION IV

PREDICTION TECHNIQUE

Development of the prediction technique was approached as an empirical correlation of existing airloads data combined with the parametric-type wind tunnel data obtained from tests conducted as part of this program to complement the existing data.

The question of how to correlate these data into a prediction method that is both simple and accurate was answered by preliminary comparisons of captive and isolated store data. Aerodynamic characteristics of the captive stores were observed to possess much of the same linear nature as isolated stores. The captive side force characteristics are presented in Figure 6 for the same store whose isolated characteristics are shown in Figure 5. The linear approximation is indicated in each figure by a dashed line and is an adequate representation of the actual quasi-linear data. This linear characteristic found in most of the data greatly simplifies the mathematical expressions needed. Unfortunately the quasi-linear relationship displayed by the captive side force component does not extend to all components for the angle of attack range desired for the prediction technique ($-4/12$ degrees). The captive yawing moment component for the subject store is presented in Figure 7 along with the linear approximation covering the largest portion of the desired angle of attack range. As shown in the figure, significant errors will result using the linear approximation above approximately 8 degrees angle of attack. Even so, there is a linear region to represent a significant part of the aircraft's flight envelope, and the advantages of using the linear approximation for each component far outweigh the disadvantage of some loss in accuracy in a portion of the desired angle of attack range. The user should be aware that if the isolated aerodynamic characteristics of the store are non-linear in nature, then he should expect this non-linearity to be found in the captive airloads. The advantages of linearizing the data base are (1) a simple representation of the component airload by a $y=mx + b$ type equation; (2) a major variable, aircraft angle of attack, is

built into the mathematical component airload representation; and (3) the resulting prediction equations should have a simple linear form. As a result, the data base was linearized so that each airload component could be expressed as a slope (force or moment as a function of angle of attack) and an intercept at zero angle of attack. As a result of the linearized data base, all predictions are accomplished in the form of a predicted slope and intercept for each of the airload components. Because of increasing non-linearity at the larger aircraft angles of attack and yaw angles, significant errors are likely outside the range of applicability stated earlier for these variables. A summary of nominal method accuracy and the angle of attack range for best accuracy for each of the airload components is presented in Section V.

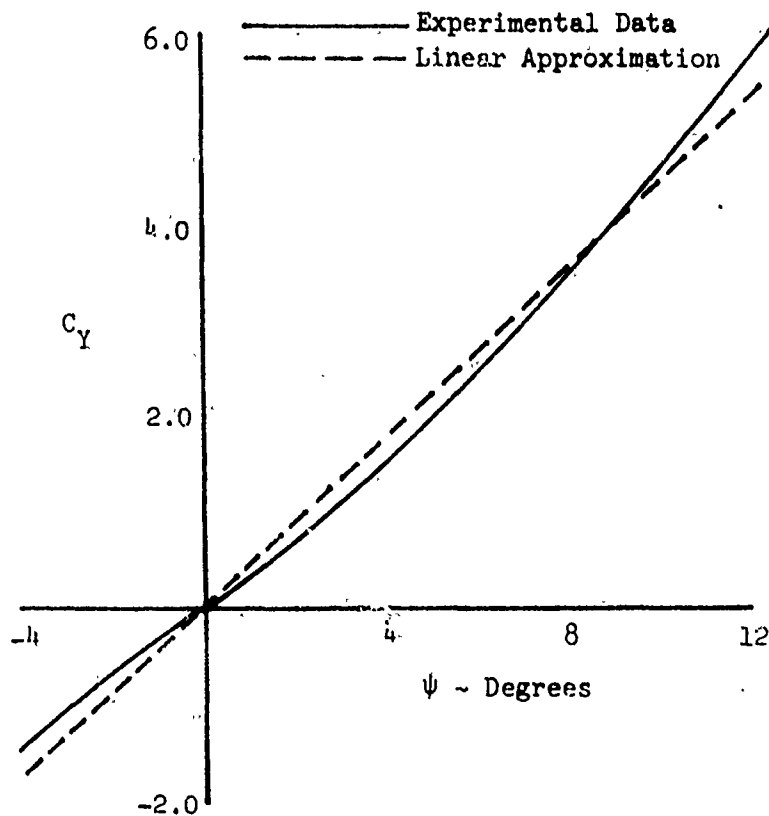


Figure 5. Typical Isolated Store Aerodynamic Characteristics

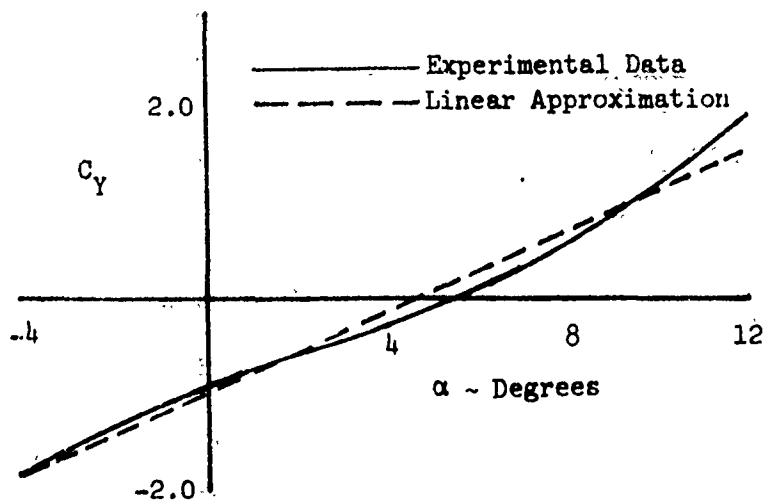


Figure 6. Captive Store Side Force Characteristics

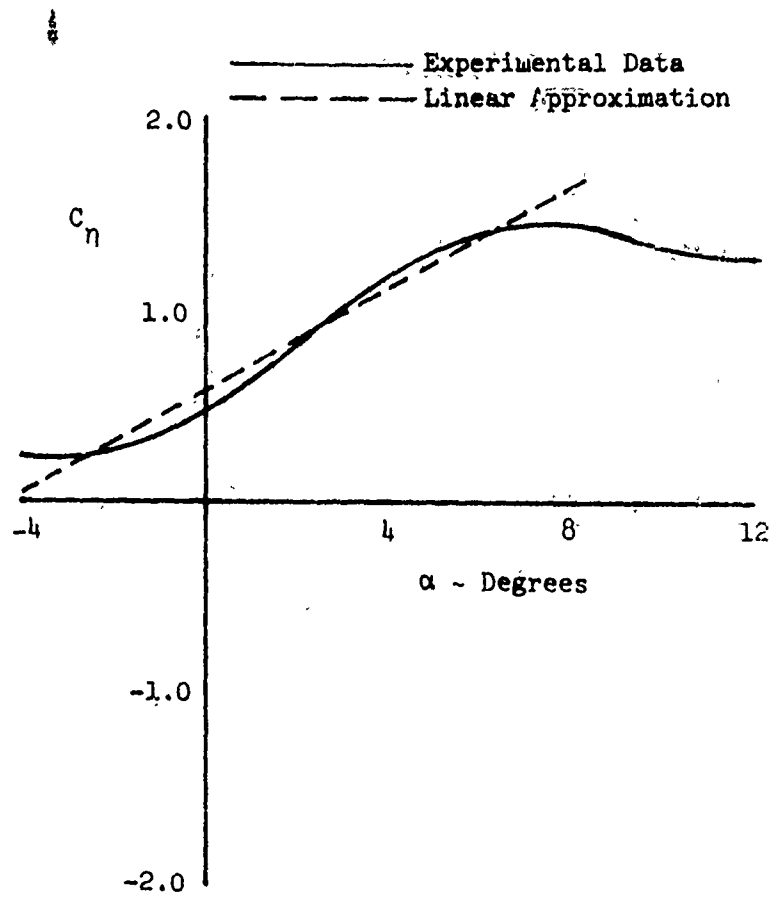


Figure 7. Captive Store Yawing Moment Characteristics

4.1 BASIC APPROACH

A theoretical method must rely on mathematical descriptions of the aircraft components, pylons, racks, and stores to implement potential flow solutions of the store airloads. Any corrections for viscous effects must be handled separately. An empirical method allows much simplification to that approach. The basic approach used in this method applies the concept that captive airloads are the result of a free-stream flow plus the interference effects. In this way, work that has been previously accomplished for free-stream aerodynamic predictions can be used as a base on which to relate captive airloads. This permits the prediction procedure to be a summation process as indicated below.

$$\begin{aligned} \text{Captive Store Airloads} &= \text{Isolated Store Airloads} \\ &+ \text{Interference Effects} \end{aligned}$$

Applying the summation approach to interference increments depends first on airloads for some base configuration. Corrections can then be added to these initial airloads to account for differences between the base configuration and the desired configuration. Predicting these initial airloads is called the initial prediction. It involves assuming the store is in the flow field of a base wing with 45° sweep and installed at a specific spanwise, chordwise, and vertical location. The next step is to obtain a final prediction by applying empirically derived corrections to the initial prediction to compensate for aircraft configuration differences and to account for the effects of the store being in the desired spanwise, chordwise, and vertical location.

This approach was used in correlating the experimental data to develop the prediction method presented here. Correlations to identify airloads for the base configuration implement the initial prediction procedure and were basic to the entire development process. These correlations were performed with $M=0.5$ data to

avoid the increased complexity of compressible flow corrections and shock-induced effects. This is the lowest Mach number of the test data from the wind tunnel tests of this program. Because compressibility effects are normally small at speeds below $M=0.5$, the method is considered valid for low subsonic speeds without Mach number corrections.

Correlations of the data to identify corrections needed to account for Mach number and configuration differences were much more difficult than those for the base data. This greater difficulty results from the many factors which contribute to the aerodynamic differences between the various store installation configurations. Some of these factors are the reason rigorous mathematical solutions are not yet practical for prediction purposes on many installations, particularly for multiple carriage racks. Fortunately, experimental data indicate that some of these differences are either small or compensating so that empirical expressions are possible without including terms which evaluate each contributing parameter. A method has been developed by using the available data to establish predictable trends, and these trends are expressed mathematically. The various terms in the prediction equations have been evaluated from the data correlation so that a complete method, with equations and the supporting figures, is presented in Volume II, Book 1 of this report.

To apply the method, the initial prediction of captive airloads is always made first at $M=0.5$ by assuming the store is inserted into the flow field of the base wing (45° sweep). The initial prediction is made for the basic airload case (i.e., the captive store airload generated by a zero-yaw pitch excursion of the parent aircraft). The incremental captive airloads due to aircraft yaw and the effects of adjacent store interference are predicted as increments to be added to the basic airload. The effects of Mach number are treated as an increment to be added to the prediction at $M=0.5$. At a particular Mach number the total captive airload experienced by a store can be obtained from the following generalized coefficient expression:

$$C_{x \text{ TOTAL}} = C_{x \text{ BASIC}} + \Delta C_{x \beta} \cdot \beta + \Delta C_{x \text{ INTF}}$$

where:

- x - y, η, N, m, A, l representing side force, yawing moment, normal force, pitching moment, axial force, and rolling moment, respectively.
- $C_{x \text{ BASIC}}$ - Basic captive airload generated by a zero yaw pitch excursion of the parent aircraft.
- $C_{x \beta}$ - Incremental airload due to aircraft yaw per degree store yaw angle, β .
- β - Store yaw angle equal to $\psi_{A/C}$ for a right wing store installation and $-\psi_{A/C}$ for a left wing store installation.
- $\Delta C_{x \text{ INTF}}$ - Incremental airload due to the effects of adjacent store interference.

In summary, the total captive airload experienced by a store can be calculated by incrementing the isolated store aerodynamic characteristics through the initial prediction summation procedure for the base wing (45° sweep), applying empirical corrections to arrive at the final prediction for the subject wing, and using the generalized coefficient expression above to sum the major contributions to the installed airload.

4.2 PREDICTION EQUATIONS

The variables used in deriving the final prediction equations for both single and multiple carriage configurations were essentially the same. These variables accounted for store configuration characteristics (both physical and aerodynamic); store spanwise, chordwise, and vertical location in the aircraft flow-field;

the interference effect of the aircraft fuselage and adjacent stores; parent aircraft attitude (pitch and yaw); and Mach number.

As a result of the similarities in the equation forms, only the single carriage M=0.5 prediction equations are presented and discussed here. The intent is to describe typical procedures used in developing the prediction method, leaving details for user instructions to the handbook presented in Volume II of this report. The single carriage prediction equations (for slope and intercept) are presented in chart form for each of the six airload components in Figure 8. An attempt has been made throughout this report to define nomenclature as it is introduced in the text. However, Figure 8 introduces many symbols not discussed in detail in the text. The definitions of these symbols can be found in the list of symbols in Volume II, Books 2 and 3 of this report.

Consider the side force slope prediction equation from Figure 8a.

$$\left(\frac{SF}{q}\right)_{\alpha}^{PRED} = K_{C_{SF}} \left(\frac{SF}{q}\right)_{\psi}^{ISO} K_{\eta} K_{INTF} K_{L} K_{Z} K_{A_1}$$

The initial term, $K_{C_{SF}} \left(\frac{SF}{q}\right)_{\psi}^{ISO}$, in the above equation is the initial prediction discussed in Subsection 4.1. The remaining factors are empirical corrections to the initial prediction to compensate for the effects of the parameters previously mentioned in this section.

The first empirical correction term, K_{η} , is a factor to compensate for the spanwise position of the subject store. This factor was derived from three independent data sources, all of which were contained in the data base consisting of the survey data and the wind tunnel test data. In order to derive a spanwise correction factor, it is desirable to have captive airloads data for several store types on all wing pylons on as many parent aircraft as possible. Two of the previously mentioned data sources came from the survey data. One source, Reference 2, contained the BULLPUP A missile on F-4 inboard and outboard wing pylons. A second source, Reference 1, came from the

test program in which the 300-gallon tank and Walleye stores were tested on all wing pylons of both the A-7 and F-4 aircraft. The third and final data source was a flow-field investigation of a wing-body combination at low subsonic speeds reported in Reference 3. The flow-field investigation reported flow angularities, both in the lateral and vertical planes for semi-span stations $\eta=.25$, $.50$, and $.75$ for a number of chordwise and vertical locations beneath the test wing. Ratioing the sidewash flow angularities from the flow-field data, assuming the mid-semispan position, $\eta=0.5$, as the base, the solid curve in Figure 9 was derived. Through a similar analysis the data points represented by symbols were derived as also shown in Figure 6. Hence, from three independent data sources, essentially the same spanwise trends were obtained for single carriage side force slope. The final curve presented in the handbook (Book 2 of Volume II) for this term is basically the average of the solid curve and the data points shown in Figure 9.

The next empirically derived correction to the initial prediction is the factor K_{INTF} . This term accounts for the interference effect of the fuselage on the captive store side force slope for high-wing aircraft. The presence of the fuselage near the installed store prevents the full development of a sidewash flow field and, therefore, modifies the spanwise trends established earlier.

The term $K_{L/C}$ is an empirical factor based on the length of the store divided by the local aircraft wing chord. In addition to the chordwise location of the captive store, this factor gives an indication of the amount of the store contained in the non-uniform wing flow field.

The next term K_Z , in the side force slope equation is a factor to account for pylon height variation. Sidewash angularity beneath

a swept wing is strongest near the wing surface and decays to zero at some distance, on the order of a local wing chord length, beneath the wing. Experimental flow field data indicate that the decay is exponentially shaped. Other investigators (Reference 4) have developed an empirical pylon height correction factor for side force slope which is presented in Figure 10 as a function of vertical distance beneath the wing surface to the store longitudinal axis. Figure 10 presents the pylon height correction factor for side force slope developed from the present study for comparative purposes and is presented as a function of vertical displacement from the wing lower surface to the pylon rack mid-lug point. The exponential variation with pylon height is apparent in both cases.

The final empirical factor, K_{Λ_1} , is a first-order correction for aircraft wing sweep angle. The factor is defined as $\sin \Lambda / \sin \Lambda_{\text{BASE}}$ where Λ is the quarter chord sweep of the subject aircraft wing. The base sweep angle, Λ_{BASE} , for this factor is 45° since the initial prediction discussed in Subsection 4.1 was made for a base wing with 45° sweep angle. This factor has been suggested by several investigators including those of Reference 4 and is adequate for wing sweep angles that do not vary significantly from the base wing sweep (45°). For this reason the range of sweep angles for which the technique is recommended is limited to quarter chord sweep angles between 30 and 60 degrees.

The discussion in this section has been limited primarily to those empirical factors pertaining specifically to the single carriage, side force slope prediction for $M=0.5$. Inspection of the other equations given in Figure 8 shows the large number of other factors that were evaluated to complete the single carriage case at $M=0.5$. Because of the similarity in approaches used and the results produced for all factors, descriptions of the remaining terms are not discussed here since they are described in detail in the handbook (Volume II of this document).

$$\text{SIDE FORCE SLOPE: } \left(\frac{SF}{q}\right)_{\alpha}^{\text{PRED}} = K_{C_{SF}} \left(\frac{SF}{q}\right)_{\psi_{ISO}} K_{\eta} K_{INTF} K_{\frac{L}{C}} K_{Z} K_{\Lambda_1}$$

$$\begin{aligned} \text{SIDE FORCE INTERCEPT: } \left(\frac{SF}{q}\right)_{\alpha=0}^{\text{PRED}} &= [(K_{SLOPE_1} + \Delta K_{SLOPE_{INTF}} + \Delta K_{SLOPE_{LE}}) \\ &\quad \cdot (\text{ADJ. FIN SPA}) + K_{INTC_1} + \Delta K_{INTC_{INTF}} \\ &\quad + K_{INTC_{LE}}] K_{\Lambda_1} S_{REF} \end{aligned}$$

$$\begin{aligned} \text{YAWING MOMENT SLOPE: } \left(\frac{YM}{q}\right)_{\alpha}^{\text{PRED}} &= K_{C_{YM}} \left(\frac{SF}{q}\right)_{\psi_{ISO}} K_{\Lambda_1} + [K_{SLOPE_1} (C_{LOCAL} K_{\Lambda_1}) \\ &\quad + K_{INTC_1} + \Delta K_{INTC_{INTF}}] K_{\Lambda_1} S_{REF}^d \end{aligned}$$

$$\begin{aligned} \text{YAWING MOMENT INTERCEPT: } \left(\frac{YM}{q}\right)_{\alpha=0} &= [(K_{SLOPE_1} + \Delta K_{SLOPE_{INTF}}) K_{\Lambda_1} + K_{INTC_1} \\ &\quad + \Delta K_{INTC_{INTF}}] K_{\Lambda_1} \end{aligned}$$

$$\text{ROLLING MOMENT SLOPE: } \left(\frac{RM}{q}\right)_{\alpha}^{\text{PRED}} = (K_{SLOPE_1} + \Delta K_{SLOPE_{INTF}}) (\text{FIN AREA}) K_{\Lambda_1}$$

$$\text{ROLLING MOMENT SLOPE: } \left(\frac{RM}{q}\right)_{\alpha=0} = K_{SLOPE_1} (\text{FIN AREA}) K_{\eta}$$

Figure 8. Example of Prediction Equations.
(Single Carriage Stores at M=0.5)

$$\text{NORMAL FORCE SLOPE: } \left(\frac{NF}{q} \right)_{\alpha}^{\text{PRED}} = K_{\Lambda_2} K_{C_{NF}} \left(\frac{NF}{q} \right)_{\alpha}^{\text{ISO}} - \left(\frac{NF}{q} \right)_{\alpha}^{\text{BUOY}}$$

$$\begin{aligned} \text{NORMAL FORCE INTERCEPT: } \left(\frac{NF}{q} \right)_{\alpha=0}^{\text{PRED}} &= (K_{\text{SLOPE}_1} \ell_{LE} K_{\Lambda_2} + K_{\text{INTC}_1} \\ &+ \frac{\Delta K_{\text{INTC}_2}}{K_{\Lambda_2}} + K_{x/c} \Delta K_{\text{INT}_{x/c}}) S_{\text{REF}} \end{aligned}$$

$$\text{PITCHING MOMENT SLOPE: } \left(\frac{PM}{q} \right)_{\alpha}^{\text{PRED}} = K_{\Lambda_2} K_{C_{PM}} \left(\frac{NF}{q} \right)_{\alpha}^{\text{ISO}} + \left(\frac{PM}{q} \right)_{\alpha}^{\text{BUOY}}$$

$$\text{PITCHING MOMENT INTERCEPT: } \left(\frac{PM}{q} \right)_{\alpha=0}^{\text{PRED}} = (K_{\text{SLOPE}_1} \ell_{LE} + K_{\text{INTC}_1}) S_{\text{REF}}$$

$$\text{AXIAL FORCE SLOPE: } \left(\frac{AF}{q} \right)_{\alpha}^{\text{PRED}} = \left[\left(\frac{AF}{q S_{\text{REF}}} \right)_{\alpha}^{\text{INST}} + \Delta \left(\frac{AF}{q S_{\text{REF}}} \right)_{\alpha}^{\eta} + \Delta \left(\frac{AF}{q S_{\text{REF}}} \right)_{\alpha}^{\text{INTF}} \right] S_{\text{REF}}$$

$$\begin{aligned} \text{AXIAL FORCE INTERCEPT: } \left(\frac{AF}{q} \right)_{\alpha=0}^{\text{PRED}} &= \left[\left(\frac{AF}{q S_{\text{REF}}} \right)_{\alpha=0}^{\text{ISO}} + \Delta \left(\frac{AF}{q S_{\text{REF}}} \right)_{\alpha=0}^{\text{INTF}} \right] \\ &\cdot (L + K_{\eta} + K_{\text{INTF}}) S_{\text{REF}} \end{aligned}$$

Figure 8. Example of Prediction Equations
(Single Carriage Stores at M=0.5) (Concluded)

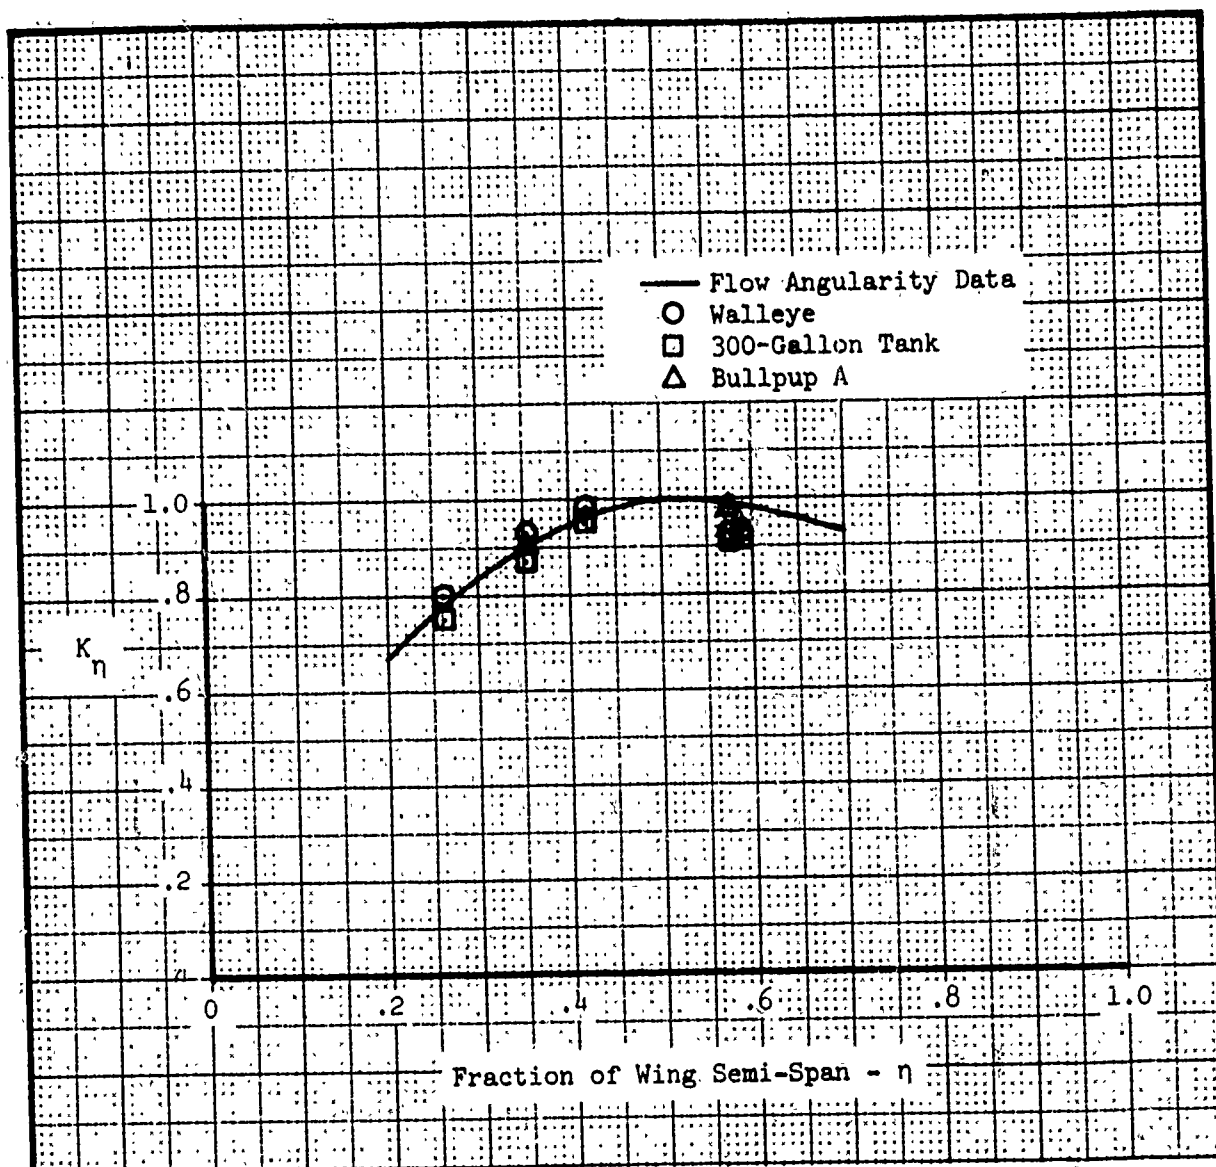


Figure 9. Derivation of Side Force Slope Spanwise Correction

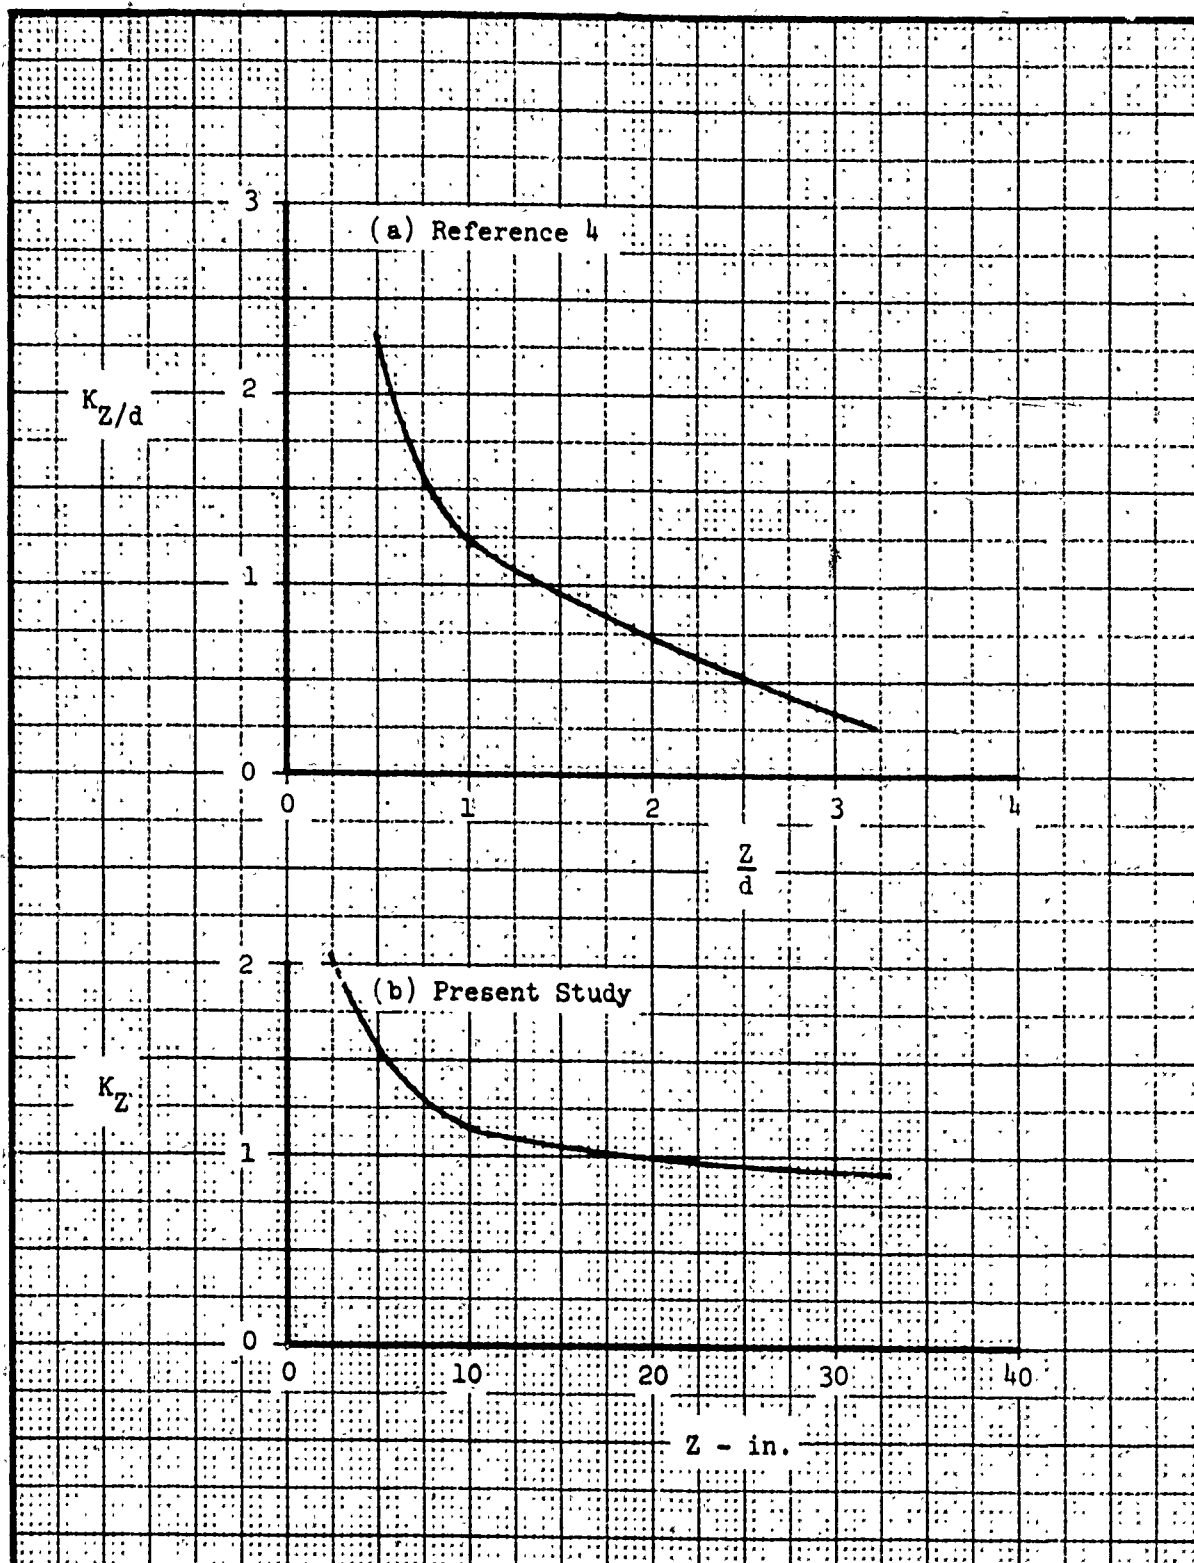


Figure 10. Comparison of Pylon Height Correction Factors.

h.3 MACH NUMBER EFFECTS

Extension of the $M=0.5$ prediction to other Mach numbers is accomplished by predicting the incremental slope and intercept corrections to account for Mach number differences. This concept is illustrated for side force slope by the following expression,

$$\left(\frac{SF}{q}\right)_{\alpha}^{M=x} = \left(\frac{SF}{q}\right)_{\alpha}^{PRED} + \Delta\left(\frac{SF}{q}\right)_{\alpha}^{M=x}$$

where:

$$\left(\frac{SF}{q}\right)_{\alpha}^{PRED} \quad - \text{Side force slope predicted at } M=0.5$$

$$\Delta\left(\frac{SF}{q}\right)_{\alpha}^{M=x} \quad - \text{Increment in side force slope at } M=x.$$

There is sufficient similarity in the variation of these corrections with Mach number to use a common approach in accounting for these effects. A generalized curve depicting the side force slope variation with Mach number is given by Figure 11.

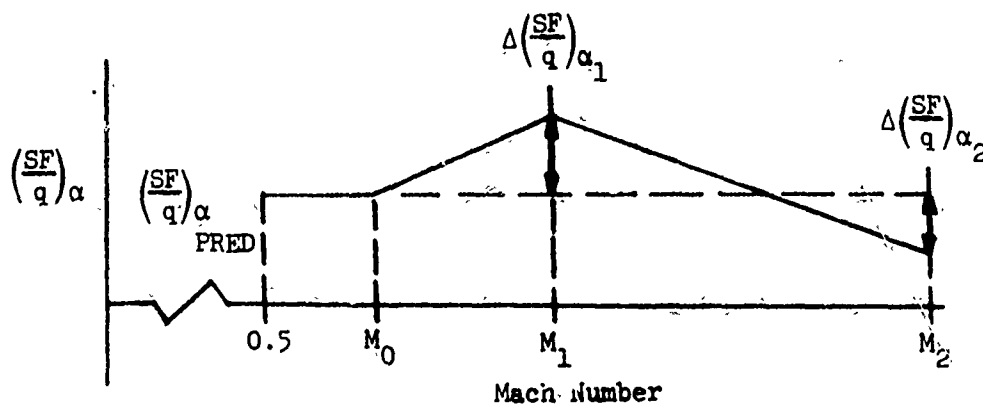


Figure 11. Side Force Slope - Generalized Mach Number Variation

The slope variation with Mach number was approximated by a series of linear segments with break points occurring at Mach numbers defined by M_0 , M_1 , and M_2 . The variation of the Mach break points were correlated as a function of local aircraft wing chord as shown in Figure 12 for the generalized case. M_0 , shown in Figure 11, is the Mach number where the slope initially deviated from the slope predicted at $M=0.5$. Equations were then developed to predict the incremental slope change from that predicted at $M=0.5$ for each of the remaining Mach break points (M_1 , M_2 , etc.). These equations were developed by correlating the increment obtained for configurations in the data base using various combinations of parameters. The combinations of parameters that correlated the increments often would vary in different portions of the Mach number range of interest, i.e., the parameters that correlated the increments in the subsonic flow regime often did not work in the transonic or supersonic regions. However, this was not surprising due to the vastly different flow fields experienced by the store in these Mach regimes.

An example of the resulting Mach number variation using linear segments is illustrated for a Walleye carried on the A-7 outboard pylon in Figure 13.

Corrections determined for each Mach break to predict the incremental slope or intercept changes apply only at the specific Mach number break determined from a figure similar to Figure 12. At Mach numbers between these specific break points, linear interpolation is used to calculate the increment at the desired Mach number.

The approach discussed here was used to predict the Mach number trends for most airload components for both single and multiple carriage configurations. However, a few exceptions occurred where this approach failed to correlate the Mach number variations. Where these cases occurred, the airload variation was plotted as a function of aircraft/store geometric parameters for the constant Mach numbers tested in the wind tunnel program; therefore, linear interpolation should be used between the Mach numbers discretely presented.

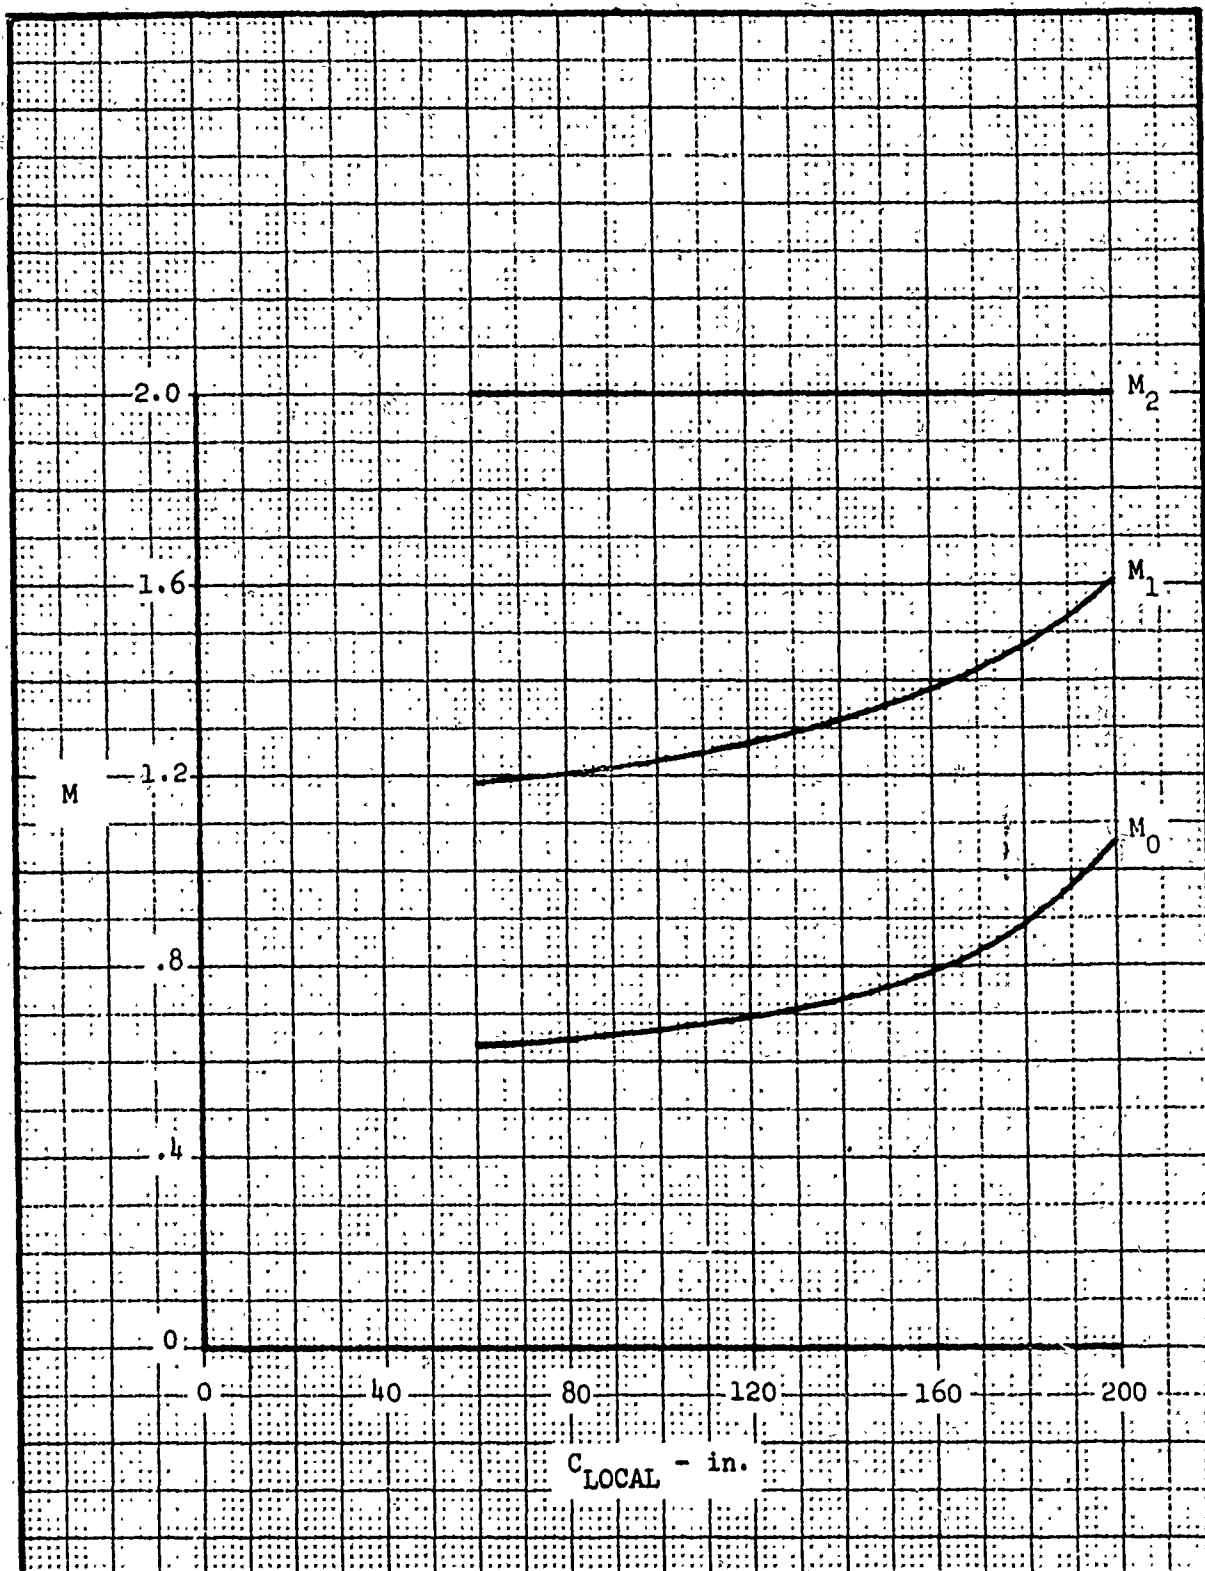


Figure 12. Generalized Mach Number Break Points

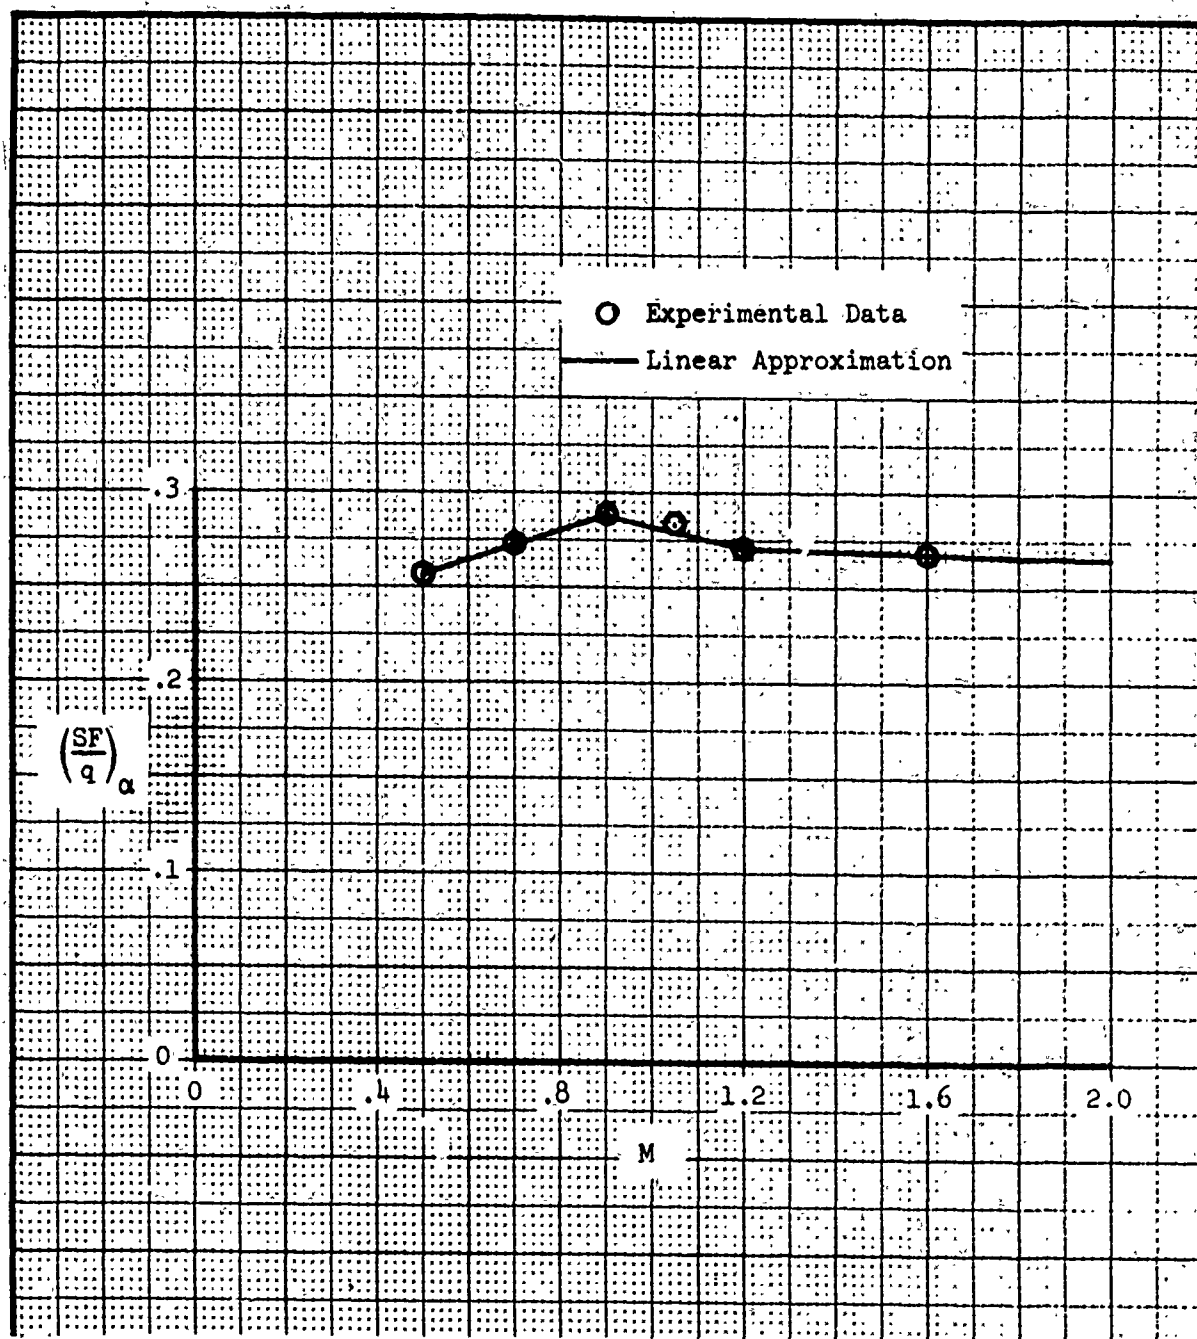


Figure 13. Side Force Slope Mach Number Variation - Walleye on A-7 Outboard Pylon

SECTION V

ASSESSMENT OF APPLICABILITY AND ACCURACY
OF THE PREDICTION METHOD

In undertaking this research program, there was some question regarding the degree of success that could be expected from a data correlation approach to developing a store airloads prediction technique. Experience in developing other empirical methods gave reasonable assurance that a method was possible. However, the goal for this program was a method that was easy to use and would provide sufficient accuracies to make the predictions suitable for preliminary design purposes. The results indicate that this goal was achieved. One of the important factors influencing these results was the quantity and quality of data used in the correlation. Because of the limited data obtained in the survey, the wind tunnel data produced as part of the program made possible the versatility which was accomplished.

Simplicity was achieved in the sense that there are no complicated steps required to apply the method. There are many factors to be evaluated, but the process is outlined in a systematic sequence of simple steps. Because there are numerous calculations required for a complete prediction of six component airloads for multiple store installations, computerization of the method for practical applications appears appropriate.

The method has a wide range of applications and capabilities. The method is capable of predicting the captive airloads for single carriage and multiple carriage store configurations for a generalized aircraft including the basic airload (that airload generated by a zero-yaw pitch excursion of the parent aircraft) and the incremental airloads due to aircraft yaw and adjacent store interference. Establishing absolute limits of applicability is difficult since this is often a function of the accuracy that is acceptable. Recommended limits are submitted and sufficient data are presented to implement the method for those limits. Applications beyond the stated limits will normally mean a decay in accuracy.

The single carriage method is valid over the Mach number range from 0.5 to 2.0 while the multiple carriage Mach number range varies from 0.5 to 1.6. Both single and multiple carriage prediction techniques are valid over the angle of attack range of -4 to $+12$ degrees and the aircraft yaw angle range of -8 to $+8$ degrees although best accuracy for the increments due to aircraft yaw are for the range -4 to $+4$ degrees. The aircraft wing sweep angle (quarter chord) range of validity is from 30 to 60 degrees although the method can be applied to a wider sweep angle range (say, 20 to 70 degrees) with decreased accuracy. The method is applicable to all wing/pylon and fuselage centerline carriage configurations. It is not intended for fuselage configurations off the centerline nor to semi-submerged or conformal carriage.

An assessment of the accuracy of the method has been conducted through comparisons with the data base used in the technique development. The first accuracy check, and possibly the most meaningful, was a comparison of predicted values of individual airload components with the linearized representation of the data obtained from the test of that configuration in the wind tunnel. This check is meaningful because accurate linearized representations, like those shown in Figures 5 and 6, are adequate for most engineering applications. Wind tunnel tests for airloads data can often be avoided if this type prediction has sufficient accuracy. The accuracy comparisons with the linearized data base indicate that all components for both single and multiple carriage configurations are nominally within ± 10 percent of base value.

Additional comparisons were made to check predicted values with specific data points. This check includes the effects of scatter in the wind tunnel data which is not necessarily a true test of the method. However, it does indicate something of the data non-linearity effects on accuracy. Comparisons with the experimental data base, accounting for these existing nonlinearities, are summarized in Table 1.

TABLE 1. SUMMARY OF NOMINAL METHOD ACCURACIES

Airload Component	Nominal Accuracy(%)		α Range, Degrees for Best Accuracy	
	Single	Multiple	Single	Multiple
Side Force	± 15	± 15	0/10	-4/8
Yawing Moment	± 20	± 20	-4/6*	-4/8
Normal Force	± 15	± 15	0/10	-4/8
Pitching Moment	± 20	± 20	-4/12	-4/8
Rolling Moment	± 15	± 10	-4/12	-4/12
Axial Force	± 10	± 10	-4/12	-4/12

* -4/8 degrees if $L/C \leq .8$, L is store length, and C is the local wing chord.

REFERENCES

1. Hill, D. W. Jr., and Mattasits, G. R., "Aerodynamic Loads on Four External Stores in the Carriage Position on the A-7D and F-4C Aircraft at Mach Numbers from 0.5 to 2.0, "AEDC-TR-74-29, AFATL-TR-74-64, Arnold Engineering Development Center, May 1974.
2. Gregoire, J. E., "Wind Tunnel Tests on the 7.5% F-4C Store Loads Model in the McDonnell Polysonic Wind Tunnel, Series II," Report A879, McDonnell Aircraft Corporation, January 1965.
3. Alford, W. J. Jr., "Theoretical and Experimental Investigation of the Subsonic Flow Fields Beneath Swept and Unswept Wings with Tables of Vortex - Induced Velocities," NACA Report 1327, 1957.
4. Marsden, P. and Haines, A. B., "Aerodynamic Loads on External Stores: A Review of Experimental Data and Method of Prediction," R. & M. No. 3503, November 1962.

APPENDIX A

AIRCRAFT-EXTERNAL STORE DATA INDEX AND BIBLIOGRAPHY

TABLE A-1 GUIDE TO AIRCRAFT-STORE DATA INDEXES.

Table		Page
A-2	A-4 Aircraft-Store Data Index	43
A-3	A-6 Aircraft-Store Data Index	45
A-4	A-7 Aircraft-Store Data Index	46
A-5	F-4 Aircraft-Store Data Index	51
A-6	F-5 Aircraft-Store Data Index	61
A-7	F-8 Aircraft-Store Data Index	62
A-8	F-14 Aircraft-Store Data Index	63
A-9	F-86 Aircraft-Store Data Index	64
A-10	F-105 Aircraft-Store Data Index	65
A-11	F-111 Aircraft-Store Data Index	67
A-12	Miscellaneous Air Force Aircraft-Store Data Index (A-37, F-100, F-101, F-104, F-106, F-107)	72
A-13	Miscellaneous Navy Aircraft-Store Data Index (F2H, F3D, F3H, F4D, F5D, F7U, F9F, F10F)	74
A-14	Miscellaneous Aircraft-Store Data Index	76
A-15	Wing-Stores (without Fuselage) Data Index	88
A-16	General Reports - Store Data Index (Bibliographies, Prediction Methods, etc.)	89
A-17	Isolated Stores, Racks, and Pylons Data Index	94

Symbol Notation:

A - Aircraft with Installed Stores

P - Pylon

R - Rack

S - Store

X - Applicable

TABLE A-2. A-4 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-Fuselage position, wing sweep - deg.)		STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE				STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA				AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS				
			FUSELAGE	WING	PYLON	TANGENT	SEMI- SPRUEDED	CONFORMAL	WING-TIP	TEP	SIMPLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIZE	YAW	ROLL	WIND TURNED	INFLIGHT	THEORETICAL		
A-4 (IM, 41)		MK-81 SELD, LAU-10/A, MK-77, MK-79, 150 and 300 Cal. Tanks	X	X						X	X		X	X	X	A	A					X			15	Includes A-7 and MIDS III comparison data.
A-4C (IM, 41)		MK-83		X							X		X	X		S	S	S	S	S			X		45	Includes theoretical prediction method.
A-4D (IM, 41)		MK-81 and -82 LDGP, 150 and 300-Cal. Tanks, Bullpup A, LAU-10, ARM		X	X					X	X		X	X	X	A	A	A				X			47	
A-4 (IM, 41)		Walleys		X	X						X		X	X		A	A	A				X			58	Includes A-7A and F-8 comparison data.
A-4 (IM, 41)		MK-82 LDGP		X	X						X		X	X		A						X			60	Includes MIDS III comparison data.
A-4 (IM, 41)		MK 7 Dispenser (Rockeye II)		X	X					X	X	Aero 20A	X			S	S	S	S	S			X		139	
A-4/F, C (IM, 41)		All compatible aircraft stores		X	X					X	X		X	X		X	X	X	X	X	X	X	X		180	Defines store drag index system.
A-4/TA-4 (IM, 41)		Various stores	X	X	X						X		X			PS, S	PS, S	PS, S	PS, S	PS, S			X		187	
(A4D-2, -2M) (IM, 41)		Various stores	X	X	X						X		X			S	S	S	S	S		X			188	
(A4D-2) (IM, 41)		Single: MK-81, MK-82, MK-83, 150-, 300- and 400- Cal. Tank, refueling store, Bullpup A, MK-28 TER: MK-81 SE, MK-82 SE, MER: MK-81 SE, MK-82 SE	X	X	X					X	X	Aero 5A-1	X	X		A						X			190	
A-4M (IM, 41)		Single: MK-81, MK-82, MK-83, 150-, 300- and 400- Cal. Tank, Refueling Store, Bullpup A, MK-28 TER: MK-81SE, MK-82SE MER: MK-81SE, MK-82SE	X	X	X					X	X		X	X		A									192	

TABLE A-2. A-4 AIRCRAFT-STORE DATA INDEX (Concluded)

AIRCRAFT (Wing-Fuselage position, wing type - den.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE BACK TYPE			MACH RANGE			STORE, RACK, Pylon, and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TARGET	SR-1 SURVEILLANCE	CONFORMAL	WING-TIP	REF	TEP	CIVILE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	ROLL	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
A-4E (1A, 41)	Walleye	X	X	X						X								(SEE REMARKS)							344	Weapon position drawings for A-4E.
A-4E (1A, 41)	Walleye (MK 1 MOD 0)		X	X						X		X					S	S	S	S				X	346	
A-4C	Aircraft-Missile Interf. Effects Vehicle (Missile shape w/ hour glass)			X						X		X											X		417	Pressure data
TA-4E (1A, 41)	M-81, Bullpup-A		X	X					X	X		X	X			A	A	A	A	A	A	X			485	
A-4F	Two Conformal Carriage Systems, MK-82	X	X	X			X		X			X	X									X			520	
A-4	Rockeye II								X	X								S				X			569	

TABLE A-3. A-6 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE BACK TYPE			MACH RANGE			STORE, BACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TARGET	SHIM- SUBMERGED	CONFORMAL	WING-TIP	NER	TR	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	WIND TUNNEL	THEORETICAL		
A-6A (HW, 30)	(See remarks)		X										X									X			33	Flow field data beneath A-6A wing.
EA-6B (HW, 30)	TJ pod, 300-gal. tank	X	X								X		X	X								X			71	
A-6A (HW, 30)	MK-82, VASM-N-7 (Bullpup)	X	X	X							X		X									X			186	Data are for limit load conditions.
A-6A (HW, 30)	Walleye	X	X								X														344	Weapon position drawings for A-6A.
A-6A (HW, 30)	Walleye (MK 1 Mod 0)	X	X	X							X		X												346	Includes data comparisons between A-7A, A-6A, A-1E and NASA model.
A-6A (HW, 30)	MK-81, 300-gal. tank, AERO 7D, AERO 10D, AERO 5A, MK-28, V-X-91 Bomb	X	X	X							X		X	X								X			347	
A-6A (HW, 30)	MK-81 and MK-82 GP/SF Bombs, MK-83, MK-84, 300- gal. tank, LAU-10 A/A, MK-28, Buddy Tank	X	X	X					X		X/A/A-37B		X	X								X			350	
A-6A, EA-6B (HW, 30)	300-Gal. Tanks	X	X	X							X		X	X											356	

TABLE A-4. A-7 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE				MACH RANGE		STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TAVERT	SEMI- SUBTENDED	CONFORMAL	WING-TIP	NER	TOP	CIRCLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
A-7A (NW, 41)	Sidewinder, MK-81, MK-82, ML17, Walleye, Walleye, Aero ID	X	X	X					X		X	LAU-7A	X	X		A	A					X			25	
A-7 (NW, 41)	MK-81 and 82 SELD, MK-79, MK-77, LAU-10/A, 150- and 300-Cal. Tanks		X	X					X	X	X		X	X		A						X			35	Includes comparison A-4 and MIDS III data.
A-7A (NW, 41)	Walleye		X	X							X		X	X		A						X			57	Effects of boat tails.
A-7A (NW, 41)	Walleye		X	X							X		X	X		A	A					X			58	Includes A-4 and F-8 comparison data.
A-7D (NW, 41)	MK-81 and MK-82 SELD, ML17A1		X	X					X	X	X		X	X		A	A					X			137	
A-7 (NW, 41)	(See remarks)	X	X	X					X	X	X	X	X	X		X	X	X	X	X	X	X	X	X	166	Bibliography of A-7 aircraft-store carriage and separation reports.
A-7B (NW, 41)	Single: MK-80 series, Aero ID, Walleye, Bullup B, ML17, LAU-3/A, LAU- 10/A, AIM-9B (Sidewinder), SUU-23/A, Rocket II, CEU-1A/A Multiple: MK-81, MK-82, ML17, LAU-3A/A, LAU-10/A, MK-83, CEU-1A/A, Rocket II	X	X	X					X	X	X		X	X		A	A	A				X	X	X	167	
A-7E (NW, 41)	Single: 150-, 300-, 100-, and 450-lb. Tanks, MK-28, MK-81, MK-82, MK-83, MK-84, MK-79, Aero 19A, Mines, AN/AUQ series, Walleye, Bullup A and B, etc. Multiple: MK-80 series, CEU-1, LAU-3A/A, LAU-10A, LAU-32A/A, MK-117, MK-15, MK-20, etc.	X	X	X					X	X	X		X	X		A, PS, PS	A, PS, PS					X	X	X	169	
A-7D (NW, 41)	ML17, AIM-9B (Sidewinder)	X	X	X					Y		X	LAU-7A/A (AIM-9B)	X	X		PS, PS, PS	PS, PS, PS	PS, PS, PS	PS, PS, PS	PS, PS, PS	PS, PS, PS	X	X	X	170	

TABLE A-4. A-7 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE BACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE				DATA REFERENCE	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI-SUBMERGED	CONFORMAL	WING-TIP	HER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFIGHT	THEORETICAL			
A-7A (HW, 47)	Most compatible stores	X	X	X					X	X	X							(SEE REMARKS)							337	Describes store installation geometry	
A-7 (HW, 47)	Walleye, Large Scale Walleye, Maverick (AGM-65A)	X	X	X						X		X				X	X	X	X	X					343		
A-7A (HW, 47)	Walleye	X	X	X						X								(SEE REMARKS)							345	Weapon position drawings on A-7A.	
A-7A (HW, 47)	Walleye (MK 1 Mod 0)	X	X	X						X		X		X		S	S	S	S	S	X				346	Include data comparisons between A-7A, A-6A, A-1E and NASA model.	
A-7 (HW, 47)	ML17, AFATL Parametric Shapes	X	X	X					X	X	X		X			A	A	A	A	A	X				371		
A-7D (HW, 47)	Maverick (AGM-65A)	X	X	X								AGM-65A	X	X		PRS S	S	PRS	PRS	PRS	X				390	See reference 28 for data.	
A-7D (HW, 47)	Maverick (AGM-65A)	X	X	X								AGM-65A	X	X		PRS S	S	PRS	PRS	PRS	X				397		
A-7E (HW, 47)	Maverick (AGM-65A)	X	X	X								AGM-65A	X	X		PRS S	S	PRS	PRS	PRS	X				398		
A-7 (HW, 47)	300-Gal Tank, MK-81, MK-82, ML17, MK-84	X	X	X					X	X			X	X		A	A					X			399		
A-7 (HW, 47)	ML17, ML18, BLU-1C/B, Sidevinder, Pylons	X	X	X					X	X	X		X	X		A	A	A	A	A	X				402		
A-7 (HW, 47)	ML17, MK-82, LAU-2/A, CBU-46/A, BLU-1/C, MK-84, ML18, 300-Gal Tank, Sidevinder	X	X	X					X	X	X		X			A	A	A	A	A	X				403		
A-7D (HW, 47)	ML17, MK-82, 300-Gal Tank, Walleye, BLU-1C/B, LAU-2/A, CBU-46/A	X	X	X					X	X	X		X	X		A	A	A	A	A	X				405		
A-7D (HW, 41)	All compatible store types	X	X	X					X	X	X		X			A	A					X	X	X	250		

TABLE A-4. A-7 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TARRANT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	TEB	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAW	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
A-7A (HW, 41)	Single: Buddy Tank, MK-28, MK-43, MK-84, 150-, 300-, 400- and 450-cal. Tanks, IAU-10A, MK-57, MK-4, Ballpup A and B, etc. Multiple: MK-81, MK-82, MK-83		X	X				X	X	X		X	X		A	A	A				X	X	X	171	
A-7B (HW, 41)	Single: 150-, 300-, 400-, and 450-cal. Tanks, MK-50 series, MK-28, MK-43, MK-57, MK-79, MINES, etc. Multiple: MK-81, MK-82, CBU-1, MK-15, MK-20, 1217, LAU-10A, LAU-3A/A, LAU-32A/A, etc.	X	X	X				X	X	X	LAU-7A/A (AIM-9B)	X	X		A	A	A				X	X	X	172	
A-7D (HW, 41)	CBU-46/A, LAU-7/A, BLU-27		X	X					X	X		X				X	X				X			461	
A-7D (HW, 41)	M17, Various Parametric Shapes		X	X				X	X	X			X		X	X	X				X			428	
A-7D (HW, 41)	MK-81SE, LAU-7A	X	X	X					X	X		X	X		X							X		434	

TABLE A-4. A-7 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACE TYPE				STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA			AIRLOADS DATA TYPE				DATA REFERENCE NUMBER	REMARKS					
		FUSELAGE	WING	PYLON	TANGENT	SPIN- SUPERFORD	CONFORMAL	WING-TIP	FEB	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE			YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL
A-7D (HW, 41)	MK-82SE, SUU-13, M17R	X	X	X					X		VER	X	X	X								X			480	Separation Data
A-7D (HW, 41)	MK-82CP, MK-82SE, CBU-24/B, M17GP		X	X					X			X	X	X								X			493	Separation Data
A-7D (HW, 41)	BLU-1C/B, M17GP MK-82CP, MK-82SE		X	X					X	X	X	X	X	X		S	S	S	S	S	X				495	
A-7D (HW, 41)	Most Compatible Stores	X	X	X					X	X	X					(SEE REMARKS)									497	Describes Store Installation Geometry
A-7D (HW, 41)	MK-82CP, MK-82SE, M17, BLU-1/B, SUU-42/A, CBU-24B/B		X	X					X	X	X		X	X											502	Separation Data
A-7D (HW, 41)	SUU-25C/A, CBU-52B/B, MK-20, BLU-52A/B, 300- Gal. Tank		X	X					X	X	X		X	X							X				513	Separation Data
A-7D (HW, 41)	MK-84/CB, MK-84BOCB, MK-82/CB, BLU-1/B, LAU-68A/A		X	X					X		X		X	X							X				517	Separation Data
A-7A (HW, 41)	Two Conformal Carriage Systems, MK-82		X				X		X				X	X	A						X				520	
A-7D (HW, 41)	SUU-25/A, CBU-12A/A, CBU-46/A, LAU-3/A, LAU-68A/A, CBU-30/A		X	X						X	X		X	X							X				538	Separation Data
A-7D (HW, 41)	M17R, BLU-1C/B, SUU-42/A		X	X					X	X	X		X	X							X				541	Separation Data

TABLE A-4. A-7 AIRCRAFT-STORE DATA INDEX (Concluded)

AIRCRAFT (Wing-fuselage position, - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS	
		FUSELAGE	WING	PYLON	TANDEM	SEMI- SUBMERGED	CONFORMAL	WING-TIP	NER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAW	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT			THEORETICAL
A-7D (HW, H1)	CRU-24B/B, CRU-30/A, CRU-38/A, CRU-42/A, BUU-1C/B, N117R	X	X	X						X		X	X								X				542	Separation Data
A-7 (HW, H1)	MK-82 LDGP		X	X						X			X					X		X					560	
A-7 (HW, H1)	MK-82		X	X					X	X	X		X	X			A						X		574	Mostly Performance Data
A-7D (HW, H1)	MK-82		X	X					X	X	X		X				A						X	X	582	Comparison of Theory & Flight Test Drag Prediction
A-7D	300-Gal. Tank, N117P and BUU-1C/B Bombs, AGM-62/A Walleye	X	X	X					X		X		X	X	X						X				586	
A-7D	BUU-1C/B, MK-82, 200-Gal. Tank, AGM-62/A Walleye, MK-84, MK-20, N117/131, XOU-353, XOU-351	X	X	X					X	X			X	X	X		A	A	A	A	A	X			596	

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE				MACH RANGE		STORE, RACK, Pylon and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS	
		FUSELAGE	WING	PYLON	TANGENT	SPIN- SURFACED	CONFORMAL	WING-TIP	MER	TER	SIMPLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL			
F-4C (1M, 51)	MMU-108		X	X					X	X		STER, SMER	X	X	X	A	A	A				X			31		
F-4H-1 (1M, 51)	Store (various scales)	X	X	X						X			X	X	X	A							X		50		
F-4H-2 (1M, 51)	Conformal (four shapes)	X					X						X	X	X	A						X			62		
F/RP-4C (1M, 51)	BUU-1/B, M117, G.P., SUU-16/A, 370- and 600-Gal. Tanks		X	X					X					X		A								X	68		
F-4C (1M, 51)	CMU-24 Dispenser		X	X					X					X	X	S						X			72	Includes captive trajectory data.	
F-4 (1M, 51)	SUU-46/	X	X	X						X	SUU-46/A			X	X	A	A	A	A	A		X		X	73		
F-4C (1M, 51)	Hard Structures Munition		X	X										X	X	S	S	S	S	S	S	X			77	Flow field survey with instrumented store beneath F-4C.	
F-4C (1M, 51)	M117 LDGP		X	X										X	X		S	S				X			79	Includes flow field velocity vector plots and captive store airloads.	
F-4B (1M, 51)	MC-81, -82 and -83 LDGP, LAU-10/A, Sparrow III, 370- and 600-Gal. Tank	X	X						X	X				X		A							X		95	Qualitative drag index values for 16 assorted loadings.	
F-4J (MOD-MOD) (1M, 51)	Sparrow, Sidewinder (AIM-9B/D), 370- and 600-Gal. Tanks		X	X						X	Pylons, LAU-7/A			X	X	S, A	A					X			97		
F-4 (MOD) (1M, 51)	Sparrow, Sidewinder (AIM-9B/D), 370- and 600-Gal. Tanks		X	X						X	Pylons, LAU-7/A			X	X	S, A	A					X			98		
F-4E (1M, 51)	Single: Concept A, Concept X, SUU-46, 370- and 600-Gal. Tank, M117, Glove Pod.		X	X										X	X	A	A	A	A			X			99		
F-4Q (1M, 51)	TER and MER: MC-82 SE		X	X						X				X	X		A	A	A				X			104	
F-4Q (1M, 51)	AFS-107, 669A, QRC-249		X	X										X	X		S	S	S	S	S	X			104		
F-4F (1M, 51)	370 Cal. Tank, M117, LAU-3/A, BUU-27/B, Sparrow, AIM-4	X	X	X					X	X				X	X			A					X		140		

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuelage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE							MACH RANGE	STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE	REMARKS
		STORE MOUNTING LOCATION							CARRIAGE RACK TYPE								STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE				
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	NER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC		DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL			
F-4C, D, E (1W, 51)	Most aircraft stores	X	X	X					X	X	X	X	X	X	X	X	X	X				X	X		149	Aircraft performance data manual. Describes drag and stability index systems.		
F-4E (1W, 51)	Sparrow, M117, LAU-3/A 370-Gal. Tank, BUU-27B, AIM-4	X	X	X					X	X	X	X	X	X	X	X	X	A	A			X			152	Includes Stability Index Number Data.		
F-4E (1W, 51)	MK-82 LDGP, MK-84, LAU- 3/A, 370-Gal. Tank, M117,		X	X					X	X	X	X	X	X	X	X	X	X				X	X		153	Defines buffet/stall onset w/wo stores.		
F-4E (1W, 51)	ADM-7, 370-Gal. Tank, M117, LAU-3/A	X	X	X					X	X	X	X	X	X	A	A						X			154			
F-4C (1W, 51)	Most aircraft stores	X	X	X	X				X	X	X	X	X	X	X	A						X	X	X	174			
F-4B (1W, 51)	MK-4 Gun pod, Bullpup A, MK-82, MK-83, Aero 7D, Aero 10D, Shrike, ALQ-81, ALQ-88	X	X	X					X	X	X	X	X	X	RS S	RS S	RS S	RS S	RS S	RS S		X	X	X	185	Inflight data are limit load conditions.		
F-4E (1W, 51)	ADM-7D/E	X			X	X				X				X	X	A	A					X			189			
F-4C (1W, 51)	M117, BUU-1	X	X	X					X	X	X	X	X	X	X		S	S	S	S	S	X			173	Includes captive store trajectory data.		
F-4 (1W, 51)	Sparrow, MK-84LD, fuel tanks	X	X	X	X					X					X	A, S, E, A	S, A, S, A	A			X			197	Includes captive launch trajectory data and schlieren photographs.			
F-4C (1W, 51)	CBU-33/A store	X	X	X					X	X	X	X	X	X	X	S	S	S	S	S	S	X			315	Includes captive launch trajectory data.		
F-4 (1W, 51)	SUU-25B/A flare pod	X	X	X					X	X	X	X	X	X	X	S	S	S	S	S	S	X			316	Includes captive launch trajectory data.		
F-4C (1W, 51)	SUU-25C/A flare pod	X	X	X					X					X	X	S	S	S	S	S	S	X			317	Includes captive launch trajectory data.		
F-4C (1W, 51)	M117 bomb		X	X						X				X	X	S	S	S	S	S	S	X			318	Includes captive launch trajectory data.		
F-4B/E (1W, 51)	BUU-1/B firebomb, SUU-13/A dispenser, 600-gal tank	X	X	X					X	X				X	X	S	S	S	S	S	S	X			319	Includes captive launch trajectory data.		

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuelage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION					CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE		DATA REFERENCE NUMBER	REMARKS		
		FUSELAGE	WING	PYLON	TANGENT	30°- SURFACED	CONFORMAL	WING-TIP	MR	TR	SINGLE	OTHER	SUBSONIC	TRANS-SONIC	SUPER-SONIC	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL			INFLIGHT	THEORETICAL
F-4B (IM, 51)	370-and 600-gal. fuel tank, MK-43, Sparrow III, Sidewinder	X	X	X	X					X	Dual Side- winder	X	X		A							X		342	
F-4 (IM, 51)	Large scale Walleye, Maverick (AGM-65A), AGM-76A (Phoenix)		X	X						X		X				S	S	S	S		X			343	
F-4D (IM, 51)	AIM-4, LAU-3, ML17, 370- gal. tank		X	X				X	X	X	AIM-4D launcher	X	X	X	A	A	A	A			X			354	
F-4K/M (IM, 51)	LAU-10A, LAU-3A, MK-83, MK-10, MK-21, 18 Tube launcher Store		X	X					X	X		X				S, PS, PRS	S, PS, PRS	S, PS, PRS	S, PS, PRS		X			355	
F-4 (IM, 51)	AIM-4-D, ML17, LAU-10/A, MK-57, MAU-12 Pylon		X	X				X	X	X	AIM-4D launcher	X	X	X		S, PS, PRS	S, PS, PRS	S, PS, PRS	S, PS, PRS		X			356	
F-4 (IM, 51)	669 A ECM, QRC-249, 669L ECM, AFS-107, Gun Pod		X	X				X		X		X	X	X		S, PS, PRS	S, PS, PRS	S, PS, PRS	S, PS, PRS		X			357	
F-4 (IM, 51)	TFD (SUU-42/A)		X	X				X	X	X		X	X	X		S, PS, PRS	S, PS, PRS	S, PS, PRS	S, PS, PRS		X			358	Also includes measured TFD fin airloads
F-4K (IM, 51)	AJ-168 (ARM and TVM), Equipment Pod	X	X	X						X	Launch Rail	X	X	X	A	A	A	A	A		X			359	
F-4M (IM, 51)	Reconnaissance Pod	X		X						X		X	X	X		S	S	S	S		X			360	
F-4 (IM, 51)	LAU-3/A, MK-93, LAU-10/A, ML17 GP	X	X	X							SMER, STER	X	X	X		S, PS, PRS	S, PS, PRS	S, PS, PRS	S, PS, PRS		X			361	Also includes measured outer wing panel bending moments
F-4K/M (IM, 51)	370-and 600-gal. fuel tank 540-and 1000-lb. bombs, 28 lb. Practice Bomb, 36 Tube Launcher, Lepus Flare	X	X	X					X	X		X	X	X	A	A	A	A	A		X			362	
F-4 (IM, 51)	ML17, TMU-166 AB-457-2, MK-20 Rocket II, BLU-34/B MK-82, MUJ, TTFM, SUU-13/A Red Flame II	X	X	X				X	X	X		X				S, PS, PRS	S, PS, PRS	S, PS, PRS	S, PS, PRS		X			363	
F-4 (IM, 51)		X		X						X		X	X	X		S	S	S	S		X			364	

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS		
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	WING	TER	SINGLE	OTHER	SUBSONIC	TRANS- SONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT			THEORETICAL	
F-4C (IM, 51)	AERO 7D, AERO 10D, Bullpup A and B, MUJ, MC-82 GP, MC-83 GP, M17, TX-61, MC-28, MC-43, MC-57, Gun Pod	X	X	X					X	X	X	Grumman Single Rack	X	X	X	X	X	S, PRS	S, PRS	S, PRS	S, PRS	S, PRS	X			365	Also includes measured outer wing panel bending moments
F-4D (IM, 51)	AERO 7D, MUJ-10B, 370-Gal. Tank, SUJ-13/A, MUJ-32B/99, MC-12, MC-84, Sparrow								X	X			X	X	X	A	A	A	A	A	A	X				366	
F-4 C/D (IM, 51)	Bullpup A, M17, SUU-13/A, MUJ-27/B, MUJ-32/B, M17R	X	X	X					X	X	X		X	X	X			S, PRS	S, PRS	S, PRS	S, PRS	S, PRS	X			367	
F-4D (IM, 51)	370-Gal. Tank, SUU-13/A, GUJ-39/40, TMJ-28/B, SUU-42	X	X	X					X	X	X		X	X	X	A	A	A	A	A	A	X				368	
F-4B (IM, 51)	Bullpup A, M17, MC-82, MC-83, Aero 7D, Aero 10D	X	X	X					X	X	X	Grumman Single & Multiple Unit Racks	X	X	X			S, PRS	S, PRS	S, PRS	S, PRS	S, PRS	X			369	
F-4 (IM, 51)	MC-82, M17, 370-Gal. Tank, APATL Parametric Shaper	X	X	X					X	X	X		X	X	X	A	A	A	A	A	A	X				371	
F-4D (IM, 51)	AGM-65A (Maverick), 370-Gal. Fuel Tank, Sparrow	X	X	X							X	AGM-65A Launcher	X	X	X	A	A	A	A	A	A	X				383	
F-4 (IM, 51)	AGM-65A (Maverick)		X	X								AGM-65A Launcher	X	X	X			PS, S	PS, S	PS, S	PS, S	PS, S	X			384	Also includes bending moment airloads on "T" launchers and interference effects of adjacent stores.
F-4C (IM, 51)	Sparrow III (6a and 6b), Sidewinder 1A and 1-C, GAM-83A, -83B, A/B 37B1, BUJ-1B, CRJ-1A & 2A, LAU-3/A, LAU-10/A, LAU-18A, M16A2, M17, M20E1, MC-11, MC-81, -82, -83, MUJ-10/B, MC 28 MOD 1 (EX and SE), MC-3 MOD 0 and MOD 1, MC 57, MU-1A, SUU-16A, QRC-160A-1(T) 2(T) 3(T)	X	X	X		X			X	X	X	LAU-7A Launcher	X	X	X			PS	PS	PS	PS	PS	X			391	

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TAPERED	SEMI- SURFACED	CONFORMAL	WING-TIP	HER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
F-4D (1M, 51)	Conformal Carriage with MK-82, NSRDC BLU-117 Weapons	X	X	X			X		X	X				X		X	X	X	X	X	X	X			467	
F-4D (1M, 51)	Conformal Carriage with MK-82	X	X	X			X		X	X					X	X	X	X	X	X	X	X			468	
F-4C/D (1M, 51)	SU-46/A	X		X							X			X	X	X	X	X	X	X	X	X			466	
F-4E (1M, 51)	M117, MK-82, 370-gal. Tank, Various Parametric Shapes		X	X						X	X			X		X	X	X							468	
F-4D (1M, 51)	370-Gal. Tank, Maverick & Various Missile Configuration	X	X	X							X	Roll Launch		X		X	X	X							431	
F-4C (1M, 51)	SU-51B/B		X	X						X			X	X		S	S	S				X			439	
F-4C (1M, 51)	SU-16/23A, BLU-52/B, M117, MK-82	X	X	X					X	X	X		X	X		S	S	S	S	S	S	X			442	Data obtained using CTS Test Rig.
F-4C (1M, 51)	SACM, HAST	X	X	X							X		X	X		S	S	S	S	S	S	X			445	
F-4C (1M, 51)	M117		X	X						X	X		X			S	S	S				X	X		450	
F-4E (1M, 51)	MK-82, 500-lb. Cylindrical Bombs	X	X	X				X	X		X		X	X	X	A	A	A				X			419	

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE		DATA REFERENCE NUMBER	REMARKS	
		FUSELAGE	WING	PYLON	TANTRANT	SPIN- SUBMERGED	CONFORMAL	WING-TIP	PER	TER	SIMPLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT			THEORETICAL
F-4C (IM, 51)	BIU-52 bomb	X	X	X									X	X			S	S	S	S	S	X			320	Includes captive launch trajectory data.
F-4 (IM, 51)	SUU-16/23A gun pod	X	X	X							X		X	X			S	S	S	S	S	X			321	Includes captive launch trajectory data.
F-4C (IM, 51)	ML17 bomb (mod)		X	X							X		X	X			S	S	S	S	S	X			322	Includes captive launch trajectory data.
F-4C (IM, 51)	SUU-25B/A flare pod		X	X									X	X			S	S	S	S	S	X			314	Includes captive launch trajectory data.
F-4C (IM, 51)	BIU-1/B, CHU-1/A and 2/A, IAU-3A, IAU-10A, IAU-18A, ML16-42, ML17, ML29-EL, MC-1, MC81, -82, -83, MU-10/B, AGM-12B, -12C, -15A, Sidewinder 1A and 1C Walleye, MC28EX, MC28RE, MC43 MOD 0, MOD 1, MC 57, TG61, MC-1A	X	X	X						X	X	IAU-34A launcher	X	X	X		PS	PS	PS	PS	PS	X		X	302	
F-4B	Aircraft-Missile Interf. Effects Vehicle (Missile shape without fins)			X												X	X						X		417	Pressure data.
F-4C (IM, 51)	MC-82SE, SGU-13, M-117R	X	X	X								VER	X	X								X			480	Separation Data
F-C (IM, 51)	Sandpiper	X		X												X	X	X	X	X	X	X			481	Separation and Isolated Store Data
F/W-4B-C	300 and 600-Gal. Tanks, Sparrow, MC-57	X	X	X	X						X		X	X	X	A	A	A	A	A	A	X			482	
F-4C (IM, 51)	B-57	X	X	X									X	X	X		X	X	X			X			491	Separation and Isolated Store Data
F-4C (IM, 51)	Pave Storm I and II		X	X									X	X								X			492	Separation Data

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE						MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	NER	TER	CIRCLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL			
F-4C (1M, 51)	SUU-51/B	X	X	X					X				X	X								X			500	Separation Data	
F-4C (1M, 51)	SUU-51/B, M117		X	X						X				X	X							X			504	Store Pressure Distributions Are Included with Separation Data.	
F-4 (1M, 51)	BUJ-1/B, LAU-3/A		X	X						X				X	X							X			506	Separation Data	
F-4C (1M, 51)	AGM-62A		X	X						X				X	X		X					X			507	Separation Data	
F-4C (1M, 51)	LAU-61/A		X	X					X	X				X	X							X			512	Separation Data	
F-4C (1M, 51)	SUU-51/B		X	X					X	X				X	X							X			515	Separation Data	
F-4C (1M, 51)	MC-20		X	X					X	X				X	X			X	X			X			516	Separation Data	
F-4J (1M, 51)	Two Conformal Carriage Systems, MC-82	X	X	X			X		X	X				X	X		A					X			520		
F-4C, E (1M, 51)	LAU-68A/A		X	X						X				X	X							X			523		
F-4C (1M, 51)	M117		X	X					X					X	X							X			524	Separation Data	
F-4 (1M, 51)	M117, MC-81, MC-84		X	X					X	X	X			X	X							X			526	Separation Data	
F-4E (1M, 51)	Conformal Pallet, MC-82, 370-Cal. Tank	X	X	X	X		X		X	X	X			X	X		S	S	S			X			530	Séparation Data	
F-4C (1M, 51)	SUU-51B/B		X	X						X				X	X							X			531	Separation Data	

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE						MACH RANGE			STORE, BACK, PYLON and/or AIRCRAFT AIRLOADS DATA								AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	MER	SIMPLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL						
F-4C (1M, 51)	MC-84, Modular Weapon	X	X	X						X	X			X	S	S	S	S	S	S	S	X			532	Separation Data			
F-4C (1M, 51)	SUU-16/23A, MUJ-52/B, ML17, MC-82	X	X	X					X	X	X		X	X	S	S	S	S	S	S	S	X			534				
F-4C (1M, 51)	Modular Weapon	X	X	X					X				X	X								X			537	Separation Data			
F-4 (1M, 51)	LAU-3A, 370-Gal. Tank	X	X	X					X	X			X	X		A	A	A				X			540				
F-4C (1M, 51)	LAU-69A	X	X	X					X	X			X												544	Separation Data			
F-4B/J (1M, 51)	Sparrow III	X				X				X			X	X								X			555	Separation Data			
F-4 (1M, 51)	SUU-51B/B LCPH			X					X				X	X								X			556	Separation Data			
F-4 (1M, 51)	Sidewinder, Sparrow	X	X	X		X				X			X	X		PS						X	X		558	Mainly F-4 Performance Some Store Drag			
F-4 (1M, 51)	Conformal Stores MC-82, ML17	X												X	X	A	A					X			562				
F-4 (1M, 51)	SUU-41	X	X	X					X	X			X	X		S	S	S	S	S		X			565				
F-4 (1M, 51)	Black Crow		X	X					X				X	X								X			564	Separation Data			
F-4 (1M, 51)	SUU-41, ML17, MUJ-18 LAU3/A, 370-Gal. Tank	X	X	X				X	X				X	X								X			567	Separation Data			

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS	
		FUSELAGE	WING	PYLON	TARGET	SEMI- SURFACED	CONFORMAL	WING-TIP	MER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT			THEORETICAL
F-4 (1M, 51)	Sidewinder Sparrow	X	X	X		X				X		X	X		PS							X	X		572	F-4 Performance RPT Some Store Drag
F-4 (1M, 51)	Conformal Stores MK-82, ML17	X											X	X	A	A						X			573	
F-4 (1M, 51)	Conformal Stores	X										X	X	X	A	A						X			576	
F-4 (1M, 51)	Sparrow III	X										X	X		(SEE REMARKS)							X			578	Gives Maximum Structural Loads Encounter by Sparrow Wings
F-4 (1M, 51)	SUU-51		X	X						X		X	X		S	S						X			579	Separation Data
F-4 (1M, 51)	Sparrow III	X				X						X	X												580	Separation Data
F-4C	300-Cal. Tanks, ML173P, BUU-1C/B, ACM-62/A	X	X	X					X			X	X	X								X			586	
F-4	R-723; MK-82 LDGP-TER, Single; MK-81 LDGP-Single									X			X	X	S	S	S	S	S	S	S	X			588	
F-4 D,E	Sparrow, MK-82 LDGP, MK-84 LDGP, MK-84 LCB, MK-84 LCB (PFP), MK-84E/O, SUU-30H/B, BUU-27A/B, 600- Cal. Tank, AIM-7	X	X	X	X		X		X	X		X	X	X	A							X			591	
F-4	SUU-42 (TFD)	X	X	X					X	X					S	S	S	S	S	S	S	X			593	Separation Data - with or without Parent Aircraft

TABLE A-5. F-4 AIRCRAFT-STORE DATA INDEX (Concluded)

AIRCRAFT (Wing-fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE		DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	WEP	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	VAN	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
F-4C	Pavestorm O, I & II, ML18 1GB, MC-84 B0GB, SUU-30N/A, 370-Gal. Tank, SUU-51B/A, M172, M212, M312, Rockeye	X	X	X					X	X	X		X	X		A	A	A	A	A	A	X			594	
F-4C	300-Gal. Tank, MC-82, MC-84, MC-20, M117/131, AGM-62/A Walleye	X		X					X	X	X		X	X	X	A	A	A	A	A	A	X			595	

TABLE A-6. F-5 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-fuselage position, Wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE BACK TYPE				MACH RANGE			STORE, BACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE		DATA REFERENCE NUMBER	REMARKS		
		FUSELAGE	WING	PYLON	TARGET	SEMI- SUBMERGED	CONFORMAL	WING-TIP	MER	TFR	CIRCLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAW	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL			INFLIGHT	THEORETICAL
F-5 (LM, 27)	50-gal. tank, LAU-3/A, MK-82, BUU-1/B, tow target, ML17, SUU-20/A		X	X						X		X			A	A							X		81	
F-5 (LM, 27)	50-gal. tip tank, Sidewinder (1A) pylons, 150-gal. tank, Bullpup A, LAU-3/A, LAU-10/A, ML17 SUU-25/A, BUU-1/B, ML17 LD, MK-81, -82, -83, -84LDGP, TBU-11/B, SUU-20/A, CBU-2A/A, B37K-1, Dart tow target	X	X	X			X	X		X	MER-13	X	X	X	E, A	A						X	X		142	
F-5A (LM, 27)	MK-81, MK-82, ML17, BUU-1/B, BUU-27/B, LAU-3/A, 50-gal. tank	X	X	X						X		X	X	X		A	A						X		163	
F-5A/B (LM, 32)	150-and 275-Gal. Tanks, BUU-1/B, MK-81, MK-82, MK-83, MK-84, ML17, SUU-20/A, LAU-3/A, AGM-12/B, LAU-10/A	X	X	X				X	X	X	X	X	X	X	A	A	A	S	S	S		X	X		194	

TABLE A-7. F-8 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE	REMARKS
		FUSELAGE	WING	PYLON	TARGET	SEMI- BURIED	CONFORMAL	WING-TIP	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
F-8u (NW, 47)	Sparrow	X	X	X	X			X		X		X	X		S					X	X	X	11, 18	
F8U-3 (NW, 47)	Sparrow	X								X			X	X	A	A	A	A	A	X	X	X	19	
F8U-2H (NW, 47)	Zuni	X		X							LAU- 33A/A	X	X	X	A	A	A	A	A	X			26	
F-8 (NW, 47)	150-Cal. Tank, Walleye, MK-83 Bomb	X	X	X						X		X	X		A	A				X			44	
F-8 (NW, 47)	MC-77, MC-79, 150-and 300- Cal. Tanks, MC-81 and -82 SRLD, LAU-10/A, MER, TER		X	X					X	X		X	X		A					X			49	
F8U-3 (NW, 47)	Store (three scales)	X	X	X						X		X	X	X	A						X		50	
F-8 (NW, 47)	Walleye		X	X						X		X	X		A	A				X			58	Includes A-7 and F-8 comparison data.
F-8c (NW, 47)	Bullpup A, Bullpup B, MC-84, MC-82, Pylon, Zuni	X	X	X					X	X		X	X	PS	S	S	PS	PS	PS	X	X	X	164	
F-8c, J (NW, 47)	Fuselage: Zuni (2.4 tube), Sideswinder (single and dual) Single (Wing): MC-80 series, MC-79, MC-77, AN-N series, LAU-10/A, etc. Multiple (Wing): MC-80 series, RL17, AN-N series bombs, etc.	X	X	X					X	X		X	X	X	S					X	X	X	165	
F-8 (NW, 47)	Bibliography (See remarks)	X	X	X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	166	Bibliography of F-8 aircraft-store carriage and separation reports
F8U-3 (NW, 47)	Sparrow, missile pack, fuel tank	X		X						X				X	A	A	A	A	A	X			203	
F8U-2H (NW, 47)	Bullpup A & B, LAU-10/A, MC-84, Zuni (fus.)	X	X	X					X	X		X	X	X	A	A	A	A	A	X			295	
XF8U-1 (NW, 47)	Sparrow II, Various Paired Shapes	X	X	X	X	X		X		X		X	X	X	A	A	A	A	A	X	X	X	403	

TABLE A-8. F-14 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS	
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	MER	TER	SINGLE	OTHER	SUBSONIC	TRANS- SONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT			THEORETICAL
F-14	Sparrow, Phoenix	X	X	X	X						X	Pallet	X	X	X		S	S	S	S		X			416	
F-14	MC-82, ML17, SUU-51, 3 Bluff Shapes	X	X	X	X					X			X	X			S	S				X			420	
F-14	Phoenix		X	X							X		X	X	X	A	A					X			498	
F-14A	Sparrow, Phoenix, ZAP Rocket, Pod, MC-85, 267- Gal. Tank, 300-Gal. Tank, MC-84	X	X	X							X		X	X	X	S	S	S	S	S	S	X			508	
F-14D	All Applicable Stores	X	X	X							X		X	X	X		(SEE REMARKS)								509	Describes Store Loadings
F-14A	(See Remarks)																								510	Aircraft Geometry
F-14	Fuel Tank, Phoenix, Spar- row, Sidewinder, MC-82-ED, Rockeye 2, LAU-10, Dispenser	X	X	X						X		Pallet	X	X	X	A	A	A				X			585	

TABLE A-9. F-86 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE					MACH RANGE			STORE, BACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	WING	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL				
F-86F (1M, 35)	T-54 (750-lb GP bomb)	X	X							X		X	X	X								X			13	Summary document for Cornell F-86 (T-54) test series.		
F-86F (1M, 35)	T-54 (750-lb GP bomb)		X	X						X		X	X	X									X		14	Description of Cornell series inflight test program and instrumentation.		
F-86F (1M, 35)	T-54 (750-lb GP bomb)		X	X						X		X			S	S	S	S	S			X			16	Flow field data included.		
F-86F (1M, 35)	T-54 (750-lb GP bomb)		X	X						X		X												X	17	Theoretical approach to flow field and airloads prediction.		
F-86 (1M, 35)	245-gal fuel tank		X	X						X		X	X	X		S	S	S	P, S	S		X			235	Data includes load distribution on store and pylon		
F-86A-1 (1M, 35)	External fuel tanks		X	X						X		X	X	X									X		249	Buffet data with or without stores		
F-86F (1M, 35)	T-54 (750-lb GP bomb)		X	X						X		X	X	X		S	S					X		X	464			

TABLE A-10. F-105 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE		STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA								AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	NER	TER	SINGLE	OTHER	SUBSONIC	TRANS- SONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
F-105 (NW, 48)	QRC-160 ECM pod, 450-Gal. Fuel Tank		X	X						X		X				A	A						X		372	
F-105 (NW, 48)	450-Gal. Fuel Tank, AM/ALE-2 Dispenser, LAH- 3/A, MK-83	X	X	X						X		X		X		A, PS, PS, S	PS, S	PS, S	PS, S	PS, S	PS, S	X		X	373	Also defines airload distributions and local flow angles.
F-105D (NW, 48)	ML17, 450-Gal. Fuel Tank		X	X						X		X		X				PS, S	PS, S	PS, S	PS, S	X			374	
F-105D (NW, 48)	ELU-1B, 450-Gal. Fuel Tank		X	X						X		X		X				S	PS, S	PS, S	PS, S	X			375	
F-105D (NW, 48)	CBU-5B, CBU-7A, ML17 Frag.	X	X	X					X			X		X		PS	PS	PS			PS		X		376	
F-105B (NW, 48)	SUU-7/A, M-129, GAM 83A (Ballup A), MU-10B Mine, 450-Gal. Fuel Tank		X	X						X		X		X		A							X		377	
F-105D (NW, 48)	ML17	X	X	X					X			X		X		A	RS	RS	RS	RS	RS	X			378	
F-105D (NW, 48)	ML17		X	X					X			X		X			RS	RS	RS	RS	RS				379	
F-105D (NW, 48)	M-43 with various nose shapes, 450-Gal. Fuel Tank	X	X	X					X		X	X		X		A	A					X			380	
F-105 (NW, 48)	ML17, 450-Gal. Fuel Tank, MER, Pylon, ML18 Bomb, 650-Gal. Fuel Tank	X	X	X					X		X	X		X		A	A					X			381	
F-105 (NW, 48)	CBU-5B, MK 116 (Weteye), ADQ-45-2 (1500 and 3000 lb)	X	X	X					X		X	X		X			RS	RS	RS	RS	RS		X		382	
F-105D (NW, 49)	ML17, MC-1, MK-28	X	X	X					X		X	X		X		A						X			399	
F-105F (NW, 49)	450-Gal. tank, ML17, Ballup (XGAM-83)	X	X	X						X		X		X		A						X	X		377	
F-105 (NW, 49)	CBU-34 Dispenser	X	X	X					X		X	X		X		S	S	S	S	S	S	X			323	Includes captive launch trajectory data.

TABLE A-10. F-105 AIRCRAFT-STORE DATA INDEX (Concluded)

AIRCRAFT (Wing-Number) (Wing-Number - det.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION								CARRIAGE BACK TYPE				MACH RANGE			STORE, BACK, Pylon and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	WING	WING	WING	WING	WING	WING	WING	WING	WING	WING	WING	WING	WING	WING	DRAG	LIFT	PITCH	ROLL	WING TUNNEL	WING TUNNEL	WING TUNNEL	WING TUNNEL	WING TUNNEL	WING TUNNEL	
F-105 (Wing-49)	M-43, 450-gal. tanks	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	116	
F-105D (Wing-49)	All aircraft store types	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	175	Includes store drag index system.
F-105F (Wing-49)	650-gal. tank	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	176	
F-105 (Wing-49)	A/B-5X-4 Tank	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	482	Separation Data
F-105 (Wing-49)	Tactical Fighter Dispen- ser	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	482	Separation Data

TABLE A-11. F-111 AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing sweep - deg.) (Wing position, fuselage)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE					STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS		
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	MER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL			INFLIGHT	THEORETICAL
F-111 A/D (NW 26, 35, 50, 72.5)	Maverick	X	X						X			X	X	X		S, PS	S, PS	S, PS	S, PS	S, PS	X			66	
F-111 (NW 70)	SUW - 46/A	X	X						X			X	X	X		A	A	A	A	A	X			73	Simulated F-111 model.
F-111 A/B (NW 26, 35, 50, 72.5)	Phoenix, MK-43, TX-61, M-61, Gun Pod, 450-Cal. Tank, MK-43, 600-Cal. Tank	X	X						X							PS, S	PS, S	PS, S	PS, S	PS, S	X			85	Data Index-Volumes II and III contain wing store airloads. Volume IV-key store airloads.
F-111 (NW 26, 35, 50, 72.5)	MK-43, 600-Cal. Tank	X	X							X		X	X	X		PS, S	PS, S	PS, S	PS, S	PS, S	X			86	Basically a test data index. Pressures on wing, hor. stabilizer, and ventral fin included.
F-111 (NW 26, 35, 50, 72.5)	SRAM, MK-43, MK-57, MK-61 600-Cal. Tank	X	X						X			X	X	X		PS, S	PS, S	PS, S	PS, S	PS, S	X			87	Basically a test data index report.
F-111 (NW 16, 26, 50, 60, 72)	Single: MK-43, ML18, MK-84, SRAM, Dart Tow Target MER: MK-82, MK-82R, ML17, ML17R, CHU-28/B	X	X						X			X	X	X		PS, S	PS, S	PS, S	PS, S	PS, S	X			88	Basically a test data index report.
F-111A (NW 16, 26, 35, 50, 72.5)	Single: TNU-28/B TER: ML17R, LAU-3/A, BUJ-1C/B MER: ML17R	X	X							X		X	X	X		PS, S	PS, S	PS, S	PS, S	PS, S	X			89	Basically a test data index report.
F-111D (NW 26, 50, 60, 72.5)	AIM-7G (Sparrow)	X	X						X			X	X	X		S	S	S	S	S	X			91	Basically a test data index report.
F-111A (NW 26, 35, 50, 72.5)	Single: ML18, B-43, B-61 TER: LAU-3/A MER: ML17R	X	X						X			X	X	X		PS, S	PS, S	PS, S	PS, S	PS, S	X			90	Basically a test data index report.

TABLE A-11. F-111 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing- fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS	
		FUSELAGE	WING	PYLON	TANDEM	SEMI- SURFACED	CONFORMAL	WING-TIP	NER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT			THEORETICAL
F-111A (W, 16, 26, 50, 72.5)	Single: M18, B-43, B-61 TER: BU-1C/B, LAU-3/A		X	X						X			X	X	X		PS S	PS S	PS S	PS S	PS S	X			94	Basically a test data index report.
F-111 (W, 72.5)	Phoenix (modif.)	X	X	X						X						X	A	A	A			X			114	Includes speedbrake effects.
F-111 (W, 65, 72.5)	600-Cal. Tank		X	X						X						X	A	A	A			X			115	
F-111 (W, 26, 72.5)	Phoenix (modif.)		X	X						X			X	X	X		A	A	A			X			117	
F-111 (W, 26, 72.5)	450-Cal. Tank		X	X						X			X	X	X		A	A	A			X			120	
F-111 (W, 72.5)	Phoenix, Pylon		X	X						X						X	A	A	A	A	A	X			121	
F-111B F-111 (W, 26, 65, 72.5)	Phoenix, MC-43, 600-Cal. Tank		X	X						X			X	X	X		A	A	A			X			122	
F-111 (W, 72.5)	MC-43, TX-61, SRAM		X	X						X						X	A	A	A	A	A	X			124	
F-111 (W, 50, 72.5)	Maverick (AGM-65A), Pylon		X	X							Triple Launchers					X	A	A	A	A	A	X			125	
F-111C (W, 16, 26)	MC-82D/SE, MC-43, 600- Cal. Tank, MC-84, M117, CBU-24 B/B		X	X						X	X				X		A	A				X	X		133	
F-111 (W, 16-72.5)	MC-81, MC-82, MC-43, 600- Cal. Tank, M117, Sparrow, etc.	X	X	X	X				X	X	X	NER-100	X	X	X		A	A	A	A	A	X	X	X	134	
F-111A (W, 26- 72.5)	All compatible F-111 stores		X	X					X	X	X		X	X	X		P, R, S					X	X		135	

TABLE A-11. F-111 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	NER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
F-111A (NW, 16, 26, 35, 50, 72.5)	450-and 600-gal. tanks, TX-61, MK-43		X	X						X		X	X	X			A	A	A	A		X			325	
F-111A, F-111 (NW, 26- 72.5)	BDU-12/B, BDU-38/B, AGM- 65A (Maverick)	X	X							X	AGM-65 Launcher	X	X			S	S	S	S	S		X			340	Captive trajectory test but includes store airloads
F-111B (NW, 26, 35, 50)	Phoenix	X	X							X		X				S	S	S	S			X			343	
F-111 (NW, 26, 35, 50, 72.5)	Phoenix, MK-43	X	X							X		X	X	X		S	S	S	S			X			348	Excellent summary of effects of NW, OC, sweep, and store position on airloads
F-111 (NW, 16- 72.5)	MK-82 GP/S, MK-84, M117 GP/R, M118, B-43, B-57, B-61, CBU-24B/B, CBU-12/A, SPAM, 600-gal. tank, BRU-3A/A, Pylons	X	X							X	BRU- 3A/A	X	X	X	A							X	X	X	351	
F-111E (NW, 16- 72.5)	Most compatible stores	X	X							X	BRU- 3A/A	X	X	X	A							X	X	X	352	
F-111D (NW, 26, 50, 72.5)	Maverick (AGM-65A)	X	X								AGM-65A Launcher	X	X	X		S	S	S	S			X			386	Identifies store or store interference effects. Five volume set.
F-111 (NW, 50)	Maverick (AGM-65A)	X	X								AGM-65A Launcher	X	X	X		PRS	PRS	PRS	PRS	PRS	PRS	X			387	Preliminary aerodynamic data survey. Store shapes used in wind tunnel tests are closely similar to Maverick missiles.
F-111D(NW, 26, 35, 50, 72.5)	Maverick (AGM-65A)	X	X								AGM-65A Launcher	X	X	X		PRS	PRS	PRS	PRS	PRS	PRS	X			385	Data are included in Vol. 2-1a

TABLE A-11. F-111 AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, BACK, Pylon and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PIYLON	TANDEM	SMI-SUPERCARGO	CONFORMAL	WING-TIP	MER	TER	GIMBLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAW	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
F-111 (W, 26, 50, 72.5)	MK-82, MK-61, MK-43, MK-57, SRAM, MK-84, QRC pods, ML178, MK-83, 600-gal tank, CMU-34, BUU-51/B, ML18, ML17	X	X	X					X	X	X	MER-100	X	X		S						X			136	
FB-111 (W, 50)	(See Remarks)																								161	Secret report
F-111D (W, 26, 50, 72.5)	Maverick		X	X								Rail	X	X	X		RS, S	RS, S	RS, S	RS, S	RS, S	X			194	Basically a test data index report.
F-111 (W, 50, 72.5)	Maverick		X	X								Rail			X		PS RS	PS RS	PS RS	PS RS	PS RS	X			195	Basically a test data index report.
F-111 (W, 26, 35, 50, 72.5)	Single: MK-43, TX-61, N-61, gun pod, Phoenix, 450-gal tank TER: CMU-34/A MER: ML17	X	X	X					X	X	X		X	X			PS RS	PS RS	PS RS	PS RS	PS RS	X			196	Basically a test data index report. Also includes bay store airloads.
F-111A (W, 50, 72.5)	ML178, ML18, B-43, 600-gal tanks		X	X					X				X				PS RS	PS RS	PS RS	PS RS	PS RS	X			312	Basically a test data index report.
FB-111 (W, 72.5, 50)	MK-43, MK-57, N-61, SRAM		X	X							X	Dual			X	X	X	X	X	X	X	X			462	
F-111E (W, 26, 35, 45, 50, 72.5)	BUU-1C/B, F1U-43, BUU-8, 600-Gal. Tank		X	X						X	X		X	X			X	X		X	X		X		435	
F-111A (W, 26, 35, 50, 72.5)	600-Gal. Tank, BUU-1C/B, TBU-28/B, ML178		X	X						X	X		X	X			R, S	RS, R	RS, R	RS, R	RS, R	X			447	
FB-111A	600-Gal. Tank, B-43, B-61, AGM-69A, ML17, CMU-32		X	X						X	X		X	X	X	A							X		468	

TABLE A-11. F-111 AIRCRAFT-STORE DATA INDEX (Concluded)

AIRCRAFT (Wing-Fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS		
		FUSELAGE	WING	PYLON	TANGENT	SDI- SUBMERGED	CONFORMAL	WING-TIP	MER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFIGHT			THEORETICAL	
F8-111 (NW, 26, 35, 45)	600-Gal. Tank		X	X						X		X	X									X				521	Separation Data
P-111D NW	600-Gal. Tank, MC-84, BDU-38/B, M117R, ADK-9B		X	X						X	BDU- 3A/A	X	X	X	(SEE REMARKS)								X			536	CAT II Flight Test Report
F8-111 NW	Phoenix, 600-Gal. Tank		X	X						X		X	X	X	A	A	A	A	A	A	A	X				577	
P-111 NW	Various		X	X						X		X	X	X	A	A	A	A	A	A	A	X				584	

TABLE A-12. MISCELLANEOUS AIR FORCE AIRCRAFT-STORE
DATA INDEX

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE BACK TYPE				MACH RANGE			STORE, BACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE		DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TAPERED	SEMI- SUBMERGED	CONFORMAL	WING-TIP	MER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFILIGHT	THEORETICAL		
A-37B (120°, 2)	ML17 GP, SUU-30 A/B, LAU-3/A, SUU-25 B/A, AR-M74A, SUU-20/A	X	X							X			X				A						X		146	Store drag index.
A-37B (120°, 2)	AR-M74A, LAU-3/A, SUU- 30 A/B, ML17 GP, SUU- 20/A, LAU-32/A	X	X							X			X				A						X		147	Includes store drag index.
A-37A (120°, 2)	BUU-23, MK-81, SUU-14, BUU-1 C/B, LAU-32/A, SUU-30, MK-82, SUU-7A, SUU-11, ML17, 100-Cal. Tank	X	X	X						X							A						X		155	Includes store drag index.
F-100A (40°, 49)	200-275-Cal. Tanks	X	X							X							X	S, AS, AS, A	S	S			X		23	
F-100B (40°, 49)	2000-lb GP Bomb	X	X							X							A	A					X		39	
F-100C (40°, 49)	Fuel Tanks (6 types)	X	X							X							A	A	A	A	A	A	X		220	
F-100D (40°, 49)	DAC low drag shapes	X	X							X							X	X	S	S	S	S	X		232	
F-100C (40°, 49)	MAA external store (255-in.)	X	X							X							A	A					X		144	
F-101B (120°, 35)	450-Cal. Tank	X	X							X							X	X	A	A	A	A	X		221	
F-104 (40°, 26)	Sidewinder, large finned missile, fuel tank	X	X	X				X		X		Area rule pod	X	X	X	X	A	A	A	A	A	A	X		226	
F-104 (40°, 26)	Sidewinder, Falcon, and fuel tanks	X	X	X				X		X							X	X	A	A	A		X		145	
F-106A (120°, 60)	360-Cal. Tanks	X	X							X							X	X							373	
F-100C (40°, 49)	MAA External Store with or without fins (33-in. dia. x 255-in. length)	X	X							X							X	X	S	S	S	S	X			
F-82/TF- 104C (40°, 26)	Fuel Tanks, AIM-9B	X	X							X							X	X					X	X	393	

TABLE A-12. MISCELLANEOUS AIR FORCE AIRCRAFT-STORE
DATA INDEX (Concluded)

AIRCRAFT (Wing-usage position, wing sweep-deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE				MACH. RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						DATA REFERENCE NUMBER	REMARKS		
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SURFACED	CONFORMAL	WING-TIP	NER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL			INFLIGHT	THEORETICAL
F-100D (MW, 49)	BUI-2718, M117, 335-Gal. Tank, MK-82		X	X						X			X			A	A	A	A	A		X		331	
F-100 A, C (MW, 49)	200-, 275-, and 563-Gal. Tank With or Without Fins, 1000-lb Ex Bomb E-26 or E-29 Tank, MK-7, MK-12, 1000- and 2000-lb GP Bomb, MA-3 Launcher, Sidevinder (GAR-8), Napalm, Pylon	X	X							X			X				S, S, S, A A A	S, S, S, A A A	S, S, S, A A A	S, S, S, A A A		X		342	
F-100A, C (MW, 49)	200-, 275- and 563-Gal. Tank, E-26 and E-29 Tanks, MK-7, MK-12, Ex-Series Bombs, GP Series Bombs, MA-4, Sidevinder, Napalm Tank	X	X	X						X			X			X	A	A	A	A		X		330	Also includes additional span load distribution due to stores.
F-101	ECM Pod (Single and Dual)		X	X						X	Dual Rack	X	X	X	X	X	PS	PS	PS	PS	PS	X		370	Utilizes a wing mounted, external Pylon-store balance
F-104 (MW, 28)	Various Stores	X	X	X						X			X	X	X							X		332	
F/RF-104G (MW, 28)	M117A, 200-Gal. Tank	X	X	X						X			X	X	X		A				A			333	
F-104G (MW, 28)	AS-37 Missile, Tip Tank AJ-168 Missile		X	X						X			X	X	X	X	A	A	A	A	A	X		334	
F-107A (MW, 50)	Shape 28 (17 store shapes)	X	X	X						X			X	X	X	X	A	A	A		A	X		329	
F-4 (MW, 2)	MK-55, MK-52, MK-36, MK-50		X	X						X			X			A	A					X		335	
S-3A (MW, 20)	LAU-69, MK-55, Aero 1D		X	X						X			X			A	A	A				X		336	
F-101B	HAST	X	X	X									X	X	X	X	S	S	S	S	S	X		458	
F-101B	HAST	X	X	X									X	X	X	X	S	S	S	S	S	X		469	

TABLE A-13. MISCELLANEOUS NAVY AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)		STORE IDENTIFICATION		STORE MOUNTING LOCATION						CARRIAGE/RACK TYPE				MACH RANGE		STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						DATA REFERENCE NUMBER		REMARKS		
				FUSELAGE	WING	PYLON	TARGET	SEMI- BURIED	CONFORMAL	WING-TIP	NER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAW	LIFT	PITCH	SIDE	YAW	ROLL		WIND TUNNEL	INFLIGHT
F2H-5 (NM,0)	Sparrow	X		X							X		X	X	X	X	S,R,S,R,S,R,S,R	A	A	A		X	X		3,4	Critical design loads
F2H-2H (NM,0)	Sparrow (XAM-N-2) 150 gal DAS tank	X		X					X		X		X				A	A	A						76	Includes above wing store installation
XF3D-1 (NM,6)	Sparrow	X		X							X		X				A	A	A			X			9,18	Ref. 9 includes store effects on buffet
F3D (NM,6)	Sparrow II	X		X							X		X												20	Flow field data
F3H-1 (NM,47)	Sparrow	X		X							X		X	X	X	X	S,R,S,R,S,R,S,R	S,R,S,R	S,R,S,R	S,R,S,R		X	X		3,4	Critical design loads
F4D-1 (NM,50)	Sparrow	X		X							X		X	X	X	X	S,R,S,R,S,R,S,R	S,R,S,R	S,R,S,R	S,R,S,R		X	X		3,4	Critical design loads
F4D-1 (NM,50)	Sparrow I (XAM-N-2)	X		X							X		X				S,AS,AS,A	S	A	A					12	
F4D-1 (NM,50)	Sidewinder (mod.)	X		X							X		X				S	S	S	S					18	
F3D-1 (NM,50)	Store (three scales)	X		X							X		X	X	X	X	A								50	
F7U-3 (NM,38)	Sparrow	X		X							X		X	X	X	X	S,R,S,R,S,R,S,R	S,R,S,R	S,R,S,R	S,R,S,R		X	X		3,4	Critical design loads
F7U-3 (NM,38)	Sparrow, rockets, DAS bombs, tanks, others	X		X					X		X		X	X	X	X						X	X		22	
F7U (NM,38)	Various store shapes w/o fins	X		X					X		X		X				A	A	A	A	A	X			301	
F7F-2 (NM,35)	EX-10 low drag bomb AMC low drag bomb	X		X							X		X				A	S,AS,AS,A	S,AS,A	S,AS,A					7	Also wing pressure distributions
F7F-8 (NM,35)	Sidewinder (mod.)												X				S	S	S	S					18	
F10F (NM,15)	Sparrow	X		X							X		X	X	X	X	S,R,S,R,S,R,S,R	S,R,S,R	S,R,S,R	S,R,S,R		X	X		3,4	Critical design loads
RA-5C (NM, 43)	RA-5C, MK-28, MK-34, MK-57, 400 gal Tanks	X		X							X		X	X	X	X	A								400	

TABLE A-13. MISCELLANEOUS NAVY AIRCRAFT-STORE DATA INDEX (Concluded)

AIRCRAFT (Wing-Fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CAPRIATE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA								AIRLOADS DATA TYPE				DATA REFERENCE NUMBER	REMARKS
		PORTEGE	WING	PYLON	CANTILEVER	SEMI- SUBMERGED	CONFORMAL	WING-TIP	REF	TIP	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	WEIGHT	THEORETICAL					
S-3A (HW,15)	Aero-ID, MK-55, LAU-69		X	X						X		X	X		A	A	A	A	A	A	A	X			486				
S-3A (HW,15)	All Compatible Stores														(SEE REMARKS)										487	Stores Geometric Data			
S-3A (HW,15)	Aero-ID		X	X								X			A	A	A	A	A	A	A	X			496				

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX

AIRCRAFT (Wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION								CARRIAGE RACK TYPE				MACH RANGE		STORE, RACK, Pylon and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PIYLON	TAVERT	SEMI-SUBMERGED	CONFORMAL	WING-TIP	MR	TR	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFIGHT	THEORETICAL		
AVRO C-105	Sparrow	X									X				X		S	S				X			18	
Swpt Wing Bomber	General shape		X	X						X					X	S						X			18	
Delta Wing Aircraft	General shape		X	X						X					X	S	S	S	S			X			18	
Straight Wing Aircraft	General shape		X	X						X			X		X	S						X			18	
B-68 (MW)	Streamlined and Bluff Bombs	X	X								X				X	S	S	S	S			X		X	21	
Generalized Aircraft (MW, 50)	Generalized store		X	X						X			X		X	A	A					X			28	
Generalized Aircraft (MW, 50)	Generalized store		X	X							X		X		X	A	A					X			29	
Various (MW, 25, 50)	MK-81 and MK-82 SELD	X	X	X	X				X		X		X	X	X	A	A	A				X			30	
MIDS III (MW, 50)	MK-82 SELD, MK-79, MK-77, 150 and 300-Cal. Tanks		X	X						X			X	X	X	A	A	A				X			35	
Wing-Pase-lage (MW, 45)	Large stream-lined store (with or without fins)		X	X							X		X	X	X				S, PS	S, PS		X			41	Includes measured C_D and C_m data comparisons with empirical technique.
Generalized wing-body (MW, 25)	MK-77, MK-79, MK-83, MK-84 150 and 300-Cal. Tanks		X	X							X		X	X	X	A	A					X			40	
Generalized wing-body (MW, 25)	Generalized Walleye		X	X							X		X	X	X	A	A					X			48	
MIDS III (MW, 50)	Generalized Walleye		X	X							X		X	X	X	A	A					X			54	
MIDS III (MW, 50)	MK-82 LD/F		X	X							X		X	X	X	A	A					X			60	Includes comparison A-4 data.

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS	
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	WING	TER	SINGLE	OTHER	SUBSONIC	TRANS- SONIC	SUPER- SONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT			THEORETICAL
Research Aircraft (HW, 50)	Conformal shapes (cubical, rectangular, cylindrical)	X									X	pallet	X	X	A							X			65	
P-14A (HW, 22, 45, and 68)	Phoenix, Sparrow, Pallet, Clean	X	X	X						X	Pallet		X									X			75	Basically flow field data, Supplement I includes Phoenix and Sparrow captive airloads.
Wing-body Carrier (HW, 20)	(Missile)	X	X	X			X			X			X		A	A	A					X			101	
Arrow Wing-Body (70)	Nacelle		X	X						X				X	A	A	A					X			110	
Multimission Aircraft (HW, 25-108)	750-lb., 2500-lb., CAR-8 stores	X	X	X						X	Dual CAR-8	X	X		A	A	A					X			113	
X-15-2 (HW, 38)	Fuel/Oxidizer Tanks	X								X				X	A	A							X		123	
Delta Wing-Fuselage (HW, 60)	Finned bodies of revolution (L/D = 8,10,12)	X	X	X						X			X	X	A								X		126	
Swept Wing-Fuselage (HW, 45)	remained body with or without fins (L/D = 8.5)	X	X	X						X			X	X	A, S	A, S	A, S	A, S	A, S	A, S	A	X			127	
Wing-Fuselage (P-4) (HW, 51)	Sparrow	X			X	X								X	X	S	S	S	S	S	X	X	X		128	Measured data are incremental interference on the store
Modified Wing-Body (HW, 25)	MR-81 and MR-82 SE	X	X	X	X	X			X	X			X		A	A	A					X			129	
Swept wing-Body (HW, 25)	MR-81 and MR-82 SE	X	X	X	X	X			X	X			X	X	A	A	A					X			130	

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS		
		FUSELAGE	WING	PYLON	TANGENT	SEMI-SUBMERGED	CONFORMAL	WING-TIP	PER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPersonic	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	HIPLIGHT			THEORETICAL	
Swopt Wing- Body (NW, 50)	Rectangular, cubical, and cylindrical conformal store shapes	X				X						X	X		A	A					X			131		
Ryan Q-2 Drone	Camera pods, wing tip pods	X	X									X	X		A	A	A	A	A			X			138	
Swopt Wing- Body (NW, 55)	Macelles	X	X	X						X				X	A							X			156	
Swopt Wing- Bomber (NW, 40)	DAC streamlined and bluff bomb shapes	X	X	X						X		X	X		A	A	A					X			158	
B-58 (NW, 60 Δ)	Pod and Free-fall Pod	X		X						X				X	A	A	A	A	A	A		X			159	
Lightning	(See Remarks)																								181	Secret report
AMBA (NW - variable)	(See Remarks)											X	X	X								X			182	Secret report
AMBA (NW - variable)	(See Remarks)												(high speed)									X			183	Secret report
Bomber(DAC) (NW-37.5)	Selected stores and tanks	X	X	X	X	X				X		X	X		A	A	A					X			184	
Generalized Aircraft (NW, 48)	Ogive cylinder shape w/wo fins	X	X	X						X	X		X		S	S	S	S	S			X			193	Includes installed local store flow field data and installed and free- stream forces and pressures on store.
Bomber-Wing Fuselage (NW, 49)	Generalized store shapes w/wo fins and afterbodies	X	X							X				X	A	A	A	A	A	A		X			198	
D-558-II (NW-39)	150 Cal. DAC shape tank	X	X							X		X	X									X			199	Includes store fin loads and wing panel loads
Wing- Fuselage (NW-11)	Generalized store	X								X				X	A,SA,S	S	S	S	S			X			200	Primarily contour plots of store air- loads in presence of wing-fuselage. Store mounted on auxiliary sting.

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

TABLE A-14. MISCELLANEOUS AIRCRAFT STORE DATA INDEX (CONTINUED)																											
AIRCRAFT (Wing-Fuselage Position, Wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION								CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS	
		FUSELAGE	WING	PYLON	TARGET	SEMI- SUBMERGED	CONFORMAL	VING-TIP	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL				
Generalized Aircraft (NW-56)	Generalized store	X		X							X			X	X	A						X			201	Rocket launched model	
Wing- Fuselage (NW-48)	Generalized store shapes with or without fins and afterbodies (See Remarks)		X	X						X				X	P, P, S, P, S, P, S, S						X		X	202	Includes Schlieren		
Body-of- Revolution (NW-48)		X				X								X	X	A						X			205	Contains semisubmerged store cavities drag	
D-558-II (NW-39)	1000-lb. DAC Bomb, 150- Gal. DAC Fuel Tank		X							X				X	X		A	A	A	A					206		
Delta Wing Booster (NW-60)	Nacelles		X	X						X				X	X	A	A	A							207	Rocket launched models	
Wing-Bodies (NW-50)	Generalized stores		X	X						X				X	X	A	A								208		
D-558-II (NW-39)	150-Cal. DAC shape tank		X	X						X				X	X	A	A								209		
Wing- Fuselage (NW-56)	Generalized stores		X	X						X					X			P, S, S				X		X	210		
Wing- Fuselage Combinations (NW-56)	Sparrow		X							X				X	X	S	S	S	S	S	S	X			211	Store mounted on sting	
Generalized Aircraft (NW-56)	Generalized stores	X								X				X	X	A								X	212	Rocket launched models	
Wing- Fuselage (NW-48)	Generalized hook shapes	X								X						X, A, S, A, S, A, S	S	S	S	S	X			213	Store mounted on auxiliary sting		
Wing- Fuselage (NW-49)	Gullwing "hook"		X											X	X		A, S	S	S	S	S	X			214	Store mounted on auxiliary sting	
Swept-Wing Aircraft (NW-46)	Experimental missile shape		X	X											X	X, A, S							X	215			

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIER BACK TYPE			MACH RANGE			STORE, PACT, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	VERTICAL SURFACE	CONFORMAL	WING-TIP	TE	TR	CHINLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	LIFT	PITCH	CLIFF	YAW	POLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
Wing- fuselage (NW-46)	Sparrow	X	X	X							X		X	X		A, S	S	S	S	S	X			216	Store mounted on auxiliary sting
Wing- fuselage (NW-50)	Generalized store without fins	X	X								X				X	S	S				X			217	Store mounted on auxiliary sting
Wing- fuselage (NW-46)	Generalized bomb shapes with or without fins	X									X				X	A, S, A, S	A, S				X			218	Store mounted on auxiliary sting
Wing- fuselage configurations	Sparrow	X	X	X							X		X	X		A, S					X			219	
Delta Wing- Body (NW-60)	DAC shape store		X	X							X		X	X	X	A, S, A, S	S	S	S					222	Store is sting mounted, includes wing bending moment
FW (Mod.) (NW-42)	Fuel tanks	X	X	X							X		X	X		A	A, S, A, S, A, S	A, S	A		X			224	Includes pressure data on wing, pylon, store, and horizontal tail
Wing- fuselage (NW-45)	Various stores with or without afterbody and fins	X									X				X	A, S, A, S, A, S	A, S	S	S		X			227	Includes store base drag
Wing- fuselage (NW-4)	DAC shape store	X	X	X							X		X	X	X	A, S, A, S	A, S	A, S	S					228	Store is sting mounted, includes wing bending moment
Wing- fuselage (NW-43)	Generalized store	X									X				X	A, S, A, S	A, S	A, S	S		X			229	Store is sting mounted, includes theoretical pressures
Wing- fuselage (NW-58)	Generalized store	X									X				X	A, S, A, S	A, S	A, S	S		X			230	Store is sting mounted, includes store base drag
D-558-II (NW-38)	DAC shaped stores	X	X	X							X		X	X							X			231	
Wing- fuselage (NW-46)	DAC shaped store	X	X	X							X		X	X	X									232	Store is sting mounted, includes wing bending moment

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (wing-fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CAPRIATE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE	REMARKS
		FUSELAGE	WING	PYLON	TAPERED	SEMI- SURFACED	CONFORMAL	WIND-TIP	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
Wing- Fuselage (MW-48)	Generalized stores without fins	X								X				X	A, S, A, S	S	S				X			234	Store is sting mounted, includes store base drag
Fuselage Only	Bomb shape with fins	X		X						X				X	A	A	A				X			236	Includes bomb-bay data, C.P., and A.C.
Wing- Fuselage (MW-48)	Generalized store without fins	X								X				X	A, S, A, S	S	S				X			237	Store is sting mounted, includes wing root bending moment
Various Wing- Bodies	DAC shapes, 400-2al tank	X	X							X			X	X			S	S			X			238	
Various Wing- Bodies	Various store shapes	X	X							X				X		S					X			239	Store is sting mounted
Generalized Aircraft (MW-48)	Various fuel tank shapes	X	X							X			X	X	A, S	A	A					X		240	
Wing- Fuselage (MW-48)	Sparrow with or without fin fins	X								X				X	S	A, S	S	S	S		X			241	Missile is sting mounted
D-558-II (MW-38)	1000-lb and 2000-lb bomb, 150-gal tank	X	X							X			X	X	A	A	A				X			242	Includes aircraft base drag
F-84 (MW-43)	Wing fuel tank	X	X							X			X	X	A	A	A	A	A		X			243	
Wing- Fuselage (MW-48)	Generalized store	X								X					X	A, S, A, S					X	X		244	Store is sting mounted. Includes store base drag & area rule calculation
Wing- Fuselage (MW-48)	gallup A (mod) with or without fins	X								X				X	S	A, S	S	S	S	S	X			245	Store is sting mounted
Fuselage	Sidewinder	X		X						X			X	X	A	A	A					X		247	Rocket launched model
Wing- Fuselage	Sparrow	X	X							X			X	X	S	A, S	S	S	S	S	X			248	Store is sting mounted.

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE PACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TAVERN	GEAR- SURGEON	CONFORMAL	WING-TIP	PER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	BRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL			
Wing- Fuselage (NW, 48)	Sparrow	X								X		X					S	S	S	S		X		X	251	Store is sting mounted, includes local q and flow angularities	
Fuselage	DAS, WADC, and large diameter bomb shapes	X		X	X	X				X		X	X	X	A	A		A					X		252	Rocket-launched models. Includes buffet data & cavity pressures	
Wing- Fuselage (NW, 5)	DAC store shape	X								X		X	X	X	A								X		253	Rocket-launched models. Includes buffet data & cavity pressures	
D-558-II (NW, 36)	DAC and WADC shape stores	X		X						X					X	A	A	A	A						254		
Fuselage	Generalized store	X		X						X			X	X	A								X		255	Rocket-launched models, includes pressure data	
Two Wing- Bodies- (NW-49, 8)	Sparrow		X	X						X					X	A	A					X			256		
Wing- Fuselage (NW, 49)	Bomb-type external stores		X	X						X		X	X	X	A	A							X		257	Rocket-launched models, includes buffet data	
Two Wing- Bodies (NW-49, 8)	Generalized stores with or without fins	X	X							X		X	X	X	A, SA, SA, S	S	S	S	S						258		
Wing- Fuselage (NW, 47)	Generalized store without fins	X		X						X		X	X	X	A	A	A					X			259	Includes spanwise and chordwise pressures	
Fuselage	10,000-lb bomb without fins	X		X	X	X				X		X	X	X	A		A						X		261	Rocket-launched models, includes buffet data	
Various Wing- Bodies	Nacelles and stores		X	X						X		X	X	X	A							X			262		
Wing- Fuselage (NW, 46)	Nacelles	X								X		X	X	X	A										263	Rocket-launched models	
Wing- Fuselage (NW, 46)	Nacelles	X								X		X	X	X	A	A	A						X		264	Includes wing bending moment	

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TARGET	SEMI- EMBEDDED	CONFORMAL	WING-TIP	NER	SIMPLE	OTHER	SUBSONIC	TRANS- SONIC	SUPERSONIC	DRAG	LIFT	PITCH	CLIMB	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL			
Delta Wing Fuselage (NW, 60)	Nacelles	X							X			X			A	A	A	A	A	A	X			265		
Wing- Fuselage (NW, 46)	Nacelles	X	X							X				X	X	X	A					X		266	Pocket-launched models	
Various Wing- Bodies	Various stores	X	X	X	X					X		X	X	X		S	A	S	S		X			267	Includes wing pressure data	
Bomber Aircraft (BW, 42)	Nacelles		X		X					X		X	X		A	A	A				X			269		
F5D (NW, 53)	DAC store and rocket pack	X	X	X						X		X	X	X	A	A	A					X		270	Rocket-launched model	
Three wing- Bodies	DAC store shapes	X	X	X	X					X				X	A	A	A				X			272		
Wing- Fuselage (NW, 47)	DAC store shape	X	X	X	X					X				X	A	A	A				X			273		
Wing Only	Nacelles	X			X					X			X	X	A	A	A				X			274	Includes wing bending moment data	
Wing- Fuselage (NW, 7)	Nacelles	X	X	X					X		X	X	X	X	A, S, A, S, S	S	S	S	S	S	X			276		
Delta Wing- Fuselage (NW, 60)	DAC store shapes	X	X	X						X				X	A	A	A				X			277		
Wing- Fuselage (NW, 22)	Nacelles	X	X	X	X					X		X	X		A	A	A				X			278		
Wing- Fuselage (NW, 4)	DAC shape store air body	X	X	X						X				X	A	A	A				X			279		

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CAPRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							DATA REFERENCE NUMBER	REMARKS				
		FUSELAGE	WING	PYLON	TANGENT	SPI- SUPPORTS	CONFORMAL	WING-TIP	NEW	TR	CIRCLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	AIRLOADS DATA TYPE						
																						WIND TUNNEL			INFLIGHT	THEORETICAL		
Delta Wing Fuselage (NW, 60)	Nacelles	X								X			X				A	A	A				X			250	Includes flow sketches	
Wing- Fuselage (NW, 52)	Nacelles	X	X							X							X	A	A	A				X			251	
Wing- Fuselage (NW, 46)	Nacelles	X		X					X				X				X	A							X		252	Rocket-launched models
Delta Wing Fuselage (NW, 53)	Sparrow and other Missiles	X	X							X			X				X	A	A	A				X	*		253	
Wing- Fuselage (NW, 46)	Nacelles	X							X				X				X	X	X	A					X		254	Rocket-launched models
Wing- Fuselage (NW, 52)	Nacelles	X	X	X						X							X	A	A	A				X			256	
Wing- Fuselage (NW, 46)	Nacelles	X							X				X				X	X	X	A					X		257	Rocket-launched models
Wing- Fuselage (NW, 46)	Nacelles	X	X	X						X							X	X	A	A	A			X			258	Includes nacelle pressure data
Wing- Fuselage (NW, 46)	Nacelles	X							X				X				X	X	X	A					X		259	Rocket-launched models
Wing- Fuselage (NW, 46)	Nacelles	X	X	X						X							X	X	X	A					X		261	Rocket-launched models
Wing- Fuselage (NW, 46)	Nacelles	X		X									X				X	X	X	A					X		262	Rocket-launched models
Wing- Fuselage (NW, 46)	RACAL D'A-series bolus	X	X										X				X	X	A	A	A						264	

TABLE A-14: MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing sweep - deg., position, fuselage)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE		DATA REFERENCE NUMBER	REMARKS			
		FUSELAGE	WING	PYLON	TRANS- PARENT	SPAL- SUN- PROTECTED	CONFORMAL	WING-TIP	HER	TER	SINGLE	OTHER	SUBSONIC	TRANS- SONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL			INFLIGHT	THEORETICAL	
Two wing bodies (NW- 60, 10)	External store	X			X					X					X	A	A	A	A	A		X			295		
Wing- fuselage (NW-34)	Wing tanks	X			X					X			X			A							X			300	Rocket-launched models
Wing- fuselage (NW-34)	Wing tanks	X	X							X			X	X	X	A							X			304	Pocket-launched models
Wing- fuselage (NW-8)	External store	X	X							X			X	X		A						X				305	
F4U-1 (IM-4)	Lockheed tank, universal tank	X	X							X			X			A	A	A				X				306	Includes pressures on wing, pylon and store
Wing- fuselage (IM-38)	5-in. rockets and 193-gal fuel tank	X	X							X	X		X	X		A	A	A				X				307	
X-15 (NW-37)	Wing tip pod	X								X					X											308	Includes limit airloads on pod to M = 4.4
Wing- fuselage (NW-49)	Generalized store	X	X							X	X		X			S	S	S	S	S		X			313	Includes flow field characteristics, store pressures and isolated store data	
Hypothetical Bomber (NW, 45)	T-63, EIA-C, B-4A, P12, T-62, E-11	X	X	X						X			X	X	S, P A	S	S	S	S	S		X			6		
Hypothetical Bomber (NW, 45)	DAS shape (various)	X	X							X				X		A	A	A				X			8	Subsonic data contained in other references.	
Hypothetical Bomber (NW, 45)	DAS shape (various), AN-M66, others	X	X		X					X			X	X		A	A	A				X			10		

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CAPRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE	REMARKS	
		WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	PER	TIR	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL			
General	All Types		X							X		X	X	X	X	X	X	X						X	418	Dynamic model for separation in pitch plane.
Generalized Wing Body	Various	X	X							X		X	X	X	S							X			457	Good summary of NASA data
Wing Body (NM, 45)	Various	X	X							X	X	X			SS	P, S, P, S						X			446	
Wing Body (NM, 45)	Various	X	X							X	X	X				P, SS, S, P, S						X			448	
VTAX/FC Model (RM, 45, 72.5)	MC-82SE, Sparrow, Phoenix	X	X	X	X					X		X	X			A						X			454	
Beech Model 1089	HAST	X	X							X		X				A	A	A	A	A	A	X			470	
B-52 (RM, 37)	BLU-1, MK-82, M117	X	X							X			X	X		A							X		475	
B-52 (RM, 37)	SRAM	X	X										X	X		A	A						X		476	
B-52 (RM, 37)	SRAM	X	X										X	X		A	A	A							477	
B-52 (RM, 37)	SRAM	X	X										X	X		A	A	A							478	
B-52 (RM, 37)	SRAM	X	X										X	X		A	A	A							479	
B-52 (RM, 37)	SRAM	X	X										X	X		S	S	S	S	S	S	X			527	Separation Data
B-1 (LM, 65)	AGM-69A												X				S	S	S	S	S	S	X		543	

TABLE A-14. MISCELLANEOUS AIRCRAFT-STORE DATA INDEX (Concluded)

AIRCRAFT (Wing-Fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE					MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TAIL/VENT	SEAT SUBMERGED	CONFORMAL	WING-TIP	VEE	TEP	CIRCLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL				
BQM-34B (NM, 45)	MK-82 Maverick Hobo		X	X						X			X			X	X	X	X	X	X	X				559		
P-3A (LM' O)	AGM-12B		X	X						X																563	No Force Data	
Intercep- tor (NM, 57.5)	General - Missiles		X	X						X						X	A	A	A	A	A	X				565		
Intercep- tor (NM 58.5, 46.5)	General - Missiles		X	X						X						X	A	A	A	A	A	X				570		

TABLE A-15. WING-STORES (WITHOUT FUSELAGE) DATA INDEX

AIRCRAFT (wing-fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE						STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS		
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SURFACED	CONFORMAL	WING-TIP	MER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL			INFLIGHT	THEORETICAL
Straight wing	DAS shape		X	X						X		X	X	X	X	S, P, P, W	S, P, P, W	S, P, P, W				X			1	Includes W, P, and S pressure distributions
Straight wing	DAS shape: AN-M66 GP Bomb		X	X						X		X	X	X	X	S, P, P, W	S, P, P, W	S, P, P, W				X			2	Includes W, P, and S pressure distributions
40° Swept wing	RAE Fuel Tank (F.R. = 6.0)		X	X						X		X					S	S	S	S		X			5	
Flat plate	NR-83LDP, Aero 7D pod	X	X			X				X		X	X	X	X	A						X			63	
(See remarks)	Minimum drag shape		X	X						X		X		X	X	PS						X		X	103	Two wing types: unswept airfoil and a body of revolution
Straight and 40° wings	100-gal standard tank	X	X							X		X		X				S	S			X		X	105	Includes empirical method for estimating C_{Dn} and C_{Di} on strut tanks. Also, isolated tank data.
47° wing	Nacelles		X	X						X		X	X	X	X	A	A	A				X			271	
47° wing	Nacelles		X	X				X		X		X	X	X	X	A	A	A				X			275	
54° wing	Wing tip tanks		X					X		X		X	X	X	X	A	A	A				X			294	
37° wing	Nacelles		X	X						X		X	X	X	X	A	A	A				X			298	Includes pressure distribution.
Straight wing	Wing tip tanks		X							X		X	X	X	X	A	A	A				X			302	
45° Wing	Various Pocket Launcher Designs		X	X						X		X	X	X	X							X			444	

TABLE A-16. GENERAL REPORTS-STORE DATA INDEX (BIBLIOGRAPHIES, PREDICTION METHODS, ETC.) (Continued)

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE					STORE RANGE		STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TAVERNET	SEMI-SUBMERGED	CONFORMAL	WING-TIP	MER	TER	SINGLE	OTHER	SUBSONIC	TRANS-SONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	IMPLICIT	THEORETICAL		
Various	(See Remarks)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	106	Effects of stores on general aircraft flying qualities. Excellent bibliography.
Various	Bibliography (See remarks)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	111	NASA and MACA bibliography on carriage and release of external stores.
Various	(See Remarks)		X	X						X					X							X	X	X	112	Numerical method for evaluating Macelle-wing interference.
Various	(See Remarks)	X	X								Macelles				X								X		118	Describes current methods for predicting lift-induced drag.
Various	Bibliography (See remarks)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	119	NASA and MACA bibliography on store drag, interference, etc. Includes general conclusions.
Various	Aircraft-Store Symposium technical papers (See remarks)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	141	Extensive compilation of technical papers on store-aircraft interference, airloads, etc.
Various	Bibliography (See remarks)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	148	APPTC bibliography of technical publications (1951-1964); Addendum (1965-1968).
Various	(See Remarks)		X	X						X				X	X	X						X	X	X	150	General discussion of parameters influencing store aircraft drag. Includes bibliography.
Various	Sparrow, MC-82 SELD	X			X					X		X	X	X	X	X	X					X			151	Broad discussion of store drag on high speed aircraft.
Various	(See remarks)	X	X	X						X		X	X	X	X	X	X	S _{PS, A, S}	S			X		X	156	Describes various airloads and flow field prediction methods. Includes bibliography (1946 to 1962).
Various	Bibliography (See remarks)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	160	DTC bibliography on "External Stores" (prior to 1965).
Various	(See remarks)		X	X						X		X					S	S	S	S	S	X	X	X	168	Empirical method for predicting single, wing pylon mounted stores.
Various	(See remarks)		X	X						X		X		X				PS	PS					X	191	Empirical method for predicting wing pylon store installation airloads (C _y and C _n)

TABLE A-16. GENERAL REPORTS-STORE DATA INDEX (BIBLIOGRAPHIES, PREDICTION METHODS, ETC.) (Continued)

AIRCRAFT (Wing-fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION								CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE				DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	HER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAW	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL				
Various	Store airloads prediction method summary (see remarks)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	192	Summary of analytical, experimental and empirical techniques for pre- diction external store installation airloads.		
—	(See remarks)									X				X				X							225	Prediction method for single store side force		
Various	(See remarks)	X	X	X	X		X			X	Multiple	X	X	X									X		260	Results of feasibility study for advanced suspension systems.		
Various	(See remarks)	X	X	X	X	X	X	X	X	X			X		X	X	X	X	X				X		406	Describes various theoretical methods for predicting aircraft-store interference (Bibliography)		
Various	Incremental neutral point prediction method (Air- craft Store Compatibility Symposium Proceedings (Dec 1971)		X	X					X	X	X		X	X		X	X	X					X		407	Analytical method for predicting air- craft incremental neutral point effects due to addition of external stores		
Various	Incremental side force and yawing moment prediction method	X	X	X					X	X	X		X					X	X				X		408	Theoretical method for predicting airloads on store installations		
Various	Incremental side force prediction method		X	X						X		X	X	X				X		X		X		X	409	Empirical method for predicting airloads on store/store installation		
Various	(See remarks)		X	X								X			X		X				X		X		401	Theoretical method for predicting load distributions on wing-pylon combina- tions.		
Various	(See remarks)		X	X						X		X		X		X	X	X	X				X		410	Theoretical method for predicting load distributions and interference airloads due to pylon mounted stores (General Dynamics/NASA).		

TABLE A-16. GENERAL REPORTS-STORE DATA INDEX (BIBLIOGRAPHIES, PREDICTION METHODS, ETC.) (Continued)

AIRCRAFT (Wing-fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT ATTRIBUTES DATA							ATTRIBUTES DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TAVANT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	NER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
Various	(See remarks)	X	X	X					X	X	X		X	X	X	X	X	X	X					X	411	Analytical method for predicting interference effects between adjacent bodies. (Uses cross-flow corrections method - Auburn University).
Various	(See remarks)	X	X	X						X			X	X	X	X	X	X	X					X	412	Theoretical method for defining mutual interference effects of multiple weapons (Auburn Univ.)
Various	(See remarks)	X	X	X							X		X		X									X	414	Theoretical method for predicting store-aircraft aerodynamic interference loadings (General Dynamics, Part III - Programmers Manual)
Various	(See remarks)	X	X	X						X			X											X	415	Primarily an early effort for predicting store trajectories using input captive conditions, two-dimensional, X-Z plane only. (G.V.R. Rao & Associates - NERDC)
Various	(See remarks)	X	X	X							X		X						P, S, PS			X		X	452	Theoretical prediction technique for side force and yawing moment on stores and pylon installation.
Various	(See remarks)	X	X	X							X			X	X	S	S	S	S	S	S	X		X	449	Theoretical prediction technique for store interference loadings.
Various	(See remarks)	X	X	X					X	X	X		X	X		S	S	S	S	S	S	X	X		432	Store trajectory prediction technique using captive loads.
Various	(See remarks)	X	X	X							X		X			S	S	S	S	S	S	X		X	421	Theoretical prediction technique for store interference effects.
Various	(See remarks)	X	X	X							X				X	S	S	S	S	S	S	X		X	456	Theoretical prediction technique for store interference loadings.
Various	(See remarks)	X	X	X					X	X	X		X	X	X	S	S	S	S	S	S				472	Empirical technique to calculate captive loads.

TABLE A-16. GENERAL REPORTS-STORE DATA INDEX (BIBLIOGRAPHIES, PREDICTION METHODS, ETC.) (Concluded)

AIRCRAFT (Wing-Fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION										CARRIAGE RACK TYPE				MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SPOT- SURFACED	CONFORMAL	WING-TIP	HEA	TEE	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	FRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL						
Various	(See Remarks)	X	X	X	X	X	X	X	X	X		X	X	X	X								X		489	Survey of Analytical Calculations of Store/Aircraft Interference Flow Fields				
Various	(See Remarks)	X	X	X	X	X	X	X	X	X		X	X	X	X						X				514	A Review of Methods to Measure Captive Loads on Stores				
F-4C	M17		X	X						X				X							X				518	Uses Flow Angularity Technique to Predict Store Trajectories				
Various	(See Remarks)		X	X						X		X										X			550	Uses Captive Loads to Predict Store Trajectory to Determine Separation Criteria				
Wing	Various		X	X						X		X	X	X	X		X	X			X				557	Gives Wing Pressure Distributions for Various Shapes & Locations				
---	Body of Revolution with Conical Nose														X	X						X			561					
Various	(See Remarks)		X	X								X										X			581	Gives Separation Trajectory Based on Loads by Use of Laplace Transform				
Various	(See Remarks)														S	S	S	S	S	S	X				587	Prediction Techniques for External Store Airloads - Interim Report				

TABLE A-17. ISOLATED STORES, RACKS, AND PYLONS DATA INDEX

AIRCRAFT (Wing-Fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE RACK TYPE				STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA-REFERENCE NUMBER	REMARKS				
		FUSELAGE	WING	PYLON	TARGET	SMI- SHAPED	CONFORMAL	WING-TIP	NEB	TEP	CIRCLE	OTHER	MACH RANGE			DRAG	LIFT	PITCH	SIDE	YAW			ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL
													SUBSONIC	TRANSONIC	SUPERSONIC											
--	DAG Shape									X			X	X	X	S	S	S	S	S	S	X			1	Also includes pressure distributions.
--	DAG Shape, AN-M66 JF Bomb									X			X	X	X	S						X			2	Also includes pressure distributions.
--	Streamlined and Bluff bombs									X						S	S	S	S	S	S	X			21	
--	Sidewinder 1C									X			X	X	X	S	S	S	S	S	S	X			24	
--	Ballpup Trainer Missile									X			X	X	X	S	S	S	S	S	S	X			27	
--	AGM-12E Standoff Cluster (Mod. Ballpup B)									X			X	X	X	S	S	S	S	S	S	X			93	
--	MR-81 and MR-82 SEID									X			X	X	X	S	S	S	S	S	S	X			32	
--	ML17 Bomb									X			X	X	X	S	S	S	S	S	S	X			36	
--	Hard Structure Munition									X			X	X	X	S	S	S	S	S	S	X			38, 52, 77	
--	MBF, XBF, TER and UMBR with or without MR-81 and MR-82 LD/SE								X	X	X		X	X	X	R, RS						X			40	
--	Air-to-Surface Missile									X			X	X	X	S	S	S	S	S	S	X			53	
--	ASM Missile									X			X	X	X	S	S	S	S	S	S	X			61	
--	MR-83 LDGP, Aero 7D Pod									X			X	X	X	S	S	S	S	S	S	X			63	
--	Cubes (Conformal Shapes)									X			X	X	X	S	S	S	S	S	S	X			64	
--	BUU-58/B									X			X	X	X	S						X			67	
--	Rectangular Bodies (Conformal Shapes)									X			X	X	X	S	S	S	S	S	S	X			68	
--	CBU-24 Dispenser									X			X	X	X	S						X			72	
--	MR-82 LDGP									X			X	X	X	S	S	S	S	S	S	X			74	
--	ML17 SE and LD									X			X	X	X	S	S	S	S	S	S	X			78	
--	ML17 LDGP									X			X	X	X	S	S	S	S	S	S	X			79	
--	MR-82 SEID									X			X	X	X	S						X			80	
--	Sidewinder									X			X	X	X							X			82	DIC Bibliography

TABLE A-17. ISOLATED STORES, RACKS, AND PYLONS DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION							CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA							AIRLOADS DATA TYPE			DATA REFERENCE	REMARKS
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	WING	TER	SINGLE	OTHER	SUBSONIC	TRANS- SONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFILIGHT	THEORETICAL		
--	NER-9, MER-100 and MER-100A with or without MK-82 LD, MK-82 SE, ML17, SUU-13A, etc.		X							X		MAU-12/A LODE 30A		X	X	X						X			83, 84	Full scale wind tunnel data.
--	HU-58										X		X	X	X	S							X		96	
--	Pylon + Sparrow			X							X		X	X	X	PS						X			102	
--	Strut Shapes			X							X		X			P						X		X	107	Plot and drag of various strut shapes.
--	Various bodies of revolution (finned)										X		X	X	X	S						X			108	Collection of C_D data on various bodies.
--	Cylinders										X		X	X	X	S						X			109	Skin-friction drag data.
--	Finned bodies of revolution (FR = 8, 10 and 12)										X		X	X		S							X		126	
--	Rectangular solid bodies (FR = 1, 2 and 3)										X		X	X	X	S	S	S				X			132	
--	150-Gal DAS Tank										X		X	X	X	S	S	S				X			143	
--	SRAM (AGM-69A)										X		X	X	X	S	S	S				X			161	
--	ML17 bomb with MAU-103A/B and M131A1 (Mod.) fins										X		X	X	X	S	S	S				X			162	
--	Sparrow, wingless missiles										X		X	X	X	S	S	S				X			204	
--	Assorted bomb shapes										X		X	X	X	S							X		222	
--	DAC stores, MDC store, MACA 65A series, circular arc series stores										X		X	X	X	S							X		246	
--	Three bomb shapes with or without fins										X					S	S	S							268	
--	Generalized store shapes										X		X	X	X	S							X		285	Data is pressure distribution.
--	Round-nosed stores										X		X	X	X	S							X		290	

TABLE A-17. ISOLATED STORES, RACKS, AND PYLONS DATA INDEX (Continued)

AIRCRAFT (Wing-Fuselage position, wing sweep - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION								CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON and/or AIRCRAFT AIRLOADS DATA								DATA REFERENCE	REMARKS	
		FUSELAGE	WING	PYLON	TANGENT	SEMI- SUBMERGED	CONFORMAL	WING-TIP	MER	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	DRAG	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT			THEORETICAL
--	Two bodies with fins									X			X	X	X	S							X		296	
--	Parabolic body with fins									X				X	X	S							X		297	
--	Parabolic body with fins									X				X	X	S	S						X		299	Includes base pressure data.
--	Parabolic body with fins									X			X	X	X	S							X		303	
--	M117 bomb with 7 fin combinations									X			X	X	X	S	S						X		309	
--	Tactical fighter dispenser with 8 fin combinations									X			X	X	X	S	S	S	S	S	S				310	
--	BUU-52 bomb with 4 fin combinations									X			X	X	X	S						X			311	
--	MK-76 Practice Bomb									X			X	X	X	X	X								323	
--	MK-83 Low Drag Bomb									X			X	X	X	X	X	X	X	X	X				324	
--	MK-82 Standard and Extex Snake I									X			X	X	X	X	X	X	X	X	X				326	
--	M 82 SELL									X			X	X	X	X	X	X				X			327	
--	M 32 IDGP with Modified Stabilizers									X			X	X	X	X	X								328	
--	M823 Store									X			X	X											338	
--	Navy Low Drag Bomb									X			X	X	X	X	X	X	X	X	X				339	ac range = 0° to 70°
--	BUU-12/B, BUU-38B, AGM-65A									X			X	X	X										340	
--	Valley, Large Scale Valley, AGM-76/A									X			X	X	X	X	X	X				X			343	
--	Sidewinder IIIC									X			X	X	X	X	X	X	X	X	X				347	
--	B-58 External Store									X			X	X	X	X	X	X	X	X	X				353	Also details pod and strut geometry.
--	M117 Bomb									X	X		X	X	X	X	X	X	X	X	X	X			413	Freestream and TER mounted Bomb.

TABLE A-17. ISOLATED STORES, RACKS, AND PYLONS DATA INDEX (Continued)

AIRCRAFT (Wing-fuselage position - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION								CARRIAGE RACK TYPE			MACH RANGE			STORE, RACK, PYLON AND/OR AIRCRAFT AIRLOADS DATA							DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANDEM	SDMI- SUBMERGED	CONFORMAL	WING-TIP	WING	TER	SINGLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	LIFT	PITCH	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
--	Adv. Sparrow										X				X	X	X	X	X	X			416	$\alpha = -4 \rightarrow 40^\circ$, $\phi = 0 \rightarrow 15^\circ$ $M = 1.5 \rightarrow 4.6$
--	ID Aircraft Store										X		X	X		X	X			X			463	Various forebody shapes
--	ML17 with Folding Fins										X		X	X		X	X			X			460	
--	SUU-51/B										X		X	X		X	X			X			439	
--	Various Rocket Launcher Designs										X		X	X		X	X			X			444	
--	MLU-58/B										X		X	X		X					X		425	
--	MC-84 with 14-inch Suspension Adapter										X		X	X		X					X		426	
--	MC-82SE										X		X	X		X					X		427	
--	CMU-60/A										X		X	X		X	X	X	X	X			437	
--	SUU-45A										X		X	X		X	X	X	X	X			438	
--	FMST										X		X	X		X	X	X	X	X			471	
--	FMST										X		X	X		X	X	X	X	X			473	
--	TFD-10 Bay Dispenser												X	X		X	X	X	X	X			592	
--	Four Bomblet Types										X		X	X		X	X	X	X	X			494	
--	Various Bluff Bodies										X		X	X		X	X						499	
--	Anti-Tank Missile										X		X	X		X	X		X	X			501	
--	Anti-Tank Missile										X		X	X		X	X		X	X			503	
--	ASP Munition										X		X	X		X	X			X			511	

TABLE A-17. ISOLATED STORES, RACKS, AND PYLONS DATA INDEX (Concluded)

AIRCRAFT (Wing-fuselage position, wing type - deg.)	STORE IDENTIFICATION	STORE MOUNTING LOCATION						CARRIAGE BACK TYPE				MACH RANGE			STORE, RACK, Pylon and/or AIRCRAFT AIRLOADS DATA						AIRLOADS DATA TYPE			DATA REFERENCE NUMBER	REMARKS
		FUSELAGE	WING	PYLON	TANKMENT	SEMI-SUBMERGED	CONFORMAL	WING-TIP	WTR	TER	SIMPLE	OTHER	SUBSONIC	TRANSONIC	SUPERSONIC	LIFT	PITCH	SIDE	YAW	ROLL	WIND TUNNEL	INFLIGHT	THEORETICAL		
--	Various Pins on an Ogive Cylinder										X		X	X		X	X	X	X	X	X			515	
--	Pave Rock Rocket										X		X	X		X	X				X			516	
--	Various										X		X	X	X	X							X	519	Empirical Technique for Predicting Aerodynamic Coefficients
--	Rem Air Decelerator										X		X	X		X	X				X			522	
--	Various Bluff Bodies										X		X	X	X	X	X				X			525	
--	DQM-34P Aerial Target										X		X	X	X	X	X	X	X	X	X			533	
--	SUN-7A/A										X		X	X		X	X				X			535	
--	Various Pins on an Ogive Cylinder										X			X		X	X				X			548	
--	Surface Attack Guided Missile (SAUGM)										X			X		X	X	X	X	X	X			549	
--	Pave Storm I and II										X		X	X		X	X	X	X	X	X			551	
--	MC-20 Laser Guided Dispenser Munition										X		X	X		X	X	X	X	X	X			552	
--	SUN-51 Laser Guided Dispenser Munition										X		X	X		X	X	X	X	X	X			553	
--	Stubby Hobo Munition										X		X	X		X	X	X	X	X	X			554	Also Includes Some Data for Computer and Flight Test Separation Analysis
--	Pave Storm I										X		X	X		X	X	X	X	X	X			575	
--	ML17									X			X	X		X	X	X	X	X	X			583	Interference of ML17 and TER
--	Rockeye II												X			X	X	X	X	X	X			590	Static Stability Tests

BIBLIOGRAPHY

1. R. W. Bratt, et al., Summary of Wind Tunnel Tests of the 20 Per Cent Scale External Store Model, DAC ES 20948, Douglas Aircraft Company, Inc., October 20, 1947.
2. T. C. Muse and R. W. Bratt, Summary of High Speed Wind-Tunnel Tests of a Douglas Aircraft Store Shape and a 2000-Pound G. P. AN-M66 Bomb, DAC ES 21150, Douglas Aircraft Company, Inc., June 1948.
3. S. J. Colby and E. A. Ward, Presentation of the Critical Inertial and Aerodynamic Loads and Moments Acting on the Sparrow Missiles when Carried and Launched from the F2H-5, F3H-1, F4D-1, F7U-3 and F10-F Airplanes, DAC SM-14676, Douglas Aircraft Company, Inc., February 1953.
4. E. A. Ward, Presentation of the Critical Inertial and Aerodynamic Loads and Moments Acting on the Sparrow Missiles when Carried and Launched from the F3H-5, F3H-1, F4D-1, F7U-3, and F10-F Airplanes, DAC SM-14676A, Douglas Aircraft Company, Inc., June 1953.
5. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
6. Wind Tunnel Investigation of Aerodynamic Loads on Stores in the Presence of a Bomb Bay and Mounted Externally, DAC ES 17901, Douglas Aircraft Company, Inc., April 1955.
7. E. T. Burgan, Wind Tunnel Tests to Determine the Forces and Moments on Two 0.17-Scale Model 1000-Pound Low-Drag Bombs when Mounted below the Port Wing of a 0.20-Scale Model F9F-2 Airplane, DTMB Aero 861, AD 352 33, Naval Ships Research and Development Center, April 1954.
8. R. W. Hovey, Summary of Wind Tunnel Tests of a Swept Wing Hypothetical Bomber with Douglas External Stores at M = 1.2, DAC ES 16047, Douglas Aircraft Company, Inc., March 1952.
9. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.

10. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
11. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
12. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
13. S. A. Murtaugh, Bomb Carriage, Release, and Separation Studies, Report No. GC-910-C-1, Cornell Aeronautical Laboratory, Inc., May 1954.
14. S. J. Deitchman, Bomb Carriage, Release, and Separation Studies, Report GC-910-C-2, Cornell Aeronautical Laboratory, Inc., June 1954.
15. J. B. Kane, Bomb Carriage, Release and Separation Studies (Preliminary Report on Transonic and Supersonic Wind Tunnel Tests and Data Reduction), Report No. GC-910-C-11, Cornell Aeronautical Laboratory, Inc., December 1955.
16. R. J. Trudell, Load Measurements on a T-54 Bomb Mounted under an F-86F Wing in Full Scale Flight, Report No. GC-910-C-7, Cornell Aeronautical Laboratory, Inc., January 1956.
17. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
18. H. D. Froning, A Study of the Aerodynamic Phenomena Arising from the External Carriage of Air-to-Air Missiles, Report No. SM-27101, AD 107 947, Douglas Aircraft Company, Inc., August 1956.
19. D. B. Schoelerman and J. A. Brassard, Model F8U-3 Summary of Series 1 and 2 Langley Wind Tunnel Tests on .05 Scale F8U-3 Force Model, CVA Report 10715, Chance Vought Aircraft, Inc., May 1957.
20. R. W. Luce, Jr., and E. J. Velton, Investigation of the Aerodynamic Interference of a Launching Aircraft on the Sparrow II Missile, DAC SM 14383, Douglas Aircraft Company, Inc., October 1952.

21. Studies of Bomb Carriage, Release and Trajectory Characteristics - Wind Tunnel Force Tests at Supersonic Speeds, Report No. GC-910-C-18, Cornell Aeronautical Laboratory, Inc., June 1957.
22. Aerodynamic Data for Preliminary Estimations, CV Report E8R-11564, Chance Vought Aircraft, Inc., May 1958.
23. Transonic Wind Tunnel Tests on a 7 Per Cent Scale Model of the F-100A Fighter Bomber with External Stores, WADC TN 56-278, AD 130 816, Wright Air Development Center, 1957.
24. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
25. L. D. Smith, Determination of Air Dynamic Forces on Externally Mounted Stores (A-7A/B/E), Report No. 2-53310/5R-1995, LTV - Vought Aeronautics Division, August 1965.
26. J. A. Flechtner, Static Stability Test on a 0.042 Scale F8U-2N Model to Obtain the Aerodynamic Effects of Canopies and Stores in the Mach Number Range of 0.6 to 1.6, HSWT - Test 47, CVA AER-EIR-13468, Chance Vought Corp. / Vought Aeronautics, 31 July 1961.
27. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
28. C. S. Swinney, Incremental Lift and Drag of an External Aircraft Store - Phase II (50° Sweep), DTMB Test Report AL 27, AD 481 906, David Taylor Model Basin, March 1966.
29. P. T. Eaton and C. S. Swinney, The Effects of Store Location, Store Incidence, and Wing Leading-Edge Geometry on the Incremental Lift and Drag of a Typical Missile-Type External Store, DTMB Report 2224, AD 651 667, David Taylor Model Basin, September 1966.
30. J. F. Talbot and J. Ottensmeyer, Geometric Effects on Fuselage Mounted Store Drag, NSRDC AERO 1141 (Report C-2622), AD 385 971L, Naval Ships Research and Development Center, September 1967.
31. R. H. Bleikamp, Supersonic Multiple Bomb Rack (Design Study), AFATL-TR-67-3, AD 806 937, Air Force Armament Laboratory, February 1967.

32. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
33. Stores Separation under Subsonic Conditions Phase III, Part II Downwash and Sidewash Function Tables for an A-6A (A2F-1) Type of Aircraft, AD 334 581, Grumman Aircraft Engineering Corp. , December 1962.
34. D. E. Knutsen, Determination of Captive Flight Loads and Separation Trajectories of Airborne Stores, NWC TP 4328, AD 837 073, Naval Weapons Center, June 1968.
35. J. O. Ottensmeyer and D. W. Lacey, A Comparison of Drag Increments due to the Addition of Various Stores on Three Different Aircraft, NSRDC AL-41 (AERO Test C-230), AD 823 498, U. S. Naval Ships Research and Development Center, September 1967.
36. E. W. Falkowski, Transonic Aerodynamic Characteristics of a Full Scale M117 Bomb with Three Fin Configurations, Technical Report 3785, AD 841 577, Picatinny Arsenal, October 1968.
37. D. W. Lacey, Prediction of Incremental Aircraft Drag due to Externally Carried Weapons, NSRDC Aero 1155 (Report 2922), Naval Ships Research and Development Center, September 1969.
38. R. F. Austin, Comparison of Force Test Results from Several Transonic Wind Tunnel Tests of the Hard Structure Munition Missile, AEDC-TR-68-86, AD 830 332, Arnold Engineering and Development Center, April 1968.
39. R. W. Hemphill, Flight Investigation of External Store Shapes for Transonic Speeds, WADC TN 58-31, AD 142 320, Wright Air Development Center, January 1958.
40. E. F. Kuklewicz, An Investigation of Incremental Drag and Vibration Characteristics of MBR, TER, MER, and UMBR Bomb Racks, DTMB AL-C-19, David Taylor Model Basin, June 1965.
41. P. Marsden and A. B. Haines, Measurements at Transonic Speeds of the Side Force and Yawing Moment on Various Store Arrangements Mounted beneath a 45° Swept Wing-Fuselage Model, C. P. 995, AD 822 862, Ministry of Technology, Aeronautical Research Council, June 1964.
42. L. G. Van Pelt, Captain USAF, "Affect of External Munitions on Aircraft Stability and Control", Technical Review - Vol. 9 (Paper No. 4) 1969 Report - The Society of Experimental Test Pilots 13th Symposium Proceedings, 25-26 September 1969.

43. Test Results on Drag of External Stores, Search 11289, NASA Scientific and Technical Information Facility, March 1970.
44. Jonah Ottensoser, Some Effects of Longitudinal and Vertical Store Position Variation on a 0.10-Scale F-8 Aircraft Model, Test Report AL 47, AD 832 954, Naval Ship Research and Development Center, March 1968.
45. R. Sadler, External Stores Separation under Subsonic Conditions - Phase V, Instrumented MK 83 Fly-around Tests, Memo No. 432, Northwestern University - Aerial Measurements Laboratory, June 1965.
46. Peter S. Montana, Incremental Drag of Six Standard Stores on a Generalized Wing-Body Model, Test Report AL-49, Naval Ship Research and Development Center, May 1968.
47. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
48. P. T. Eaton, Incremental Lift and Drag of an External Aircraft Store - Phase I, DTMB AL 20, David Taylor Model Basin, July 1965.
49. Russell G. Cleveland and David W. Lacey, Incremental Drag of Several External Stores Carried on a 0.10-Scale F-8 Aircraft Model, Test Report AL-52, Naval Ship Research and Development Center, September 1968.
50. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
51. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
52. W. W. Brewer, et al., Hard-Structures Munition - Phase II (U), Volume III - Delivery Vehicle System, AFATL-TR-68-67, Air Force Armament Laboratory, May 1968.
53. Bernard F. Saffell, Jr., Preliminary Aerodynamic Study of a Large Air-to-Surface Missile, Report 3035 (Aero Report 1157), Nval Ship Research and Development Center, March 1969.

54. David W. Lacey, Effect of Store Nose Shape on the Incremental Drag of Installed Missiles, Test Report AL 34, AD 819 709, Naval Ship Research and Development Center, May 1967.
55. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
56. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
57. James G. Shipe, The Use of Boattails to Reduce the Drag of Stores Installed on an Aircraft, Test Report AL 35, DTMB Aero Test C-198, David Taylor Model Basin, March 1967.
58. Peter S. Montana and David W. Lacey, Changes in Longitudinal Characteristics Caused by the External Carriage of the Walleye Missiles on Four 10-Percent Scale Aircraft Models, Test Report AL 109, Naval Ship Research and Development Center, February 1969.
59. Aerodynamic Effects of External Stores, A Report Bibliography for LTV Aerospace Corp. (1964 to Present) - Search 11883, NASA Scientific and Technical Information Facility, May 1970.
60. David W. Lacey and Peter T. Eaton, Some Effects of Aircraft Geometry on the Incremental Drag Characteristics of Mark 82 Bombs, Test Report AL 33, AD 656 059, David Taylor Model Basin, March 1967.
61. William A. Boehly, Aerodynamic Characteristics of an Air-to-Surface Missile, Report 2818, Naval Ship Research and Development Center, April 1968.
62. R. L. Schaeffer and J. M. Durkin, Low Drag Packageable Ordnance Study, Technical Note TN AL-33, U. S. Naval Ships Research and Development Center, May 1967.
63. R. J. Furey and C. J. Martin, A Study of Captive Flight Drag and Separation Characteristics of Half-Bomb and Half-Pod Store Configurations, NSRDC TN AL-53, Naval Ship Research and Development Center, September 1967.
64. S. Loezos, Static Stability Characteristics of Various Configurations of a Cubical Store, NSRDC TN AL-61, Naval Ship Research and Development Center, February 1968.

65. J. C. Martin, The Captive Flight Drag of a Series of Conformally Packaged Weapon Systems, NSRDC Report 3321, Naval Ship Research and Development Center, January 1970.
66. E. A. Price, Jr., Documentation of Wind Tunnel Data from a 1/12 Scale F-111 A/D - Maverick Rigid Loads Test, AEDC-TR-69-61, Arnold Engineering and Development Center, April 1969.
67. N. R. Poulsen, Contractor Support Test of BLU-58/B Supersonic Bomb, ADTC-TR-69-169, AD 862 487, Armament Development and Test Center, November 1969.
68. E. Saxey II, F/RF-4C Category II Drag Data, AFFTC-TR-66-28, Air Force Flight Test Center, November 1966.
69. G. S. Pick, Aerodynamic Characteristics of Rectangular Solid Bodies of Various Fineness Ratios at Mach Numbers of 0.74 and 1.88, NSRDC Test Report AL 40, Naval Ship Research and Development Center, July 1967.
70. Aerodynamic Effect of External Stores, Parts 1 and 2, a Report Bibliography for LTV Aerospace Corp. (1962 to Present) - Search No. 12901 (Parts I and II), NASA Scientific and Technical Information Facility, August 1970.
71. C. F. Reid, Transonic Wind Tunnel Tests of a 1/16th Scale Model of the Grumman EA-6B Aircraft with External Stores (Vol. III of III), Report AA-2180-W-3, AD 821 703, Cornell Aeronautical Laboratory, Inc., February-March 1966.
72. E. G. Alee, Jr., Static Stability and Separation Characteristics of the CBU-24 Dispenser Fitted with Various Tail-Fin Configurations at Mach Numbers from 0.50 to 1.10, AEDC-TR-70-37, AD 865 412, Arnold Engineering and Development Center, February 1970.
73. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
74. F. J. Regan, et al., Static Wind-Tunnel Tests of the MK82 Free-Fall Store with Two Modified Stabilizers, NOLTR 69-217, AD 864 357, Naval Ordnance Laboratory, December 1969.
75. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.

76. V. Tamburello and E. Burgan, Exploratory Wind Tunnel Tests of External Stores Mounted in Various Locations on the Wing of a 0.17-Scale Model Jet-Fighter Type Airplane, Report C-453 (Aero Report 806), AD 68 854, David Taylor Model Basin, September 1951.
77. T. M. Perkins and T. O. Shadow, Captive Trajectory Tests of a 0.075-Scale, Hard-Structure Munitions Model at Transonic Mach Numbers, AEDC-TR-68-168, AD 839 109, Arnold Engineering and Development Center, September 1968.
78. D. E. A. Reichenau, Static Stability Tests of the M117 Bomb with an Afterbody Modified to Incorporate a Retardation System at Mach Numbers from 0.6 to 1.4, AEDC-TR-68-199, AD 839 422, Arnold Engineering and Development Center, September 1968.
79. R. E. Davis, Flow Field Characteristics beneath the F-4C Aircraft at Mach Numbers 0.50 to 0.85, AEDC-TR-70-8, AD 864 702, Arnold Engineering and Development Center, February 1970.
80. R. H. Roberts, Separation Characteristics of Eight Stores from the A-7D Aircraft at Mach Numbers from 0.42 to 0.95, AEDC-TR-70-127, AD 869 970, Arnold Engineering and Development Center, June 1970.
81. R. E. Kline, F-5A Category II Drag Data, FTC-TR-66-8, AD 482 935, Air Force Flight Test Center, May 1966.
82. Sidewinder Missile, Volume I, DDC-TAS-68-98 (Bibliography), AD 851 200, Defense Documentation Center, March 1969.
83. T. Z. Ellison, Jr., Analysis of High Speed Wind Tunnel Tests on Single and Multiple Carriage Bomb Racks, DAC LB-32647, Douglas Aircraft Company, Inc., July 1966.
84. H. R. Kietzman, Jr., Supersonic Multiple Bomb Rack, AFATL-TR-67-161, AD 826 602, Air Force Armament Laboratory, October 1967.
85. D. G. Hammond, Wind Tunnel Data Report 1/12 Scale F-111 Rigid Loads Model, Ames Research Center 9 x 7 Supersonic Wind Tunnel, Volume I (Ames Test No. 161, General Dynamics Test No. 118), FZT-12-136, AD 808 905L, General Dynamics/Fort Worth, March 1966.
86. F. J. Keeney, Documentation of Wind Tunnel Data from a 0.0833 Scale FB-111 External Store Rigid Loads Test, AEDC-TR-66-214, AD 802 527 L, Arnold Engineering and Development Center, November 1966.

87. R. W. Butler and F. J. Keeney, Store and Store-Pylon Loads Data for 1/12-Scale FB-111 Aircraft at Transonic Speeds, AEDC-TR-67-263, AD 824 571 L, Arnold Engineering and Development Center, December 1967.
88. F. J. Keeney and M. E. Sanders, Documentation of Store and Store-Pylon Loads Data for 1/12-Scale FB-111 Aircraft at Mach Numbers from 0.55 to 2.50, AEDC-TR-69-30, AD 848 046 L, Arnold Engineering and Development Center, February 1969.
89. M. E. Sanders and R. F. Lauer, Jr., Documentation of the Seek Eagle Store and Store-Pylon Loads Data for the 1/12-Scale F-111A Aircraft at Mach Numbers from 0.60 to 1.60, AEDC TR-69-76, AD 850 151 L, Arnold Engineering and Development Center, April 1969.
90. J. A. Black, Store and Store-Pylon Loads Test of a 1/12-Scale Model of the F-111A Aircraft at Mach Numbers from 0.60 to 1.60, AEDC TR-69-272, AD 863 365 L, Arnold Engineering and Development Center, December 1969.
91. D. E. A. Reichenau, Documentation of Wind Tunnel Data from a 1/12 Scale F-111D AIM-7G Rigid Loads Test, AEDC-TR-70-117, AD 868 804, Arnold Engineering and Development Center, May 1970.
92. N. K. Walker, The Estimation of the Aerodynamic Loads on External Stores, RAE Technical Note No. Aero 1715, N68-82745, Royal Aircraft Establishment, January 1946.
93. W. E. Summers and C. D. Riddle, Wind Tunnel Studies of the Separation Characteristics of the AGM-12E Missile when Launched from the Inboard Pylons of the F-105 Aircraft, AEDC-TR-68-155, AD 392 044, Arnold Engineering and Development Center, August 1968.
94. M. L. Homan, Documentation of a Store and Store-Pylon Loads Test of a 1/12 Scale Model of the F-111A Aircraft at Mach Numbers from 0.60 to 2.20, AEDC-TR-70-33, AD 865 001 L, Arnold Engineering and Development Center, February 1970.
95. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
96. D. C. Luke, BLU-58 Supersonic Munition Test, AFSWC-TR-69-24, AD 863 364 L, Air Force Special Weapons Center, November 1969.

97. L. Ray, et al., Model F-4J (MIN-MOD) Performance Data and Substantiation, Report G 649, AD 845 662 L, McDonnell Aircraft Corp., November 1968.
98. E. Stadler, Model F-4 (MOD) Performance Data and Substantiation, Report G 650, AD 845 663 L, McDonnell Aircraft Corp., November 1968.
99. Janis Kukainis, Aerodynamic Characteristics of the F-4E Aircraft with 35 External Load Configurations, AEDC-TR-70-171, AD 872 694, Arnold Engineering and Development Center, August 1970.
100. C. J. Martin and P. S. Montana, Techniques for the Prediction of Captive Airloads, NSRDC Report 3320, Aero Report 1174, AD 871 920, Naval Ships Research and Development Center, January 1970.
101. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
102. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
103. C. Carl Brindle, Wind Tunnel Investigation of External Store Arrangements to Reduce Wave Drag, DTMB Aero Report 1016, AD 270 495, David Taylor Model Basin, November 1961.
104. H. Katz, et al., Investigation of an ECM Pod Installation for the Model F-4C Aircraft, SEG-TR-67-2, AD 816 373 L, USAF Systems Command/Systems Engineering Group (WPAFB), March 1967.
105. J. F. Holford and W. J. G. Trebble, Low Speed Wind Tunnel Measurements and Estimations of the Pitching and Yawing Moments of Tanks Mounted on Struts under 40° Swept and Straight Wings, Technical Note Aero .2394, N68-85038, Royal Aircraft Establishment, October 1955.
106. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
107. R. H. Smith, Aerodynamic Theory and Test of Strut Forms, Part I, NACA TR 311, National Advisory Committee for Aeronautics, May 1928.

108. W. E. Stoney, Jr., Collection of Zero-Lift Drag Data on Bodies of Revolution from Free-Flight Investigations, NASA TR R-100, National Aeronautics and Space Administration, 1961.
109. D. R. Chapman and R. H. Kester, Turbulent Boundary-Layer and Skin-Friction Measurements in Axial Flow along Cylinders at Mach Numbers between 0.5 and 3.6, NACA TN 3097, National Advisory Committee for Aeronautics, 1954.
110. E. J. Landrum, et al., Effect of Nacelle Orientation of the Aerodynamic Characteristics of an Arrow Wing-Body Configuration at Mach Number 2.03, NASA TN D-3284, National Aeronautics and Space Administration (Langley), February 1966.
111. L. W. McKinney and E. C. Pulhamus, A Summary of NASA Data Relative to External-Store Separation Characteristics, NASA TN D-3582, National Aeronautics and Space Administration (Langley), November 1966.
112. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
113. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
114. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
115. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
116. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.

117. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
118. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
119. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
120. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
121. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
122. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
123. David Fisher, Flight-Measured Aerodynamic Drag of Two Large External Tanks Attached to the X-15-2 Airplane at Mach Numbers of 1.6 to 2.3, NASA TXM-1895, National Aeronautics and Space Administration (Flight Research Center, Edward AFB), October 1969.
124. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
125. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.

126. Sherwood Hoffman, Free-Flight Investigation of the Drag of a 60° Delta-Wing Configuration with Large Stores Mounted below the Indented Fuselage at Mach Numbers between 0.8 and 1.6, NASA Memo 10-9-58L, National Aeronautics and Space Administration, October 1958.
127. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
128. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
129. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
130. J. Ottensoser, Drag Effects of Various Methods of Carrying Fuselage Mounted Stores, NSRDC Aero 1150 (C-2939), AD 393 752 L, Naval Ships Research and Development Center, September 1968.
131. C. J. Martin, The Captive Flight Drag of a Series of Conformally Packaged Weapon Systems, Technical Note AL 63, Naval Ships Research and Development Center, September 1969.
132. G. S. Pick and C. J. Martin, Aerodynamic Characteristics of Rectangular Solid Bodies of Various Fineness Ratios at Mach Numbers of 0.74 and 1.88, Test Report AL 40, AD 820 278, Naval Ships Research and Development Center, July 1967.
133. Section 3 Revision to Aerodynamic Data Substantiation for Standard Aircraft Characteristics Charts and Regular Flight Manual F-111C Aircraft, R-1 revision pages to FZA-12-5001, General Dynamics/Fort Worth Division, October 1968.
134. R. C. Frost and J. B. Miles, Effects of External Stores on the Aerodynamic Characteristics of Aircraft, FZM-5044, General Dynamics/Fort Worth Division, March 1968.

135. J. B. Miles, Jr. et al, Aerodynamic Data Substantiation for Standard Aircraft Characteristics Charts and Regular Flight Manual, F-111A Number 31 and On, FZA-12-067, General Dynamics/Fort Worth Division, February 1968.
136. J. B. Miles, Memorandum Report on the Results from Wind Tunnel Tests Cal G52-293 and Cal G52-313, 1/15-Scale F-111/External Stores Tests, FZA-12-088, General Dynamics/Fort Worth Division, July 1970.
137. W. A. Seth, A-7D Estimated Flying Qualities (U), Report No. 2-53320/8R-8089, LTV Vought Aeronautics Division, January 1968.
138. S. Hall and J. Mason, Wind Tunnel Data from High Speed Tests of a 1/6-Scale Model of the Ryan Q-2 Drone including the Effects of External Stores, Report No. 6120-2, Ryan Aeronautical Company, December 1954.
139. R. E. Smith, Measured Air Loads for a Free-Fall Weapon on an A-4 Aircraft, NWC TP 4804, Naval Weapons Center, October 1969.
140. E. L. Rutan, Category II Stability and Control Evaluation of the F-4E Aircraft - Substantiating Document, FTC-SD-69-14, Air Force Flight Test Center, July 1969.
141. 1969 Aircraft/Stores Compatibility Symposium Proceedings, selected papers (6 volumes), Armament Development and Test Center, November 1969.
142. N. G. Ackerman and B. L. Warren, F-5 Basic Aerodynamic Data, Volume II, Cruise Configurations, NOR-64-2, Northrop Corporation/Norair Division, January 1964.
143. 150 Gallon Tank Douglas Aircraft Store (DAS) Fuel Tank, B-25-1706, Douglas Aircraft Company, Inc.
144. K. C. Carter, F-101B Category II Performance Test, FTC-TR-60-6, Air Force Flight Test Center, March 1960.
145. E. Saxey II, F-106A Performance Evaluation with 360 Gallon External Fuel Tanks, FTC-TR-66-48, Air Force Flight Test Center (Edwards), March 1967.
146. L. H. Berven, A-37B Category II Performance and Stability and Control Tests, FTC-TR-69-24, Air Force Flight Test Center, May 1969.

147. L. H. Berven, A-37B Category II Performance and Stability and Control Tests - Substantiating Data, FTC-SD-69-24, Air Force Flight Test Center, July 1969.
148. G. C. Lemmon, Bibliography of AFFTC Technical Publications and Presentations 1951 - 1964, FTC-TDR-64-16, Air Force Flight Test Center, August 1965.
149. USAF Series F-4C, F-4D, and F-4E Aircraft - Performance Data Manual, T.O. 1F-4C-1-1.
150. Dr. A. L. Ducoffe, An Estimate of the Installed Drag Coefficient of Wing Mounted Stores for the Mach Number Range 0.8 to 2.0, SC-TM-173-55-51, Sandia Laboratories, October 1955.
151. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
152. E. L. Rutan, Category II Stability and Control Evaluation of the F-4E Aircraft, FTC-TR-69-14, Air Force Flight Test Center (Edwards), April 1969.
153. E. L. Rutan, Stall/Near Stall Investigation of the F-4E Aircraft, FTC-TR-70-20, Air Force Flight Test Center, August 1970.
154. R. C. Crane, F-4E Category II Performance Tests, FTC-SD-69-21, Air Force Flight Test Center, August 1969.
155. L. H. Berven, A-37A Category II Performance Tests, AFFTC-TR-68-23, Air Force Flight Test Center, February 1969.
156. P. Marsden and A. B. Haines, Aerodynamic Loads on External Stores: A Review of Experimental Data and Method of Prediction, R&M No. 3503, Ministry of Technology, 1967.
157. G. K. Hunt, Free-Flight Measurements of the Incremental Drag due to Engine Nacelles on a Transonic Swept-Wing Aircraft, CP. No. 960, AD 823 551, Ministry of Technology, 1967.
158. J. W. Cummings, Report on Additional High-Speed Wind Tunnel Tests of External Stores and a Bomb Mounted on a Douglas, El Segundo, 0.06 Scale Bomber Model, CWT Report 146, AD 131 096, Southern California Cooperative Wind Tunnel, May 1950.

159. C. Driver, Wind Tunnel Investigation of the Interference Effects during Separation of a 1/40-Scale Model Convair B-58 Airplane and Store at Mach Numbers of 1.41, 1.61 and 2.01, NACA RM SL56L14, N66-81416, National Advisory Committee for Aeronautics (Langley), December 1956.
160. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
161. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
162. M. L. Homan, Static Stability Characteristics of the M-117 Bomb at Mach Numbers from 0.60 to 1.40 with Three Tail Fin Configurations, AEDC-TR-68-162, AD 836 963, Arnold Engineering and Development Center, July 1968.
163. D. J. McNally, et al., Flying Qualities of the F-5A Aircraft ECP 725D Mixed Stores Configurations (Stability and Store Jettison), NOR-68-35, AD 836 128L, Northrop Corporation/Norair Division, May 1968.
164. A. J. Bielecki, F-8E (F8U-2NE) Wing Store Installation Airloads, Report No. 2-53310/4R-115, LTV Vought Aeronautics Division, June 1964.
165. S. A. Romero and B. C. Head, F-8H and F-8J Performance Data, Report No. 2-53310/8R-7201, LTV Vought Aeronautics Division, August 1968.
166. W. V. Shearer and R. J. Arnold, Bibliography of Information for the F-8 and A-7 Airplanes Pertaining to the Carriage and Separation of the External Stores, Report No. 2-53310/6R-50238, LTV Vought Aeronautics Division, January 1966.
167. H. E. Styne and D. E. Smith, A-7D Aircraft Basic Data for Performance Calculations, Report No. 2-53310/8R-6142, LTV Vought Aeronautics Division, May 1968.
168. T. J. King, Jr., et al., Preliminary Development of Empirical Method of Estimating Aerodynamic Characteristics of Winged External Stores in Proximity to Aircraft Wings at Low Speed, NO AS 59-6173-C, Report 00.178, TEMCO Aircraft Corp., May 1960.
169. H. E. Styne, A-7E Basic Data Report, Report No. 2-53330/0R-5537, LTV Vought Aeronautics Division, February 1970.
170. Z. A. Pihut, Determination of Aerodynamic Forces on Externally Mounted Stores, Report No. 2-53340/8R-8093, LTV Vought Aeronautics Division, January 1968.

171. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
172. H. E. Styne and C. D. Andrews, A-7B Performance Data, Report No. 2-53330/8R-5346, LTV Vought Aeronautics Division, January 1968.
173. J. Kukainis, Parametric Study of the Separation Characteristics of Two External Stores from the F-4C Aircraft at Transonic Speeds, AEDC-TR-70-87, Arnold Engineering and Development Center, April 1970.
174. E. L. Stadler and S. J. Trommler, F-4C Performance Data and Substantiation, G853 Vol. I, McDonnell Aircraft Corporation, December 1968.
175. B. Reichlin and M. Margolin, Substantiation Report for Configuration Drag Index Performance of T.O. 1E-105D-1, Appendix I, RAC No. 2277 (EAR-498), Republic Aviation Corporation, March 1964.
176. L. Smith and M. Margolin, Substantiation Report for F-105F Standard Aircraft Characteristics Charts, RAC 2777 (EAR 505), Republic Aviation Corporation, March 1965.
177. L. Smith and M. Margolin, Substantiation Report (EAR-491) for F-105F - Standard Aircraft Characteristics Charts, RAC No. 1691 (EAR-491), Republic Aviation Corporation, August 1963.
178. B. J. Noga and P. D. Sorenson, Performance Calculations Based on Flight Test Results for the F-100D Airplane with a J57-P-21 Engine, NA-58-183, North American Aviation, Inc., February 1958.
179. E. Chewning and B. Ferrante, Model F-101A/C and RF-101A/C Performance Data Substantiation Report, Report 5447, McDonnell Aircraft Corporation, June 1957 (Revised June 1960).
180. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
181. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
182. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.

183. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
184. J. W. Cummings, Report on High Speed Wind Tunnel Tests of a Family of Stores and Bombs on a Douglas, El Segundo, 0.06-Scale Sting-Mounted Bomber, CWT Report 139, Southern California Cooperative Wind Tunnel, April 1950.
185. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
186. R. G. Smithers, Jr. and W. R. Stankiewicz, Miscellaneous Loads (A2F-1 and EA-6A Aircraft), Report No. 4102.4, Grumman Aircraft Engineering Corporation, January 1965.
187. L. G. Manoogian, Armament Loads Model A4D-2, -2N and Appendix A - Armament Loads and Stress Analysis Model A4D-5, ES-26812, Douglas Aircraft Company, Inc., May 1961.
188. L. G. Manoogian, Armament Loads - Model A4D-2, E. S. 26812, Douglas Aircraft Company, Inc., November 1957.
189. F-4E Performance Data and Substantiation, Report F696, Vol. I, McDonnell-Douglas Aircraft Company, August 1967.
190. Performance Data for the Model A-4M Aircraft, MDC J0004, McDonnell Douglas Corporation, Douglas Aircraft Company, March 1970.
191. R. D. Gallagher and P. E. Browne, "External Store Airloads Prediction", technical paper presented at Eighth U. S. Navy Symposium on Aeroballistics, Naval Weapons Center, May 1969.
192. R. D. Gallagher, "Approaches to External Store Airload Prediction", technical paper presented at U. S. Air Force Store Compatibility Symposium, Eglin AFB, November 1969.
193. W. E. Summers, Flow Field Characteristics and Aerodynamic Loads on External Stores near the Fuselage and Wing Pylon Positions of a Swept-Wing/Fuselage Model at Mach Numbers of 0.25 and 0.70, AEDC-TR-70-202, AD 874 831, Arnold Engineering and Development Center, September 1970.

194. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
195. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
196. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
197. W. I. Oehman and K. L. Turner, Aerodynamic Characteristics of a 45° Swept-Wing Fighter-Airplane Model and Aerodynamic Loads on Adjacent Stores and Missiles at Mach Numbers of 1.57, 1.87, 2.16, and 2.53, NACA RM L58G17, National Advisory Committee for Aeronautics, June 1958.
198. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
199. C. T. Johnson, Flight Investigation of the Aerodynamic Forces on a Wing-Mounted External-Store Installation on the Douglas D-558-II Research Airplane, NACA RM H58B24, National Advisory Committee for Aeronautics, May 1958.
200. D. J. Geier, An Investigation of Supersonic Stores Interference in the Vicinity of a 22° Swept-Wing-Fuselage Configuration at Mach Numbers of 1.61 and 2.01, NACA RM L57L18, National Advisory Committee for Aeronautics, February 1958.
201. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
202. O. A. Morris, Experimental and Theoretical Determination of Forces and Moments on a Store and on a Store-Pylon Combination Mounted on a 45° Swept-Wing-Fuselage Configuration at a Mach Number of 1.61, NACA RM L57K18, National Advisory Committee for Aeronautics, January 1958.

203. Effects of Components and Various Modifications on the Drag and the Static Stability and Control Characteristics of a 42° Swept-Wing Fighter-Airplane Model at Mach Numbers of 1.60 to 2.50, NACA RM L57K01, National Advisory Committee for Aeronautics, November 1957.
204. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
205. G. H. Holdaway, et al., A Transonic Investigation of the Effects of Semisubmerged-Store Cavities and of Slots on the Zero-Lift Drag of a Body of Revolution, NACA RM A57H19a, National Advisory Committee for Aeronautics, October 1957.
206. J. Fischel, et al., Effects of Wing-Mounted External Stores on the Longitudinal and Lateral Handling Qualities of the Douglas D-558-II Research Airplane, NACA RM H57H12, National Advisory Committee for Aeronautics, October 1957.
207. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
208. A. O. Pearson, Transonic Investigation of Effects of Spanwise and Chordwise External Store Location and Body Contouring on Aerodynamic Characteristics of 45° Sweptback Wing-Body Configurations, NACA RM L57G17, National Advisory Committee for Aeronautics, September 1957.
209. J. Nugent, Effect of Wing-Mounted External Stores on the Lift and Drag of the Douglas D-558-II Research Airplane at Transonic Speeds, NACA RM H57E15a, National Advisory Committee for Aeronautics, July 1957.
210. P. J. Bobbitt, et al., Calculation of External-Store Loads and Correlation with Experiment, NACA RM L57D30a, National Advisory Committee for Aeronautics, July 1957.
211. W. J. Alford, Jr., and T. J. King, Jr., Experimental Static Aerodynamic Forces and Moments at High Subsonic Speeds on a Missile Model during Simulated Launching from Unswept-, Sweptback-, and Modified-Delta-Wing-Fuselage Combinations at Zero Sideslip, NACA RM L57B04, National Advisory Committee for Aeronautics, March 1957.

212. S. Hoffman, Zero-Lift Drag of a Large Fuselage Cavity and a Partially Submerged Store on a 52.5° Sweptback-Wing-Body Configuration as Determined from Free-Flight Tests at Mach Numbers of 0.7 to 1.53, NACA RM L56L21, National Advisory Committee for Aeronautics, February 1957.
213. D. J. Geier and H. W. Carlson, Measurement of Static Forces on Externally Carried Bombs of Fineness Ratios 7.1 and 10.5 in the Flow Field of a Swept-Wing Fighter-Bomber Configuration at a Mach Number of 1.6, NACA RM L56K30, National Advisory Committee for Aeronautics, January 1957.
214. W. J. Alford, Jr. and T. J. King, Jr., Experimental Static Aerodynamic Forces and Moments at High Subsonic Speeds on a Canard Missile during Simulated Launching from the Midsemispan Location of a 45° Sweptback Wing-Fuselage-Pylon Combination at Zero Sideslip, NACA RM L56J15a, National Advisory Committee for Aeronautics, January 1957.
215. P. R. Hill and S. Hoffman, Preliminary Evaluation of the Wing Leading Edge as a Missile-Mounting Location, NACA RM L56J12, National Advisory Committee for Aeronautics, January 1957.
216. W. J. Alford, Jr. and T. J. King, Jr., Experimental Static Aerodynamic Forces and Moments at High Subsonic Speeds on a Missile Model during Simulated Launching from the Midsemispan Location of a 45° Sweptback Wing-Fuselage-Pylon Combination, NACA RM L56J05, National Advisory Committee for Aeronautics, January 1957.
217. O. A. Morris, Aerodynamic Forces and Moments on a Large Ogive-Cylinder Store at Various Locations below the Fuselage Centerline of a Swept-Wing Bomber Configuration at a Mach Number of 1.61, NACA RM L56I25, National Advisory Committee for Aeronautics, January 1957.
218. N. F. Smith and H. W. Carlson, Measurement of Static Forces on Internally Carried Bombs of Three Fineness Ratios in Flow Field of a Swept-Wing Fighter-Bomber Configuration at a Mach Number of 1.61 with Illustrative Drop-Path Calculations, NACA RM L56I18, National Advisory Committee for Aeronautics, January 1957.
219. T. J. King, Jr., Wind Tunnel Investigation at High Subsonic Speeds of Drag at 0° Angle of Attack of Swept-Wing-Fuselage Models with Pylon-Mounted and Semisubmerged Missiles, NACA RM L56G19a, National Advisory Committee for Aeronautics, October 1956.

220. G. V. Foster and C. Driver, Effects of External Stores on the Static Longitudinal and Lateral Aerodynamic Characteristics of a Model of a 45° Swept-Wing Fighter Airplane at Mach Numbers of 1.61 and 2.01, NACA RM L56F15a, National Advisory Committee for Aeronautics, August 1956.
221. J. L. Summers, Wind Tunnel Investigation at Mach Numbers from 0.8 to 1.4 of Static Longitudinal and Lateral-Directional Characteristics of an Unswept-Wing Airplane Model, NACA RM A56E22, National Advisory Committee for Aeronautics, December 1956.
222. W. E. Stoney, Jr. and J. F. Royal, Zero-Lift Drag of a Series of Bomb Shapes at Mach Numbers from 0.60 to 1.10, NACA RM L56D16, National Advisory Committee for Aeronautics, July 1956.
223. W. M. Hadaway, Aerodynamic Loads on an External Store Adjacent to a 60° Delta Wing at Mach Numbers from 0.75 to 1.96, NACA RM L56B02a, National Advisory Committee for Aeronautics, April 1956.
224. J. M. Hallissy, Jr. and L. Kudláček, A Transonic Wind Tunnel Investigation of Store and Horizontal-Tail Loads and Some Effects of Fuselage-Afterbody Modifications on a Swept-Wing Fighter Airplane, NACA RM L56A26, National Advisory Committee for Aeronautics, April 1956.
225. P. J. Bobbitt, et al., Theoretical Prediction of the Side Force on Stores Attached to Configurations Traveling at Supersonic Speeds, NACA RM L55L30b, National Advisory Committee for Aeronautics, March 1956.
226. R. B. Robinson, Longitudinal Characteristics of an Unswept-Wing Fighter-Type Model with External Stores at a Mach Number of 1.82 and Some Effects of Horizontal-Tail and Yaw-Damper-Vane Deflection on the Sideslip Derivatives, NACA RM L55L26, National Advisory Committee for Aeronautics, August 1956.
227. N. F. Smith, The Origin and Distribution of Supersonic Store Interference from Measurement of Individual Forces on Several Wing-Fuselage-Store Configurations VI Swept-Wing Heavy-Bomber Configuration with Stores of Different Sizes and Shapes, NACA RM L55L08, National Advisory Committee for Aeronautics, March 1956.
228. W. M. Hadaway, Aerodynamic Loads on an External Store Adjacent to an Unswept Wing at Mach Numbers between 0.75 and 1.96, NACA RM L55L07, National Advisory Committee for Aeronautics, February 1956.

229. H. W. Carlson and D. J. Geier, The Origin and Distribution of Supersonic Store Interference from Measurement of Individual Forces on Several Wing-Fuselage-Store Configurations V Swept-Wing Heavy-Bomber Configuration with Large Store (Nacelle), Mach Number 2.01, NACA RM L55K15, National Advisory Committee for Aeronautics, February 1956.
230. O. A. Morris, The Origin and Distribution of Supersonic Store Interference from Measurement of Individual Forces on Several Wing-Fuselage-Store Configurations IV Delta-Wing Heavy-Bomber Configuration with Large Store, Mach Number 1.61, NACA RM L55I27a, National Advisory Committee for Aeronautics, December 1955.
231. T. C. Kelly, Transonic Wind Tunnel Investigation of the Effects of External Stores and Store Position on the Aerodynamic Characteristics of a 1/16-Scale Model of the Douglas D-558-II Research Airplane, NACA RM L55I07, National Advisory Committee for Aeronautics, November 1955.
232. F-100C/External Store Preliminary Data (Langley 8 Ft. Transonic Tunnel), RM L55I01, National Advisory Committee for Aeronautics (conducted for North American Aviation), August 1955.
233. L. D. Guy and W. M. Hadaway, Aerodynamic Loads on an External Store Adjacent to a 45° Sweptback Wing at Mach Numbers from 0.70 to 1.96 including an Evaluation of Techniques Used, NACA RM L55H12, National Advisory Committee for Aeronautics, November 1955.
234. N. F. Smith and H. W. Carlson, The Origin and Distribution of Supersonic Store Interference from Measurement of Individual Forces on Several Wing-Fuselage-Store Configurations III Swept-Wing Fighter-Bomber Configuration with Large and Small Stores, Mach Number 1.61, NACA RM L55H01, National Advisory Committee for Aeronautics, September 1955.
235. H. A. Hamer and T. C. O'Bryan, Flight Measurements of the Loads and Moments on an External Store Mounted under the Wing of a Swept-Wing Fighter-Type Airplane during Yawing and Rolling Maneuvers, NACA RM L55G22, National Advisory Committee for Aeronautics, September 1955.
236. R. W. Rainey, Investigation of the Effects of Bomb-Bay Configuration upon the Aerodynamic Characteristics of a Body with Circular Cross Section at Supersonic Speeds, NACA RM L55E27, National Advisory Committee for Aeronautics, August 1955.

237. H. W. Carlson and N. F. Smith, The Origin and Distribution of Supersonic Store Interference from Measurement of Individual Forces on Several Wing-Fuselage-Store Configurations II, NACA RM L55E26a, National Advisory Committee for Aeronautics, July 1955.
238. L. D. Guy, Loads on External Stores at Transonic and Supersonic Speeds, NACA RM L55E13b, National Advisory Committee for Aeronautics, July 1955.
239. N. F. Smith and H. W. Carlson, Some Effects of Configuration Variables on Store Loads at Supersonic Speeds, NACA RM L55E05, National Advisory Committee for Aeronautics, July 1955.
240. H. P. Mason, Effects of Wing-Mounted Tank-Type Stores on the Low-Lift Buffeting and Drag of a Swept-Wing Airplane Configuration between Mach Numbers of 0.8 and 1.3, NACA RM L55D27, National Advisory Committee for Aeronautics, October 1955.
241. W. J. Alford, Jr., Experimental Static Aerodynamic Forces and Moments at Low Speed on a Missile Model during Simulated Launching from the 25 Percent Semispan and Wing-Tip Locations of a 45° Sweptback Wing-Fuselage Combination, NACA RM L55D20, National Advisory Committee for Aeronautics, May 1955.
242. H. N. Silvers and T. J. King, Jr., Investigation at High Subsonic Speeds of the Effects of Various Underwing External-Store Arrangements on the Aerodynamic Characteristics of a 1/16-Scale Model of the Douglas D-558-II Research Airplane, NACA RM L55D11, National Advisory Committee for Aeronautics, July 1955.
243. W. C. Sleeman, Jr. and W. J. Alford, Jr., Low-Speed Investigation of the Effects of Wing Tanks and Speed Brakes on the Static Stability of a Model Having a 40° Swept Wing, NACA RM L55C17, National Advisory Committee for Aeronautics, May 1955.
244. N. F. Smith and H. W. Carlson, The Origin and Distribution of Supersonic Store Interference from Measurement of Individual Forces on Several Wing-Fuselage-Store Configurations, I. Swept-Wing Heavy-Bomber Configuration with Large Store (Nacelle). Lift and Drag; Mach Number 1.61, NACA RM L55A13a, National Advisory Committee for Aeronautics, March 1955.
245. W. J. Alford, Jr., Experimental Static Aerodynamic Forces and Moments at Low Speed on a Canard Missile during Simulated Launching from the Midsemispan and Wing-Tip Locations of a 45° Sweptback Wing-Fuselage Combination, NACA RM L55A12, National Advisory Committee for Aeronautics, April 1955.

246. J. E. Stevens and P. E. Purser, Flight Measurements of the Transonic Drag of Models of Several Isolated External Stores and Nacelles, NACA RM L54L07, National Advisory Committee for Aeronautics, March 1955.
247. A. B. Henning and G. A. Brown, Jr., Flight Characteristics of a Wingless Rocket-Powered Model with Four Externally Mounted Air-to-Air Missiles at Mach Numbers from 0.7 to 1.6, NACA RM L54K17a, National Advisory Committee for Aeronautics, January 1955.
248. W. J. Alford, Jr., et al., Experimental Aerodynamic Forces and Moments at Low Speed of a Missile Model during Simulated Launching from the Midsemispan Location of a 45° Sweptback Wing-Fuselage Combination, NACA RM L54K11a, National Advisory Committee for Aeronautics, February 1955.
249. J. R. Thompson, et al., A Limited Analysis of Buffeting Experience in Flight by a North American F-86A-1 Airplane with and without Large External Fuel Tanks, NACA RM L54J22, National Advisory Committee for Aeronautics, September 1955.
250. H. E. Styne, et al., A-7D Performance Data, 2-53330/OR-8404, LTV Aerospace Corporation, Vought Aeronautics Division, September 1970.
251. W. J. Alford, Jr., et al., Preliminary Low-Speed Wind-Tunnel Investigation of Some Aspects of the Aerodynamic Problems Associated with Missiles Carried Externally in Positions near Airplane Wings, NACA RM L54J20, National Advisory Committee for Aeronautics, December 1954.
252. H. P. Mason and A. B. Henning, Effects of Some External-Store Mounting Arrangements and Store Shapes on the Buffet and Drag Characteristics of Wingless Rocket-Powered Models at Mach Numbers from 0.7 to 1.4, NACA RM L54I20a, National Advisory Committee for Aeronautics, December 1954.
253. R. D. English, Some Effects of External Wing Tip Stores on the Rolling Effectiveness and Drag of Plain and Half-Delta Tip Ailerons on a 4-Percent-Thick, Tapered, Unswept Wing, NACA RM L54F29a, National Advisory Committee for Aeronautics, August 1954.
254. N. F. Smith, Exploratory Investigation of External Stores on the Aerodynamic Characteristics of a 1/16-Scale Model of the Douglas D-558-II Research Airplane at a Mach Number of 2.01, NACA RM L54F02, National Advisory Committee for Aeronautics, August 1954.

255. S. Hoffman and A. L. Wolff, Effect on Drag of Longitudinal Positioning of Half-Submerged and Pylon-Mounted Douglas Aircraft Stores on a Fuselage with and without Cavities between Mach Numbers 0.9 and 1.8, NACA RM L54E26, National Advisory Committee for Aeronautics, July 1954.
256. H. N. Silvers and W. J. Alford, Jr., Investigation at High Subsonic Speeds of the Effect of Adding Various Combinations of Missiles on the Aerodynamic Characteristics of Sweptback and Unswept Wings Combined with a Fuselage, NACA RM L54D20, National Advisory Committee for Aeronautics, June 1954.
257. A. B. Henning, The Effects of Wing-Mounted External Stores on the Trim, Buffet, and Drag Characteristics of a Rocket-Propelled Model Having a 45° Sweptback Wing, NACA RM L54B19, National Advisory Committee for Aeronautics, April 1954.
258. W. J. Alford, Jr. and H. N. Silvers, Investigation at High Subsonic Speeds of Finned and Unfinned Bodies Mounted at Various Locations from the Wings of Unswept- and Swept-Wing-Fuselage Models, including Measurements of Body Loads, NACA RM L54B18, National Advisory Committee for Aeronautics, April 1954.
259. H. N. Silvers, et al., Wind Tunnel Investigation at High Subsonic Speeds of the Effects of Wing-Mounted External Stores on the Loading and Aerodynamic Characteristics in Pitch of a 45° Sweptback Wing Combined with a Fuselage, NACA RM L54A21, National Advisory Committee for Aeronautics, March 1954.
260. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
261. H. P. Mason, Effects of External Store Mounting on the Buffet, Trim, and Drag Characteristics of Rocket-Powered Fuselage and Store Combinations between Mach Numbers of 0.7 and 1.4, NACA RM L53J22, National Advisory Committee for Aeronautics, December 1953.
262. N. F. Smith, et al., Drag of External Stores and Nacelles at Transonic and Supersonic Speeds, NACA RM L53I23b, National Advisory Committee for Aeronautics, October 1953.
263. S. Hoffman and A. L. Wolff, Transonic Flight Tests to Determine Zero-Lift Drag and Pressure Recovery of Nacelles Located at the Wing Root on a 45° Sweptback Wing and Body Configuration, NACA RM L53H20, National Advisory Committee for Aeronautics, September 1953.

264. H. N. Silvers and T. J. King, Jr., Investigation of the Effect of Spanwise Positioning of a Vertically Symmetric Ogive-Cylinder Nacelle on the High-Speed Aerodynamic Characteristics of a 45° Sweptback Tapered-in-Thickness Wing of Aspect Ratio 6 with and without a Fuselage, NACA RM L53H17, National Advisory Committee for Aeronautics, October 1953.
265. W. I. Scallion, Low-Speed Investigation of the Aerodynamic, Control, and Hinge-Moment Characteristics in Sideslip of a Delta-Wing-Fuselage Model with Horn-Balance-Type Ailerons and with and without Nacelles, NACA RM L53G09b, National Advisory Committee for Aeronautics, August 1953.
266. S. Hoffman and W. B. Pepper, Jr., The Effect of Nacelle Combinations and Size on the Zero-Lift Drag of a 45° Sweptback Wing and Body Configuration as Determined by Free-Flight Tests at Mach Numbers between 0.8 and 1.3, NACA RM L53E25, National Advisory Committee for Aeronautics, June 1953.
267. H. N. Silvers and T. C. O'Bryan, Some Notes on the Aerodynamic Loads Associated with External-Store Installations, NACA RM L53E06a, National Advisory Committee for Aeronautics, June 1953.
268. R. W. Rainey, Effect of Variations in Reynolds Number on the Aerodynamic Characteristics of Three Bomb or Store Shapes at a Mach Number of 1.62 with and without Fins, NACA RM L53D27, National Advisory Committee for Aeronautics, June 1953.
269. B. E. Tinling and A. E. Lopez, The Effects of Nacelles and of Extended Split Flaps on the Longitudinal Characteristics of a Wing-Fuselage-Tail Combination having a Wing with 40° of Sweepback and an Aspect Ratio of 10, NACA RM A53D06, National Advisory Committee for Aeronautics, June 1953.
270. G. L. Mitcham and W. S. Blanchard, Jr., Low-Lift Drag and Stability Data from Rocket Models of a Modified-Delta-Wing Airplane with and without External Stores at Mach Numbers from 0.8 to 1.36, NACA RM L53A27, National Advisory Committee for Aeronautics, March 1953.
271. H. N. Silvers and T. J. King, Jr., Investigation of the Effect of Chordwise Positioning and Shape of an Underwing Nacelle on the High-Speed Aerodynamic Characteristics of a 45° Sweptback Tapered-in-Thickness-Ratio Wing of Aspect Ratio 6, NACA RM L52K25, National Advisory Committee for Aeronautics, January 1953.

272. C. R. Jacobsen, Effects of Size of External Stores on the Aerodynamic Characteristics of an Unswept and a 45° Sweptback Wing of Aspect Ratio 4 and a 60° Delta Wing at Mach Numbers of 1.41, 1.62, and 1.96, NACA RM L52K20a, National Advisory Committee for Aeronautics, January 1953.
273. C. R. Jacobsen, Effects of the Spanwise, Chordwise, and Vertical Location of an External Store on the Aerodynamic Characteristics of a 45° Sweptback Tapered Wing of Aspect Ratio 4 at Mach Numbers of 1.41, 1.62, and 1.96, NACA RM L52J27, National Advisory Committee for Aeronautics, January 1953.
274. H. N. Silvers and T. J. King, Jr., A Small-Scale Investigation of the Effect of Spanwise and Chordwise Positioning of an Ogive-Cylinder Underwing Nacelle on the High-Speed Aerodynamic Characteristics of a 45° Sweptback Tapered-in-Thickness Wing of Aspect Ratio 6, NACA RM L52J22, National Advisory Committee for Aeronautics, December 1952.
275. C. F. Coe, The Effects of Tip-Mounted Jet Nacelles on the Transonic Characteristics of Low-Aspect-Ratio Wings, NACA RM A52J21, National Advisory Committee for Aeronautics, December 1952.
276. H. N. Silvers and T. J. King, Jr., Investigation at High Subsonic Speeds of Bodies Mounted from the Wing of an Unswept-Wing-Fuselage Model, including Measurements of Body Loads, NACA RM L52J08, National Advisory Committee for Aeronautics, November 1952.
277. C. R. Jacobsen, Effects of the Spanwise, Chordwise, and Vertical Location of an External Store on the Aerodynamic Characteristics of a 60° Delta Wing at Mach Numbers of 1.41, 1.62, and 1.96, NACA RM L52H29, National Advisory Committee for Aeronautics, October 1952.
278. R. P. Bielat and D. E. Harrison, A Transonic Wind Tunnel Investigation of the Effects of Nacelle Shape and Position on the Aerodynamic Characteristics of Two 47° Sweptback Wing-Body Configurations, NACA RM L52G02, National Advisory Committee for Aeronautics, September 1952.
279. C. R. Jacobsen, Effects of Systematically Varying the Spanwise and Vertical Location of an External Store on the Aerodynamic Characteristics of an Unswept Tapered Wing of Aspect Ratio 4 at Mach Numbers of 1.41, 1.62, and 1.96, NACA RM L52F13, National Advisory Committee for Aeronautics, August 1952.

280. W. I. Scallion, Low-Speed Investigation of the Effects of Nacelles on the Longitudinal Aerodynamic Characteristics of a 60° Swept-back Delta-Wing-Fuselage Combination with NACA 65A003 Airfoil Sections, NACA RM L52F04, National Advisory Committee for Aeronautics, July 1952.
281. C. Driver, Aerodynamic Characteristics at Supersonic Speeds of a Series of Wing-Body Combinations Having Cambered Wings with an Aspect Ratio of 3.5 and a Taper Ratio of 0.2. Effect at $M = 2.01$ of Nacelle Shape and Position on the Aerodynamic Characteristics in Pitch of Two Wing-Body Combinations with 47° Sweptback Wings, NACA RM L52F03, National Advisory Committee for Aeronautics, July 1952.
282. S. Hoffman, Transonic Flight Tests to Compare the Zero-Lift Drags of Underslung Nacelles Varied Spanwise on a 45° Sweptback Wing and Body Combination, NACA RM L52D04a, National Advisory Committee for Aeronautics, July 1952.
283. D. Conrard, Lift, Drag, and Pitching Moment of Low-Aspect-Ratio Wings at Subsonic and Supersonic Speeds -- Plane Triangular Wing of Aspect Ratio 3 with Air-to-Air Missile Models Mounted Externally, NACA RM A52C10a, National Advisory Committee for Aeronautics, June 1952.
284. S. Hoffman and R. C. Mapp, Jr., Transonic Flight Tests to Compare the Zero-Lift Drags of 45° Sweptback Wings of Aspect Ratio 3.55 and 6.0 with and without Nacelles at the Wing Tips, NACA RM L51L27, National Advisory Committee for Aeronautics, March 1952.
285. W. E. Stoney, Jr., Pressure Distributions at Mach Numbers from 0.6 to 1.9 Measured in Free Flight on a Parabolic Body of Revolution with Sharply Convergent Afterbody, NACA RM L51L03, National Advisory Committee for Aeronautics, April 1952.
286. L. E. Hasel and J. R. Sevier, Jr., Aerodynamic Characteristics at Supersonic Speeds of a Series of Wing-Body Combinations having Cambered Wings with an Aspect Ratio of 3.5 and a Taper Ratio of 0.2. Effect at $M = 1.60$ of Nacelle Shape and Position on the Aerodynamic Characteristics on Pitch of Two Wing-Body Combinations with 47° Sweptback Wings, NACA RM L51K14a, National Advisory Committee for Aeronautics, January 1952.

287. S. Hoffman and W. B. Pepper, Jr., Transonic Flight Tests to Determine Zero-Lift Drag and Pressure Recovery of Nacelles Located at the Wing Tips on a 45° Sweptback Wing and Body Combination, NACA RM L51K02, National Advisory Committee for Aeronautics, January 1952.
288. H. N. Silvers, et al., Investigation of the Effect of a Nacelle at Various Chordwise and Vertical Positions on the Aerodynamic Characteristics at High Subsonic Speeds of a 45° Sweptback Wing with and without a Fuselage, NACA RM L51H16, National Advisory Committee for Aeronautics, September 1951.
289. W. B. Pepper, Jr. and S. Hoffman, Comparison of Zero-Lift Drags Determined by Flight Tests at Transonic Speeds of Symmetrically Mounted Nacelles in Various Chordwise Positions at the Wing Tip of a 45° Sweptback Wing and Body Combination, NACA RM L51F13, National Advisory Committee for Aeronautics, September 1951.
290. R. G. Hart, Flight Investigation of the Drag of Round-Nosed Bodies of Revolution at Mach Numbers from 0.6 to 1.5 using Rocket-Propelled Test Vehicles, NACA RM L51E25, National Advisory Committee for Aeronautics, July 1951.
291. S. Hoffman, Comparison of Zero-Lift Drag Determined by Flight Tests at Transonic Speeds of Pylon, Underslung, and Symmetrically Mounted Nacelles at 40 Percent Semispan of a 45° Sweptback Wing and Body Combination, NACA RM L51D26, National Advisory Committee for Aeronautics, June 1951.
292. W. B. Pepper, Jr. and S. Hoffman, Comparison of Zero-Lift Drags Determined by Flight Tests at Transonic Speeds of Symmetrically Mounted Nacelles in Various Spanwise Positions on a 45° Sweptback Wing and Body Combination, NACA RM L51D06, National Advisory Committee for Aeronautics, May 1951.
293. K. P. Spreeman and W. J. Alford, Jr., Investigation of the Effects of Geometric Changes in an Underwing Pylon-Suspended External-Store Installation on the Aerodynamic Characteristics of a 45° Sweptback Wing at High Subsonic Speeds, NACA RM L50L12, National Advisory Committee for Aeronautics, March 1951.
294. B. E. Tinling and W. R. Kolk, The Effects of Centrally Mounted Wing-Tip Tanks on the Subsonic Aerodynamic Characteristics of a Wing of Aspect Ratio 10 with 35° of Sweepback, NACA RM A50K15, National Advisory Committee for Aeronautics, February 1951.

295. E. B. May, Jr., Investigation of the Aerodynamic Effects of an External Store in Combination with 60° Delta and Low-Aspect-Ratio Tapered Wings at a Mach Number of 1.9, NACA RM L50K03, National Advisory Committee for Aeronautics, January 1951.
296. R. G. Hart, Flight Investigation at Mach Numbers from 0.8 to 1.5 to Determine the Effects of Nose Bluntness on the Total Drag of Two Fin-Stabilized Bodies of Revolution, NACA RM L50I08a, National Advisory Committee for Aeronautics, October 1950.
297. H. H. Jackson, et al., Flight Measurements of Drag and Base Pressure of a Fin-Stabilized Parabolic Body of Revolution (NACA RM-10) at Different Reynolds Numbers and at Mach Numbers from 0.9 to 3.3, NACA RM L50G24, National Advisory Committee for Aeronautics, September 1950.
298. F. W. Boltz and B. H. Beam, The Effects of Compressibility on the Pressures on a Body of Revolution and on the Aerodynamic Characteristics of a Wing-Nacelle Combination Consisting of the Body of Revolution Mounted on a Swept-Back Wing, NACA RM A50E09, National Advisory Committee for Aeronautics, July 1950.
299. F. T. Esenwein, et al., Aerodynamic Characteristics of NACA RM-10 Missiles in 8- by 6-foot Supersonic Wind Tunnel at Mach Numbers from 1.49 to 1.98. II - Presentation and Analysis of Force Measurements, NACA RM E50D28, National Advisory Committee for Aeronautics, July 1950.
300. C. J. Welsh and J. D. Morrow, Effect of Wing-Tank Location on the Drag and Trim of a Swept-Wing Model as Measured in Flight at Transonic Speeds, NACA RM L50A19, National Advisory Committee for Aeronautics, April 1950.
301. H. N. Silvers and K. P. Spreemann, Experimental Investigation of Various External-Store Configurations on a Model of a Tailless Airplane with a Sweptback Wing, NACA RM L9K25, National Advisory Committee for Aeronautics, January 1950.
302. H. N. Silvers and K. P. Spreemann, Effect of Airfoil Section and Tip Tanks on the Aerodynamic Characteristics at High Subsonic Speeds of an Unswept Wing of Aspect Ratio 5.16 and Taper Ratio 0.61, NACA RM L9J04, National Advisory Committee for Aeronautics, December 1949.

303. R. G. Hart and E. R. Katz, Flight Investigations at High-Subsonic, Transonic, and Supersonic Speeds to Determine Zero-Lift Drag of Fin-Stabilized Bodies of Revolution Having Fineness Ratios of 12.5, 8.91, and 6.04 and Varying Positions of Maximum Diameter, NACA RM L9I30, National Advisory Committee for Aeronautics, November 1949.
304. S. R. Alexander, Effect of Strut-Mounted Wing Tanks on the Drag of NACA RM-2 Test Vehicles in Flight at Transonic Speeds, NACA RM L8H31a, National Advisory Committee for Aeronautics, November 1948.
305. H. N. Silvers and K. P. Spreemann, Wind Tunnel Investigation of a Wing-Fuselage Combination with External Stores, NACA RM L7K20, National Advisory Committee for Aeronautics, July 1948.
306. H. N. Silvers and K. P. Spreemann, Wind Tunnel Tests of a 0.182 Scale Model of an F4U-1 Airplane with External Stores, NACA RM L7E20, National Advisory Committee for Aeronautics, 1947.
307. L. E. Boddy and C. P. Morrill, Jr., The Aerodynamic Effects of Rockets and Fuel Tanks Mounted under the Swept-back Wing of an Airplane Model, NACA RM A7J03, National Advisory Committee for Aeronautics, April 1948.
308. D. L. Bennett, Wing Analysis for Model X-15 Airplane, Appendix II, Report NA-57-965, North American Aviation, August 1964.
309. P. Lehner, Static Stability Tests of the M-117 Bomb at Mach Numbers from 0.55 to 1.30 with Seven Tail Fin Configurations, AEDC-TR-68-103, Arnold Engineering and Development Center, May 1968.
310. L. L. Galigher, Static Stability Characteristics of the Tactical Fighter Dispenser with Various Tail-Fin Configurations at Mach Numbers from 0.30 to 1.20, AEDC-TR-69-93, Arnold Engineering and Development Center, April 1969.
311. J. Kukainis, Stability Characteristics of the BLU-52 Bomb at Mach Numbers from 0.3 to 0.9, AEDC-TR-69-105, Arnold Engineering and Development Center, May 1969.
312. J. A. Black, Store and Pylon Loads Tests of a 1/12-Scale Model of the F-111A Aircraft at Transonic Mach Numbers, AEDC-TR-70-184, Arnold Engineering and Development Center, July 1970.

313. W. E. Summers, Flow Field Characteristics and Aerodynamic Loads on External Stores near the Fuselage and Wing Pylon Positions of a Swept-Wing/Fuselage Model at Mach Numbers of 0.25 and 0.70, AEDC-TR-70-202, Arnold Engineering and Development Center, September 1970.
314. R. W. Butler, Separation Characteristics of the CBU-34 Dispenser from the F-105 Aircraft and the SUU-25B/A Flare Pod from the F-4C Aircraft, AEDC-TR-69-133, Arnold Engineering and Development Center, June 1969.
315. W. E. Summers, Separation Characteristics of the CBU-33/A Store from the F-4C Aircraft at Mach Numbers from 0.54 to 0.86, AEDC-TR-69-259, Arnold Engineering and Development Center, December 1969.
316. B. R. Daniel, Separation Characteristics of the SUU-25B/A Flare Pod from the F-4 Aircraft, AEDC-TR-69-26, Arnold Engineering and Development Center, February 1969.
317. R. W. Butler, Separation Characteristics of the SUU-25C/A from the F-4C, AEDC-TR-69-250, Arnold Engineering and Development Center, December 1969.
318. E. G. Allee, Jr., Parametric Study of Separation Characteristics of the M-117 Bomb from the F-4C Aircraft at Transonic Speeds, AEDC-TR-69-248, Arnold Engineering and Development Center, December 1969.
319. W. E. White, Evaluation of the Effects of Electronic Countermeasures Pods on Separation Characteristics of Three Stores from the F-4 Aircraft at Mach Numbers from 0.57 to 0.89, AEDC-TR-69-230, Arnold Engineering and Development Center, November 1969.
320. J. Kukainis, Separation Characteristics of the BLU-52 Bomb from the F-4C Aircraft, AEDC-TR-69-137, Arnold Engineering and Development Center, July 1969.
321. B. R. Daniel, Separation Characteristics of the SUU-16/23A Gun Pod from the F-4 Aircraft, AEDC-TR-69-23, Arnold Engineering and Development Center, February 1969.
322. E. A. Price, Jr., Parametric Wind Tunnel Study of the Separation Characteristics of a Bomb-Shaped Store from the Left Outboard Pylon of the F-4C Aircraft, AEDC-TR-68-258, Arnold Engineering and Development Center, November 1968.

323. F. J. Regan, Wind Tunnel Investigation of the MK 76 Practic Bomb (U), NAVORD report 6772, Naval Ordnance Laboratory, White Oak, Md., 14 September 1964.
324. J. E. Greene, Static Stability and Magnus Characteristics of the U.S. Navy 1000 lb. Low-Drag Bomb at Transonic Speeds, Aero Research Report 345 _____ (AN 132 012), U.S. Naval Ordnance Laboratory, 5 April 1957.
325. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
326. V. L. Schermerhorn, Static Stability Index and Aerodynamic Coefficients for the 0.125-Scale Model Mark 82 Low-Drag Bomb with Standard and Emntex Snakeye I Fins with Six Retardation Angles at Subsonic Speeds, NOLTR 69-100, U.S. Naval Ordnance Laboratory.
327. V. L. Schermerhorn, Static Stability and Axial Force Coefficients for the 0.125 Scale Model Mark 82 Low Drag Bomb with Closed Snakeye I Fins at Subsonic and Transonic Speeds, NOLTR 69-164, U.S. Naval Ordnance Laboratory, 17 September 1969.
328. F. J. Regan, et al, Static Wind Tunnel Tests of the MK-82 Free-Fall Store with Two Modified Stabilizers, NOLTR 69-217, U.S. Naval Ordnance Laboratory, 8 December 1969.
329. R. K. Florence, Shape 28 Study as Installed on the F-107A Airplane NAA Designation NA-212, NA-55-445, North American Aviation, Inc., April 1955.
330. Estimated Aerodynamic Data for the Design of the F-100A and F-100C Airplanes, NA-58-112 (Vol. IV), North American Aviation, Inc., 16 November 1959.
331. A. S. Dean and D. Crandall, F-100D Triple Ejector Rack Flight Test Program - Final Report, NA-67-268, North American Aviation, Inc., 10 May 1967.
332. R. D. Burtz, F-104 External Store Data, Report 17221, Lockheed-California Company, September 1963.
333. Feasibility Flight Test Evaluation of Outboard Wing Pylons and External Fuselage Fuel Tank (200 Gal.) F/RF-104G(MAP), Report No. 17736, Lockheed-California Company, March 1964.
334. L. H. Brown, High Speed Wind Tunnel Tests to Determine the Aerodynamic Characteristics of a .06 F-104G Airplane Equipped with Various External Stores, Report LR-19699, Lockheed-California Company.
335. F. E. Osberg, Demonstration Progress Report P-3A Minelaying Configuration, Report 14582A (Addm. A), Lockheed-California Company, November 1962.
336. C. E. McGlothlin, S-3A Stability and Control Investigation Test in the Lockheed 8' x 12' Low Speed Wind Tunnel, LR 23,767/LFL-L-306, Lockheed-California Company,

337. J. D. Boosa et al, Armament Characteristics Report for A-7A Aircraft, Report 2-51721/5R-1932, LTV Vought Aeronautics Division, February 1965.
338. F. J. Regan et al, Roll-Induced Force and Moment Measurements of the M823 Research Store, NOLTR 68-195, U.S. Naval Ordnance Laboratory, November 1968.
339. V. L. Schermerhorn and F. J. DeMeritte, Wind Tunnel Tests of the Navy Low-Drag Bomb at Angles of Attack up to 70 Degrees (U), NAVWEPS Report 7291, U.S. Naval Ordnance Laboratory, March 1961.
340. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
341. W. H. Miller et al, Performance Tests of the F-4B Airplane - Second Interim Report, Report FT-41R-66 (AD 486758), U.S. Naval Air Test Center, 26 May 1966.
342. Estimated Aerodynamic Data for the Design of the F-100A and F-100C Airplanes, Report No. NA-58-112, Vol. III, North American Aviation, Inc., 16 November 1959.
343. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
344. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
345. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
346. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
347. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
348. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
349. E. D. Howes, Jr. and T. J. Emma, Data Report of Series 5 CAL Transonic Wind Tunnel Tests of the 1/16 Scale Model A2F-1 (Installed Stores Phase), Report No. 128-WS-15, Grumman Aircraft Engineering Corp., 3 June 1959.

350. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
351. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
352. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
353. R. N. Hopko, Drag Near Zero Lift of a 1/7-Scale Model of the Convair B-58 External Store as Measured in Free Flight Between Mach Numbers of 0.8 and 2.45, RM SL 55G22A, National Advisory Committee for Aeronautics (Langley Aero Lab).
354. M. C. Pinney, Wind Tunnel Tests of a F-4D 5% Scale Model with the AIM-4D Installation in the McDonnell Polysonic Wind Tunnel - Series III (Volume I-VII), Report E211, McDonnell Aircraft Corporation, 10 January 1966 (revised 27 February 1967).
355. B. J. Buchmueller, Wind Tunnel Test on the 7.5% Scale F-4K/M Store Loads Model with United Kingdom Multiple Weapon Stores in the McDonnell Polysonic Wind Tunnel, Series I (Volumes I-IV), Report F 266, McDonnell Aircraft Corporation, 20 January 1967 (Revision A-21 June 1967).
356. M. C. Pinney, Wind Tunnel Tests of an F-4 7.5 Percent Scale Loads Model with the AIM-4D Installation in the McDonnell Polysonic Wind Tunnel - Series III (Volumes I-X), Report E 443, McDonnell Aircraft Corporation, 1 April 1966.
357. D. L. Miller, Wind Tunnel Tests on the 7.5 Percent F-4 Store Loads Model in the McDonnell Polysonic Wind Tunnel, Series III (Volumes I-II), Report E470, McDonnell Aircraft Corporation, 12 May 1966.
358. E. L. Vankirk, Wind Tunnel Tests on a 7.5 Percent Scale Model F-4 With TFD Finned Stores in the McDonnell Polysonic Wind Tunnel, Series I (Volumes I and II), Report G581, McDonnell Aircraft Corporation, 11 March 1969.
359. E. A. Cluchey, Wind Tunnel Tests to Determine the Drag and Stability Effects of AJ-168 Missiles on the 5 Percent Scale Model F-4K in the McDonnell Polysonic Wind Tunnel, Series III (Volume I-IV) (U), Report E599, McDonnell Aircraft Corporation, 15 June 1966.
360. B. J. Buchmueller, Wind Tunnel Tests on the 7.5 Percent Scale F-4 Store Loads Model in the McDonnell Polysonic Wind Tunnel for Loads Measurement on the Centerline Reconnaissance Pod-Series I, Report E 269, McDonnell Aircraft Corporation, 11 January 1966 (revised 17 February 1966).

361. B. J. Buchmueller, Wind Tunnel Tests on the 7.5 Percent Scale F-4 Store Loads Model with McDonnell Supersonic Multiple Bomb Racks (SMBR) in the McDonnell Polysonic Wind Tunnel, Series I (Volume I-IV), Report F402, McDonnell Aircraft Corporation, 4 March 1966.
362. R. W. Arden, Wind Tunnel Tests on the 5 Percent Scale Model F-4K/M Aircraft with Multiple Stores in the McDonnell Polysonic Wind Tunnel - Series IV (Volumes I and II) (U), Report F416, McDonnell Aircraft Corporation, 24 April 1967.
363. J. D. Mossa, Wind Tunnel Tests of an F-4D 7.5 Percent Scale Model with Conventional Weapons in the McDonnell Douglas Polysonic Wind Tunnel - Series I (Volumes I-IV), Report F634, McDonnell Aircraft Corporation, 24 August 1967.
364. J. D. Mossa, Wind Tunnel Tests of the Red Flame II Pod on the 7.5 Percent Scale Model F-4 Aircraft in the McDonnell Polysonic Wind Tunnel - Series I, Report F602, McDonnell Aircraft Corporation, 13 October 1967.
365. J. E. Gregoire, Wind Tunnel Tests on the 7.5% F4C Store Loads Model in the McDonnell Polysonic Wind Tunnel, Series III (Volumes I-XII), Report A879, McDonnell Aircraft Corporation, 31 January 1965 (revisions May 1965 and August 1965).
366. J. E. Gregoire, Wind Tunnel Tests on the Five Percent Scale Model F-4D Aircraft (With Multiple Weapons) in the McDonnell Polysonic Wind Tunnel - Series V, Report F902, McDonnell Aircraft Corporation, 11 March 1968.
367. E. A. Cluchey, Wind Tunnel Tests on the 7.5 Percent Scale F-4C/D Store Loads Model with Conventional Weapons Stores in the McDonnell Polysonic Wind Tunnel - Series I (Volumes I-III) (U), Report E979, McDonnell Aircraft Corporation, 29 December 1966.
368. J. E. Gregoire, Wind Tunnel Tests on the Five Percent Scale Model F-4D Aircraft (With Multiple Weapons) in the McDonnell Polysonic Wind Tunnel, Series VI, Report F990, McDonnell Aircraft Corporation, 11 March 1968.
369. J. A. Dougherty, Transonic Tests on the 7.5% F-4B Store Loads Model Conducted in the McDonnell Polysonic Wind Tunnel, Series I (Volumes I-III), Report 9212, McDonnell Aircraft Corporation, February 1963.
370. J. D. Holmes, Transonic Tests of a 5% Scale F-101 ECM Pod Loads Model in the MAC Polysonic Wind Tunnel - Series I, Report 9406, McDonnell Aircraft Corporation, February 1963.
371. Aircraft Performance, Stability, and Control Test in the Aerodynamic Wind Tunnel (4T), AEDC Test No. PC0114 (TC 129), Arnold Engineering and Development Center, December 1970.
372. D. Williams, Incremental Drag of the QRC-160 Store on the Outboard Wing Pylons with 450 Gallon Fuel Tanks Installed on the Inboard Wing Pylons of the F-105 Airplane, Engineering Flight Report 71-2.3.1 (FHR 2870-3) Fairchild Hiller/Republic Aviation Division, 29 April 1966.

373. C. Dragowitz, Estimated Airloads on Pylon Suspended External Stores on the F-105 Airplane, EAR-414, Fairchild Hiller/Republic Aviation Division, November 1957.
374. F. Higgins, Structural Flight Tests of F-105D (D-10) Airplane M-117 Bombs on Outboard Pylons plus 450 Gallon Tanks on Inboard Pylons - Store-Pylon Loads During Symmetrical and Unsymmetrical Maneuvers, Engineering Flight Report 162-II (RAC 983), Fairchild Hiller/Republic Aviation Corporation, December 1962.
375. W. Marzillier, Structural Flight Test of F-105D (D-10) Airplane with BLU-1B Firebombs on Outboard Pylons Plus 450 Gallon Tanks (Empty) on Inboard Pylons - Store-Pylon Loads During Symmetrical and Unsymmetrical Maneuvers, Engineering Flight Report 162-I (RAC 983), Fairchild Hiller/Republic Aviation Corporation, December 1962.
376. J. Stepsis, Detachment Four External Store Program No. 1 - Structural Integrity Testing of Single and Multiple Carriage Configurations on the F-105D Airplane, Engineering Flight Test Report No. 269 (RAC 1267-12), Fairchild Hiller/Republic Aviation Corporation, April 1964.
377. D. Williams, Incremental Drag of Selected Conventional Stores on the Wing Pylons of the F-105B Aircraft, Engineering Flight Test Report-202, Fairchild Hiller/Republic Aviation Corporation, September 1962.
378. J. Mihalo, In-flight Loads Measured on the Fuselage Mounted Multiple Ejector Rack During Survey and Demonstration Maneuvers with (6) M-117, 750# Bombs, F-105D (D-86) Airplane USAF S/N 59-1774, Engineering Flight Test Report No. 250, Fairchild Hiller/Republic Aviation Corporation, July 1963.
379. J. Stepsis, Flight Test of F-105D-86 Airplane Load Survey of 8-750 lb. Bomb (M-117) Configuration Mounted on Inboard Multiple Ejector Racks, Engineering Flight Report No. 252, Fairchild Hiller/Republic Aviation Corporation, August 1963.
380. L. Lipsius, Transonic Drag Characteristics of a 1/22-Scale Model of the F-105D Airplane with Various External M-43 Bomb Configurations Tested in the NASA 8-Ft. Transonic Pressure Tunnel, EAR-496, Fairchild Hiller/Republic Aviation Corporation, December 1963.
381. L. Lipsius, Addendum "A" - Transonic Drag Characteristics of a 1/22-Scale Model of the F-105 with Various External Store Configurations Tested in the Cornell Aeronautical Laboratory, 8 Ft. Wind Tunnel, RAC Report No. 2016 (EAR-495), Fairchild Hiller/Republic Aviation Corp., April 1964.
382. J. Stepsis, Detachment Four External Store Program No. 2 Structural Integrity Testing of Single and Multiple Carriage Configurations on the F-105D Airplane, Engineering Flight Report 70.1.1.1 (RAC 2364-2), Fairchild Hiller/Republic Aviation Corporation, November 1964.

383. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
384. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
385. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
386. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
387. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
388. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
389. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
390. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
391. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
392. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
393. Flight Manual F/RF/TF-104G T.O. 1F-104G-18-34, June 1971 (Revision).
394. T. S. West, Northrop F-5A/B Incremental Store Effects (Drag, Lift, Pitch and Store Loads), AR-71-6, Northrop Corporation Aircraft Division, March 1971.

395. J. A. Flechtner, Static Stability Test on a 0.042 Scale F8U-2N Model to Obtain the Aerodynamic Effects of Various Wing-Pylon Mounted Stores, Report No. 2-597102R90 (HSWT #61), Chance Vought Corporation, Aeronautics and Missiles Division, June 1962.
396. A-6 Aircraft Stability Data, Engineering Letter ENG-AER-LTR/71-9, Grumman Aerospace Corporation, June 1971 (Selected Data).
397. H. Styne, A-7E Flight Drag Data Analysis, (Selected Data), LTV Aerospace Corporation, March 1971.
398. A. K. Chapman, et al., Performance Data for the TA-4F Airplane, DAC 33078, Douglas Aircraft Company, Inc., August 1968.
399. F-105D Performance Report, EAR 490, Republic Aviation Corporation.
400. RA-5C Performance Report, Report No. NR69H-2, Columbus Division of North American-Rockwell Corporation.
401. J. A. Blackwell, Jr., A Finite-Step Method for Calculation of the Theoretical Load Distributions for Arbitrary Lifting-Surface Arrangements at Subsonic Speeds, TND-5335, National Aeronautics and Space Administration (Langley), July 1969.
402. J. A. Flechtner, Static Stability Tests on the .05 Size A-7 in the VAD 4' x 4' High Speed Wind Tunnel at Transonic Mach Numbers (HSWT Test No. 384), Report No. 2-59710/OR-8381, LTV Aerospace Corporation (VAD), July 1970.
403. D. M. Box, Static Stability Test on the .05 Scale A-7D Airplane Model with a Model with a Number of ECP-134R Stores Configurations-Third Series High Speed Force, Report No. 2-59710/1R-8426, LTV Aerospace Corporation, January 1971.
404. J. K. Quermann, et al., Analysis of Wind Tunnel Tests of the Effects of Sparrow II and Other Stores Mounted on the XF8U-1 Airplane (First Series .02 Size Model at Pt. Mugu), CVA Report 9623, LTV Aerospace Corporation, February 1955.
405. D. M. Box, et al., Static Stability Test on the .05 Scale A-7D Airplane Model with a Number of ECP-134R Stores Configurations - Second Series Force (HSWT Test 389), Report 2-59710/OR-8421, LTV Aerospace Corporation, December 1970.
406. E. E. Covert and J. R. Van Gaasbeek, Survey of the Literature on Aerodynamic Interference at Slightly Supersonic Speeds, Technical Report 171, Massachusetts Institute of Technology, December 1970.
407. W. C. Heald, "Test and Estimation Techniques for Determination of External Store Effects on Aircraft Neutral Point", Technical Paper presented at Aircraft-Stores Compatibility Symposium, Wright-Patterson Air Force Base, December 1971.

408. F. K. Goodwin, et al., "Method of Predicting Loading and Trajectories of Single or TER or MER Mounted Stores on Swept-Wing Aircraft", Technical Paper presented at Aircraft-Stores Compatibility Symposium, Wright-Patterson Air Force Base, December 1971 (AFFDL-TR-72-67, Vol. I-III).
409. P. Marsden and A. B. Haines, Aerodynamic Loads on External Stores: A Review of Experimental Data and Methods of Prediction (U), A.R.A. Report No. 5 (or R&M Report No. 3503) Vol. I and II, Aircraft Research Association Ltd., Great Britain, November 1962.
410. F. Dan Fernandes, "Theoretical Prediction of Interference Loading on Aircraft Stores at Subsonic and Supersonic Speeds", Technical Paper presented at Ninth Navy Aeroballistics Symposium, Applied Physics Laboratory, Johns-Hopkins University, Howard County, Maryland, May 1972.
411. F. W. Martin, Mutual Aerodynamic Interference Effects for Multiple Bodies by the Cross-Flow Correction Method, Technical Report AFATL-TR-71-69, Air Force Armament Laboratory, Eglin AFB, June 1971.
412. F. W. Martin, Cross-Flow Corrected Axisymmetric Solution for Multiple Body Interference, Technical Report AFATL-TR-71-109, Air Force Armament Laboratory, Eglin AFB, August 1971.
413. Willard E. Summers, Aerodynamic Loads Data on the M-117 Bomb in the Flow Field of the Triple Ejection Rack at Mach Numbers from 0.5 to 1.3, AEDC-TR-72-81 (AFATL-TR-72-101), (PWT) Arnold Engineering and Development Center, Arnold Air Force Station, June 1972.
414. F. D. Fernandes, Theoretical Prediction of Interference Loading on Aircraft Stores, Part III-Programmers Manual, NASA CR-112065-3, (N72-26023), NASA Langley Research Center (General Dynamics-Electro Dynamic Division), June 1972.
415. B. Jaffe and G. V. L. Rao, Study of Generalized Safe-Launch Bounds for External Stores - Final Report, (Advance Copy) Aerodynamics Laboratory, Naval Ships Research and Development Center (G. V. R. Rao and Associates), revised 20 October 1967.
416. W. J. Monta, Supersonic Aerodynamic Characteristics of an Air-to-Air Missile Configuration with Cruciform Wings and In-Line Tail Controls(U), NASA TMX-2666, December 1972.
417. C. F. Markarian and C. M. Martin, Aircraft-Missile Interference Effects, Paper presented at Seventh U.S. Navy Symposium on Aeroballistics, Naval Missile Center, Pt. Mugu, California, 7-9 June 1966.
418. D. A. Jones III, Some Aspects of the Aircraft Store Separation Problem, U.S. Naval Weapons Laboratory, N. W. L. Technical Report TR-2206, September 1968.
419. C. B. Mathews, Evaluation of the Conformal Carriage Concept on the Performance and Basic Static Longitudinal Stability of the F-4E Aircraft, Air Force Armament Laboratory, Report AFATL-TR-71-76, July 1971.

420. E. W. Lorson, The Effects of External Stores on the Longitudinal Static Stability of Aircraft, Department of Aeronautics, USAF Academy, DFAN TR-72-2, June 1972.
421. C. L. Turner, Aerodynamic Interference Between a Wing and a Store, USAF Institute of Technology, GA/MC/72-6, June 1972.
422. B. Levenetz, Variable Geometry Fuel Tank, Air Force Flight Dynamics Lab, Report AFFDL-TR-71-145, December 1971.
423. J. M. Schwindle, Compatibility Test of the LAU-68A/A Rocket Launcher with the F-100 Aircraft, Armament Development and Test Center, ADTC Report TR-72-24, March 1972.
424. G. E. Ziege, Compatibility Test of the BLU-27A/B Unfinned Firebomb on the F-4 Aircraft, Armament Development and Test Center, ADTC Report TR-72-100, October 1972.
425. T. P. Lutterbie, Test of High Density Bombs (BLU-58/B) on the F-111 Aircraft, Armament Development and Test Center, ADTC Report TR-71-55, April 1971.
426. J. F. Reagan, Exterior Ballistic Analysis of General Purpose Bomb Mark 84 Assembled with 14-inch Suspension Adapter, Naval Weapons Laboratory, NWL Technical Report TR-2472, October 1972.
427. G. S. Wheat, Exterior Ballistics Analysis of Bomb Mark 82/Snakeye/Unretarded, Naval Weapons Laboratory, NWL Technical Report TR-2520, June 1971.
428. R. E. Davis, Longitudinal Static Stability and Drag Characteristics of A-7D and F-4E Aircraft with Various External Store Configurations at Transonic Speeds, Arnold Engineering and Development Center, Report AEDC-TR-71-54, April 1971.
429. R. H. Roberts, Separation Characteristics of the Tactical Fighter Attack Flare from the F-4C Aircraft at Mach Numbers from 0.5 to 0.95, Arnold Engineering and Development Center, Report AEDC TR-70-188, August 1970.
430. J. Kukainis and R. H. Roberts, Separation Characteristics of Six Stores from the A-7D Aircraft at Mach Numbers from 0.42 to 0.95, Arnold Engineering and Development Center, Report AEDC TR-70-19, January 1970.
431. D. K. Smith, Longitudinal Static Stability and Drag Characteristics of F-4D Aircraft with Various External Store Configurations at Transonic Speeds, Arnold Engineering and Development Center, Report AEDC TR-71-162, August 1971.
432. R. E. Smith, Prediction of Store Separation Motion Using Initial Captive Loads, Naval Weapons Center, Report NWC TP 5261, October 1971.

433. J. Weber and M. G. Joyce, Interference Problems on Wing-Fuselage Combinations. Part II Symmetrical Unswept Wing at Zero Incidence Attached to a Cyclindrical Fuselage at Zero Incidence in Midwing Position, RAE Technical Report 71179, August 1971.
434. W. D. Bauer and R. E. Detrick, Developmental and Demonstration Testing of A-7 Aircraft Having the TF 30-P-408 Engine Installed, Naval Armament Test Center, NATC Report FT-109R-71, December 1971.
435. F. C. Hood, D. O. Gobert and C. P. Winters, F-111E Flying Qualities Tests, Air Force Flight Test Center, Edwards AFB, Report AFFTC-TR-72-144, November 1972.
436. G. F. Rhodes, Strength Analysis Report Production Engineered SUU-14/A Dispenser, Aerojet-General Corp., Report 0918-01(01)ER, November 1964.
437. P. Rubin, Aircraft/Munition Compatibility Data Report on CBU-60/A Aircraft Dispenser and Bomb, Aerojet-General Corp., Report 1306-01 (06)ER, June 1969.
438. W. K. Shortridge, Summary Report of Wind Tunnel Tests and Aerodynamic Analysis on SUU-45/A Bomb Dispenser, Aerojet-General Corp., Report 1378-10(11)ER, March 1970.
439. W. E. Summers, Separation Trajectories for the SUU-51B/B Store from the F-4C Aircraft, Arnold Engineering and Development Center, Report AEBC-TR-72-91, June 1972.
440. J. Kukainis, Separation Characteristics of the ALE-38 Chaff Dispenser from the F-4C and F-4E Aircraft, Arnold Engineering and Development Center, Report AEBC-TR-72-84, June 1972.
441. J. Kukainis, Separation Characteristics of the LAU-68 A/A Rocket Launcher from the F-105 Aircraft, Arnold Engineering and Development Center, Report AEBC-TR-72-128, September 1972.
442. D. W. Hill, Jr., Aerodynamic Loads on Four External Stores in the Carriage Position on the F-4C Aircraft at Mach Numbers from 0.7 to 1.2, Arnold Engineering and Development Center, Report AEBC-TR-71-71, April 1971.
443. J. B. Carman, Separation Characteristics of the ASP Dispenser Munition from the F-4C Aircraft at Mach Numbers from .66 to 1.2, Arnold Engineering and Development Center, Report AEBC-TR-72-8, January 1972.
444. R. D. Herron, Aerodynamic Development Program for an Advanced Tactical Rocket Launcher, Arnold Engineering and Development Center, Report AEBC-TR-72-76, June 1972.
445. R. W. Butler, Evaluation of SACMI and HAST Airloads at the F-4C Centerline Carriage Position for Subsonic and Transonic Mach Numbers, Arnold Engineering and Development Center, Report AEBC-TR-72-144, March 1972.

446. R. H. Roberts, Flow-Field Characteristics and Aerodynamic Loads on External Stores Near the Fuselage and Wing Pylon Positions of a Swept-Wing/Fuselage Model at Mach Numbers of 0.40 and 0.70 - Phase IV, Arnold Engineering and Development Center, Report AEDC-TR-71-208, October 1971.
447. W. E. White and D. A. McLanahan, Store and Pylon Loads Test of a 1/2 Scale Model of the F-111A Aircraft at Transonic Mach Numbers, Arnold Engineering and Development Center, Report AEDC-TR-71-7, January 1971.
448. R. H. Roberts, Flow-Field Characteristics and Aerodynamic Loads on External Stores near the Fuselage and Wing Pylon Positions of a Swept-Wing/Fuselage Model at Mach Numbers 0.40 and 0.70 - Phase III., Arnold Engineering and Development Center, Report AEDC-TR-71-73, April 1971.
449. F. D. Fernandes, "Prediction of Interference Loading on Aircraft Stores at Supersonic Speeds", Journal of Aircraft, Vol. 8, No. 8, August 1971.
450. W. N. MacDermott and P. W. Johnson, Calculation of Forces on Aircraft Stores Located in Disturbed Flow Fields for Application in Store Separation Prediction, Arnold Engineering and Development Center, Report AEDC-TR-71-186, November 1971.
451. Capt. L. C. Convers, L. Mahood, and B. Levenetz, "Variable Geometry External Fuel Tanks," AIAA Paper No. 71-395 presented at AAS/AIAA Variable Geometry and Expandable Structures Conference, Anaheim, California, April 21-23, 1971.
452. W. R. Chadwick, "The Application of Non-Planar Lifting Surface Theory to the Calculation of External-Store Loads", AIAA Paper No. 72-971 presented at AIAA 2nd. Atmospheric Flight Mechanics Conference, Palo Alto, California, September 11-13, 1972.
453. Leveille Mahood, "Integral Variable Geometry Fuel Tankage", AIAA Paper No. 71-763 presented at AIAA 3rd. Aircraft Design and Operations Meeting, Seattle, Washington, July 12-14, 1971.
454. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
455. W. S. Thomas, The David Taylor Model Basin 7- By 10-Foot Transonic Wind Tunnel Facility, David Taylor Model Basin Aerodynamics Laboratory, Aero Report 985, July 1960.
456. F. D. Fernandes, Theoretical Prediction of Interference Loading on Aircraft Stores, NASA CR-112065-2, June 1972.
457. W. E. Grahame and J. R. Stevens, Compilation of External Store Drag, Northrop NORAIR, Report NOR 67-257, January 1968.
458. O. J. D'Amato and J. A. Engelland, Preliminary Design Report of the F-101B HAST Compatibility Program, Beech Aircraft Company, Report No. 1070E344 MER, January 1973.

459. J. Kelly, Production Data Package 150 Gallon External Fuel Tank, Naval Air Development Center, Report NADC-72031-VI, March 1972.
460. E. W. Falkowski, Subsonic Aerodynamic Characteristics of an 18% Scale Model of the M117 750-LB Bomb with Folding Fins, Engineering Sciences Laboratory Picatinny Arsenal, Technical Report 4096, December 1970.
461. D. O. Gobert and Maj. L. D. Fortner, Military Evaluation (Flying Qualities) of the A-7D with Expanded Aft Center of Gravity Limits, USAF Flight Test Center, Substantiating Document No. 71-8, April 1971.
462. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
463. F. E. West, Jr. et al., Effect of Forebody Modifications on the Aerodynamic Characteristics of a Simulated Aircraft Store at Mach Numbers from 0.5 to 1.17, David Taylor Model Basin Aerodynamics Laboratory, Aero Report 1103, March 1966.
464. R. M. Sadler, External Stores Separation under Subsonic Conditions Phase II - Part I, Northwestern University Aerial Measurements Laboratory, Memo 331, April 1961.
465. R. E. Davis and R. W. Crowl, Transonic Separation Characteristics of 600-Gal. Fuel Tanks from F-111 Aircraft, Arnold Engineering and Development Center, Report AEDC-TR-70-63, March 1970.
466. J. L. Downs, SUU-46/A Supersonic High Density Bomb Pod Yaw Brace Design and Structural Analysis, Air Force Armament Laboratory, Report AFATL-TR-71-15, February 1971.
467. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
468. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
469. O. J. D'Amato, Final Design Report of the F-101B/HAST Compatibility Program, Beech Aircraft Corporation, Report 1070E365 MER, April 1973.
470. J. V. Haldy, Low Speed Wind Tunnel Tests of a .45 Scale Model of the Beech Aircraft Corporation Model 1089 Vehicle Volume I of II, General Dynamics Convair Division, Report GDLST 617, December 1972.
471. J. E. Moore, Summary of the Aerodynamic Characteristics of the HAST Target Missile Obtained from AEDC Wind Tunnel Tests, Beech Aircraft Corporation, Report 1070E203 MER, September 1971.

472. J. W. Onsott and W. J. Werback, Computation of Captive Flight Loads on Air-Carried Weapons, Naval Weapons Center, Report NWC TP 5235, September 1971.
473. J. E. Moore, Summary of the Aerodynamic Characteristics of the HAST Target Missile, Beech Aircraft Corporation, Report 1070E340 MER, January 1973.
474. External Fuel and Special Purpose Stores, Sargent-Fletcher Company.
475. J. D. Woodward, Incremental Drag Measurements of External Stub Pylon and Stores, The Boeing Company, Airplane Division, Report D3-6935, February 1966.
476. D. Sutcliffe, T. Waldeck, and G. E. Hudson, Aerodynamic Characteristics of the External AGM-69A Missile Installation on the B-52 Airplane, The Boeing Company, Wichita Division, Report D3-7801, August 1968.
477. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
478. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
479. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
480. E. G. Allee, Jr., Separation Characteristics of Various Stores When Released from a Vertical or Multiple Ejection Rack Mounted on F-4C and A-7D Aircraft at Mach Numbers from 0.54 to 0.95, Arnold Engineering and Development Center, Report AEDC-TR-70-112, May 1970.
481. W. E. White, Investigation of the Static Stability and Store Separation Characteristics of the Sandpiper Target Missile at Transonic Mach Numbers, Arnold Engineering and Development Center, Report AEDC-TR-70-97, May 1970.
482. E. A. Price, Jr., Wind Tunnel Studies of the A/B 45Y-4 Spray Tank Separation Characteristics from the Left Outboard Pylon of the F-105 Aircraft, Arnold Engineering and Development Center, Report AEDC-TR-68-185, August 1968.
483. J. Kukainis, Wind Tunnel Tests to Determine the Separation Characteristics of the Tactical Fighter Dispenser When Ejected from the F-105 Aircraft, Arnold Engineering and Development Center, Report AEDC-TR-68-179, September 1968.

484. W. J. Bonnie, et al., Model F/RF-4B-C Aerodynamic Derivatives, McDonnell Aircraft Corporation, Report 9842, February 1964.
485. D. E. Drake and R. E. Watzke, Model TA-4E Estimated Flying Qualities, Douglas Aircraft Corporation, Report LB-31981, August 1967.
486. C. F. Anderson, S-3A Aerodynamic Stability and Control and Flying Qualities Report, Lockheed-California Company, Report LR23462-3, March 1970.
487. L. M. Evans, S-3A Basic Data Report, Lockheed-California Company, Report LR24726, October 1971.
488. C. L. Hendrickson, F-111A Category II Performance Evaluation, Air Force Flight Test Center, Report FTC-TR-72-54, February 1973.
489. B. M. Ryan, Analytical Techniques for the Determination of Flow Fields About Aircraft-Store Combinations, Naval Weapons Center, Technical Note 4061-167, April 1973.
490. J. C. Orwat, Weapon Delivery Evaluation of an F-4C Aircraft with A High-Gain Adaptive Control Augmentation System, Air Force Flight Test Center, Report FTC-TR-71-35, August 1971.
491. J. R. Myers, Separation Characteristics of the B-57 Bomb from the F-4C Aircraft Equipped with ECM Pods at Mach Numbers from 0.605 to 1.3, Arnold Engineering and Development Center, Report AEDC-TR-72-93, June 1972.
492. A. C. Mansfield, Separation Characteristics of the Pave Storm I and II from the F-4C Aircraft at Mach Numbers from 0.50 to 0.95, Arnold Engineering Development Center, Report AEDC-TR-71-179, September 1971.
493. R. W. Butler, Separation Characteristics of the M-117 GxPx, MK-82GP, MK-82SE, and CBU-24B/B Stores from the A-7D Aircraft at Mach Numbers from 0.735 to 0.95, Arnold Engineering Development Center, Report AEDC-TR-71-12, January 1971.
494. J. E. Brunk, Aerodynamic Dispersion Techniques, Air Force Armament Laboratory, Report AFATL-TR-70-123, November 1970.
495. D. Hill, Jr., Investigation of the Separation Characteristics of Various Stores from the A-7D Aircraft at Mach Numbers from 0.34 to 0.95, Arnold Engineering Development Center, Report AEDC-TR-71-188, September 1971.
496. E. J. Helin, Aerodynamic Data for Structural Design, Lockheed-California Company, Report LR24687, September 1971.
497. J. D. Boosa, et al., Armament Characteristics Report for A-7D Aircraft, LTV Aerospace Corporation, Vought Aeronautics Division, Report 2-51721/9R-8246, March 1969.

498. E. C. Rooney, Development of Techniques to Measure In-Flight Drag of a U.S. Navy Fighter Airplane and Correlation of Flight Measured Drag with Wind Tunnel Data, Paper presented at AGARD Fluid Dynamics Panel, Izmir, Turkey, April 1973.
499. C. F. Anderson and J. R. Henson, Aerodynamic Characteristics of Several Bluff Bodies of Revolution at Mach Numbers from 0.6 to 1.5, Arnold Engineering Development Center, Report AEDC-TR-71-130, July 1971.
500. J. Kukainis, Separation Characteristics of the Suu-51/B From the F-4C Aircraft, Arnold Engineering Development Center, AEDC-TR-71-129, July 1971.
501. J. M. Whoric, Aerodynamic Characteristics of a Fluidic-Controlled Anti-Tank Missile with Curved Fins at Mach Numbers from 0.2 to 1.3, Arnold Engineering Development Center, Report AEDC-TR-71-116, July 1971.
502. J. Kukainis, Separation Characteristics of Six Stores from the A-1D Aircraft at Mach Numbers from 0.35 to 0.95, Arnold Engineering Development Center, AEDC-TR-70-232, October 1970.
503. F. K. Hube, Aerodynamic Characteristics of a Fluidic-Controlled Anti-Tank Missile at Mach Numbers from 2.0 to 3.0, Arnold Engineering Development Center, AEDC-TR-71-158, August 1971.
504. W. E. Summers, Effects of Variations in Triple-Ejection-Rack-Fairing Geometry on Separation Characteristics of Two Stores from the F-4C Aircraft, Arnold Engineering Development Center, AEDC-TR-72-197, December 1972.
505. A. G. Ryman and R. E. Palmer, Jr., Category II Performance and Qualitative Stability and Control Tests of the O-2A Aircraft, Air Force Flight Test Center, Report FTC-TR-68-15, February 1969.
506. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
507. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
508. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.

509. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
510. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
511. D. K. Smith, Static Stability and Drag Characteristics of the All-Altitude Spin-Projected Munition at Mach Numbers from 0.5 to 1.2, Arnold Engineering Development Center, Report AEDC-TR-71-230, October 1971.
512. R. A. Paulk, Separation Characteristics of the Redesigned LAU-61/A Rocket Launcher from the F-4C Aircraft at Mach Numbers from 0.53 to 0.94, Arnold Engineering Development Center, Report AEDC-TR-72-47, March 1972.
513. R. H. Roberts, Separation Characteristics of Several External Stores from the A-7D Aircraft at Mach Numbers from 0.325 to 0.95, Arnold Engineering Development Center, Report AEDC-TR-72-95, July 1972.
514. R. E. Dix, A Review of Methods of Measuring Aerodynamic Forces and Moments Acting on Captive Stores in Wind Tunnel Tests, Arnold Engineering Development Center, Report AEDC-TR-72-108, August 1972.
515. J. M. Whoric, Aerodynamic Characteristics of Several Low Aspect Ratio Stabilizer Fins at Mach Numbers from 0.8 to 1.3, Arnold Engineering Development Center, Report AEDC-TR-72-143, September 1972.
516. R. A. Paulk, Static Stability Characteristics of the Pave Rock 2.75-Inch-Diameter Rocket with Biconic and Ogive Noses at Mach Numbers from 0.3 to 2.0, Arnold Engineering Development Center, Report AEDC-TR-73-1, January 1973.
517. D. W. Hill, Jr., Separation Trajectories of Various Munitions When Released from the A-7D Aircraft at Mach Numbers from 0.33 to 0.95, Arnold Engineering Development Center, Report AEDC-TR-73-37, February 1973.
518. S. C. Korn, Use of the Flow Angularity Technique for Predicting Store Separation Trajectories, Air Force Armament Laboratory, Report AFATL-TR-71-140, October 1971.
519. E. S. Sears, An Empirical Method for Predicting Aerodynamic Coefficients for Projectiles - Drag Coefficient, Air Force Armament Laboratory, AFATL-TR-72-173, August 1972.
520. L. A. Trobaugh, Performance Comparison of Two Interim Conformal Carriage Systems on Three Navy Combat Aircraft, Naval Ship Research and Development Center, Report Technical Note AL-278, November 1972.

521. P. Lehner, Wind Tunnel Investigation of the Separation Characteristics of a 600-Gal Fuel Tank and Pylon from the FB-111 Aircraft, Arnold Engineering Development Center, Report AEDC-TR-69-45, February 1969.
522. D. K. Smith, Pressure Distributions and Force and Moment Coefficients for Several Configurations of the RAM Air Decelerator Stabilized Munition at Mach Numbers from 0.2 to 1.2, Arnold Engineering Development Center, Report AEDC-TR-73-27, February 1973.
523. R. W. Butler, Separation Characteristics of the LAU-68A/A Rocket Launcher from the F-4C and F-4E Aircraft at Mach Numbers from 0.37 to 0.90, Arnold Engineering Development Center, Report AEDC-TR-71-136, July 1971.
524. S. C. Korn, A Parametric Study of the Effects of Static Margin and Ejector Force on Separation Trajectories of M-117 Bombs from In-board Triple Ejector Rack Stations on F-4C Aircraft, Air Force Armament Laboratory, Report AFATL-TR-71-68, June 1971.
525. R. M. Rogers, Aerodynamic Characteristics of Several Bluff Body Configurations at Subsonic and Transonic Mach Numbers, Air Force Armament Laboratory, Report AFATL-TR-72-25, February 1972.
526. S. C. Korn, Validation and Expansion of the Flow Angularity Technique for Predicting Separation Trajectories, Air Force Armament Laboratory, Report AFATL-TR-72-184, September 1972.
527. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
528. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
529. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
530. C. B. Mathews, Evaluation of the Conformal Carriage Concept on the Performance and Basic Static Longitudinal Stability of the F-4E Aircraft, Air Force Armament Laboratory, Report AFATL-TR-71-76, July 1971.
531. W. E. Summers, Separation Trajectories for the SUU-51B/B Store From the F-4C Aircraft, Arnold Engineering Development Center, Report AEDC-TR-72-91, June 1972.

532. J. C. Donaldson, Wind Tunnel Investigation of Aerodynamic Loads on Weapons Separated from Carriage Under the Wing of a Tactical Fighter Aircraft at Supersonic Speeds, Arnold Engineering Development Center, AEDC-TR-73-93, June 1973.
533. H. Kaupp, Static Stability and Control Characteristics of BQM-34F Aerial Target with Large Wing-Tip Pods at Transonic Mach Numbers, Arnold Engineering Development Center, AEDC-TR-72-31, March 1972.
534. D. W. Hill, Jr., Aerodynamic Loads on Four External Stores in the Carriage Position on the F-4C Aircraft at Mach Numbers from 0.70 to 1.2, Arnold Engineering and Development Center, Report AEDC-TR-71-71.
535. E. M. Friedman, et al., Static Aerodynamic Characteristics of a One-Third Scale Model of the SUU-7A/A Aircraft External Store, Picatinny Arsenal, Technical Memorandum 1451, June 1964.
536. R. C. Crane and S. R. Boyd, Volume I of II F-111D Category II Performance Tests, Air Force Flight Test Center, Report FTC-TR-72-36, September, 1972.
537. D. W. Hill, Jr., Separation Trajectories of Modular Weapon Stores with Various Nose and Tail Geometries from the F-4C Aircraft, Arnold Engineering Development Center, Report AEDC-TR-72-182, December 1972.
538. W. E. Summers, Separation Characteristics of Six Stores from the A-7D Aircraft at Mach Numbers from 0.325 to 0.814, Arnold Engineering Development Center, Report AEDC-TR-72-146, October 1972.
539. P. R. Gord, Experimental Test Results and Comparisons with Simple Theory for the FDL-6C Configuration at Subsonic Mach Numbers, Air Force Flight Dynamics Laboratory, AFFDL-TR-71-2, August 1971.
540. V. E. Studwell, Aerodynamic Compatibility of the Advanced Tactical Rocket Launcher on the F-4 Aircraft, Air Force Armament Laboratory, Report AFATL-TR-71-81, July 1971.
541. D. W. Hill, Jr., Separation Characteristics of the M-117 Retarded Bomb, Finned BLU-IC/B Bomb, and SUU-42/A Dispenser from the A-7D Aircraft at Mach Numbers from 0.33 to 0.95, Arnold Engineering Development Center, Report AEDC-TR-71-261, December 1971.
542. D. Hill, Jr., Separation Characteristics of Various Stores from the A-7D Aircraft at Mach Numbers from 0.33 to 0.91, Arnold Engineering Development Center, Report AEDC-TR-71-93, May 1971.
543. W. E. Summers, Aerodynamic Loads Survey Data on the AGM-69A Missile in the Vicinity of the Weapon Bays of the B-1 Air Vehicle at Transonic Speeds, Arnold Engineering Development Center, Report AEDC-TR-71-206, October 1971.

544. A. C. Mansfield, Separation Characteristics of the LAU-69/A Rocket Launcher from the F-4C Aircraft at Mach Numbers from 0.29 to 0.78, Arnold Engineering Development Center, Report AEDC-TR-71-228, October 1971.
545. J. M. Whoric, Captive-Trajectory Store-Separation Characteristics of the SUU-51/B with Modified Tail Fins from the F-4C Aircraft, Arnold Engineering Development Center, Report AEDC-TR-71-222, October 1971.
546. J. R. Myers, Separation Characteristics of the MK-20 (Rockeye) Laser-Guided Dispenser Munition from the F-4C Aircraft at Mach Numbers from 0.66 to 0.90, Arnold Engineering Development Center, Report AEDC-TR-71-167, August 1971.
547. P. T. Eaton and C. S. Swinney, Incremental Lift and Drag of an External Aircraft-Phase I, David Taylor Model Basin, Report AL20, July 1965.
548. D. K. Smith and R. C. German, Aerodynamic Characteristics of Low Aspect Ratio Fins at Mach Numbers from 0.80 to 1.30, Arnold Engineering Development Center, Report AEDC-TR-71-74, April 1971.
549. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
550. E. E. Covert, On the Definition of a Safe Separation Criteria for External Stores and Pilot Escape Capsules, Massachusetts Institute of Technology Aerophysics Laboratory, Technical Report 163, December 1969.
551. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
552. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
553. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.

554. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
555. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
556. R. H. Roberts, Separation Characteristics of the SUU-51 Laser-Guided Dispenser Munition from the F-4C Aircraft (U), Arnold Engineering Development Center, August 1971.
557. D. K. Smith, Wind Tunnel Investigation of the Two-Dimensional Airfoil with Pylon-Mounted Stores at Mach Numbers from 0.7 to 0.95, Arnold Engineering Development Center, Report AEDC-TR-73-71, April 1973.
558. L. Ray and N. Coe, Model F-4J (Min-Mod) Performance Data and Substantiation, McDonnell Aircraft Corporation, Report G649, November 1968.
559. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
560. D. Daniels, Effect of Rack Angle on the Initial Launch Disturbance of the Navy Low Drag Bomb Separated from an A-7 Aircraft, Naval Weapons Laboratory, Report TR-2484, October 1970.
561. L. E. Fraenkel, The Theoretical Wave Drag of Some Bodies of Revolution, Ministry of Supply, Aeronautical Research Council, Report R&M No. 2842, May 1951.
562. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
563. G. T. Pursel, AGM-12B Missile Compatibility with the P-3 Aircraft, Naval Missile Center, Report NMC-TM-65-43, August 1965.
564. W. E. Summers, Separation Characteristics of the Black Crow Pod from the F-4C and F-4E Aircraft at Mach Numbers from 0.37 to 0.90, Arnold Engineering Development Center, Report AEDC-TR-71-121, June 1971.
565. L. L. Galigher, Separation Characteristics of the SUU-41 Dispenser from the F-4C Aircraft at Mach Numbers from 0.5 to 0.9, Arnold Engineering Development Center, Report AEDC-TR-68-191, September 1968.

566. P. Lehner, Separation Characteristics of Ten Stores from the F-4E Aircraft at Mach Numbers from 0.33 to 0.92, Arnold Engineering Development Center, Report AEDC-TR-69-157, September 1969.
567. J. R. Myers, Separation Characteristics of the SUU-41, M-117, BLU-1/B, LAU-3/A, and 370-Gallon Fuel Tank from the F-4E Aircraft Equipped with Wing-Leading-Edge Slats, Arnold Engineering Development Center, Report AEDC-TR-71-232, October 1971.
568. J. A. Planchard, A Research and Analysis Program of Studies on the Analysis of Weapon Effectiveness Phase II Results, Volume III - Development of a Two Mode Human Operator Model for a Tracking Task, Air Force Armament Laboratory, Report AFATL-TR-71-110, Vol. III, August 1971.
569. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
570. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
571. F-4J (Min-Mod) Study for the Aerospace Defense Command, Volume II- Detail Specification, McDonnell Aircraft Company, Report G601, November 1968.
572. E. Stadler, and N. Coe, Model F-4 (Mod) Performance Data and Substantiation, McDonnell Aircraft Corporation, Report G650, November 1968.
573. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
574. C. L. Hendrickson, and L. D. Fortner, A-7D Category II Performance and Flying Qualities Evaluation, Air Force Flight Test Center, Report FTC-SD-70-29, November 1970.
575. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
576. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.

577. W. O. Wray, Jr., Wind Tunnel Data Report 1/24-Scale FB-111 Force Model with Third Pivoting Pylon, NASA Langley Research Center Test Numbers 4-718, 4-720, 8-441, General Dynamic Fort Worth Division, Report FZT-12-6018, March 1968.
578. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
579. J. Coble, Separation Characteristics of the SUU-51 Laser-Guided Disperser Munition with Fixed Tail Fins from the F-4C Aircraft, Arnold Engineering Development Center, Report AEDC-TR-71-244, November 1971.
580. D. P. Forsmo, Simulation of Missile Trajectories in Proximity of the Launching Aircraft and Comparison with Flight Test Data, Raytheon Company Missile Systems Division, June 1966.
581. G. F. Unger, A Linear Analysis of Aircraft Store Motion, Massachusetts Institute of Technology, Master's Thesis, September 1969.
582. R. M. Voightsberger, External Store Drag: A Comparison Between Predicted and Flight Test Results for the A-7D, Vought Aeronautics Division, Report 2-53363/1R-8462, August 1971.
583. AFATL Parametric Study of Mutual Interference for M-117 Bombs and a TER, Results from Wind Tunnel Test Conducted at Arnold Engineering Development Center PWT-4T Wind Tunnel.
584. Wind Tunnel Data Report - 1/15 Scale F-11A and F-111B Force Model at Cornell Aeronautical Laboratory, Test Number G52-193, General Dynamics Corporation, Report FZT-12-141, May 1966.
585. The title of this document is available to qualified agencies upon request to AFATL (DLJC), Eglin Air Force Base, Florida 32542.
586. D. W. Hill, Jr. and G. R. Mattasists, Aerodynamic Loads on Four External Stores in the Carriage Position on the A-7D and F-4C Aircraft at Mach Numbers from 0.5 to 2.0, Arnold Engineering Development Center, Report AEDC-TR-74-29, May 1974.
587. External Store Airloads Prediction Technique (U), Vought System Division, Report 2-57110/3R-3103, 7 July 1973.
588. (Installed Rockeye II Store Data on F-4 obtained in Naval Ships Research and Development Center Transonic Wind Tunnel), NSRDC Aviation Department, Washington D.C., March 4, 1971.

589. R. E. Smith, Measured Air Loads for a Free-Fall Weapon on an A-4 Aircraft, Naval Weapons Center, Report NWC TP 4804, October 1969.
590. M. L. Howard, Rockeye II Static Stability Test, Aerodynamics Laboratory, Naval Ship Research and Development Center, Report AL-99, July 1969.
591. D. L. Berry and D. L. Smith, Wind Tunnel Test Results for the Boeing Production Model Conformal Carriage, Boeing Company, Number D186-10013-1.
592. D. C. Cunningham, J. A. Wolfe, J. M. Cooksey, Static Force Tests on a .25 Scale TFD-10 Model over the Transonic Mach Range of .5 to 1.2 (U), Vought Aeronautics Division, Report HSWT Test 295, 2 July 1968.
593. (Captive Trajectory and Isolated SUU-41 (TFD) Store Tests Data on .05 Scale F-4 Series Aircraft), Arnold Engineering and Development Center, Report PC 0880, Test TC0015.
594. Effects of External Stores, F-4C Plots, Arnold Research Organization, Inc., Project PA025, Test 228 and 257.
595. J. M. Whoric, Effects of External Store Parameters on the Aerodynamic Characteristics of the F-4C Aircraft at Mach Numbers from 0.6 to 2.0, Arnold Research Organization., AEDC-DR-75-84, October 4, 1974.
596. J. M. Whoric, Effects of External Store Parameters on the Aerodynamic Characteristics of the A-7D Aircraft at Mach Numbers from 0.6 to 2.0, Arnold Research Organization, Inc., AEDC-DR-74-46, June 3, 1974.

INITIAL DISTRIBUTION

HQS USAF/RDQRM	2
HQ USAF/SAMI	1
HQ USAF/XOXFM	1
AFIS/INTA	1
AFSC/DLCA	1
AFSC/IGFG	1
AFSC/SDZA	1
AFAL/DHO	1
AFWAL/Tech Lib	1
ASD/ENFEA	1
FTD/PDXA-2	1
AFWL/NSC	1
AFWL/NSE	1
AFWL/SUL	1
AUL(AU/LSE-70-239)	2
DDC	2
OGDEN ALC/MMWM	2
TAC/DRA	1
57 FWW/DOS	1
USAFTEWC/TA	1
6510 ABG/SSD	2
HQUSAFE/DOQ	1
HQPACAF/DOO	1
NAV RESRCH LAB, Code 2627	1
NAV SYS COMD, Code 530C	1
NAVAIR SYS COMD, AIR-954	1
NAV SURF WPN CNTR	2
NAV ORDN STN	1
CT-176 TID/TECH PUBS	2
USNWC/Code 533	1
SANDIA LAB	1
THE RAND CORPORATION	1
TACTEC	1
USAFTEWC/TEFA	1
TAWC/TRADOCLO	1
ADTC/SES	1
ADTC/SD23	1
AFATL/DL	1
AFATL/DLOSL	9
AFATL/DLY	1
AFATL/DLJ	1
AFATL/DLJC	5
AFATL/DLJF	1
AFATL/DLJK	1
AFATL/DLJM	1
AFSC/SDTA	1
ASD/ENESS	1